

# Very High Efficiency Solar Cell Modules

T. Vara Pushpa<sup>1</sup> T. Jyothi<sup>2</sup> Challa Babu<sup>3</sup>

<sup>1,2</sup>UG Students <sup>3</sup>Associate Professor

<sup>1,2,3</sup>Department of Electrical and Electronics Engineering

<sup>1,2,3</sup>Audisankara College of Engineering and Technology, Gudur, A.P, India

**Abstract**— The Very High Efficiency Solar Cell (VHESC) program is developing integrated optical system–PV modules for portable applications that operate at greater than 50% efficiency. We are integrating the optical design with the solar cell design, and have entered previously unoccupied design space. Our approach is driven by proven quantitative models for the solar cell design, the optical design, and the integration of these designs. Optical systems efficiency with an optical efficiency of 93% and solar cell device results under ideal dichroic splitting optics summing to 42\_7W2\_5% are described.

**Keywords:** high performance; module architecture; solar cell efficiency

## I. INTRODUCTION

High efficiency modules are being developed based on the co-design of the optics, interconnects, and solar cells. This architecture significantly increases the design space for high performance photovoltaic modules in terms of materials, device structures, and manufacturing technology. It allows multiple benefits, including increased theoretical efficiency, new architectures which circumvent existing material/cost trade offs, improved performance from non-ideal materials, device designs that can more closely approach ideal performance limits, reduced spectral mismatch losses, and increased flexibility in material choices. An integrated optical/solar cell allows efficiency improvements while retaining low area costs, and hence expands the applications for photovoltaics [1-3]. It allows a design approach which focuses first on performance, enabling the use of existing state-of-the-art photovoltaic technology to design high performance, low cost multiple junction III–Vs for the high- and low energy photons, and a new silicon solar cell for the mid-energy photons, all while circumventing existing cost drivers through novel solar cell architectures and optical elements. The recent studies on solar systems are presented [4-10].

## II. PHOTOVOLTAIC SYSTEM ARCHITECTURE

The new system architecture is based on a “parallel” or lateral optical concentrating system, which splits the incident solar spectrum into several bands, and allows different optical and photovoltaic elements in each band. The optics and the cells are co-designed to achieve the maximum conversion efficiency of the module. An example of the photovoltaic system architecture is shown in Figure 1. The new architecture integrates optical and solar cell design, allowing a much broader choice of materials, and circumventing many existing cost drivers. This architecture enables the inclusion of multiple other innovations and leads to higher efficiency, both at solar cells and module level. The optical system consists of a tiled non-imaging concentrating system, coupled

with a spectral splitter that divides the solar spectrum into a given number of bands.

### A. Photovoltaic Architecture

The lateral solar cell architecture increases the choice of materials for multiple junction solar cells, by allowing the solar cell in each spectral band to be optimized independently of the others. In this way, the lattice and current matching constraints are reduced.

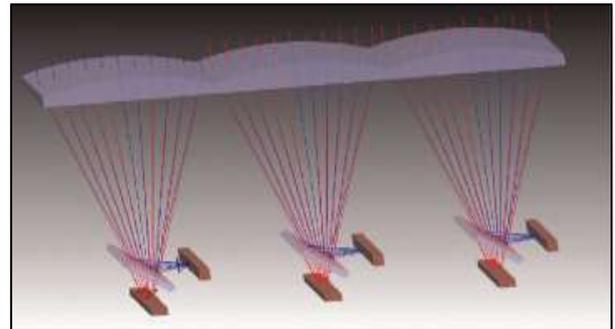


Fig. 1: Schematic showing the optical elements in the lateral optics, including a static concentrator and spectral splitting

Further, since the devices do not need to be series connected, spectral mismatch losses are reduced, important for tandems in terrestrial environments. Finally, by contacting the individual solar cells with individual voltage busses, the need for tunnel junctions is avoided. Since each material requires unique tunnel contact metallurgy, eliminating tunnel junctions is a substantial simplification. An additional benefit of this architecture is the opportunity to use different solar cell areas within the system which leads to different levels of concentration of the sunlight (the aperture collecting the sunlight divided by the solar cell active area).

### B. Lateral Optical System

To achieve the benefits of the new PV system architecture, a new optical element is designed, which combines a non-imaging optical concentrator (which does not require tracking and is called a static concentrator) with spectral splitting approaches that split the light into several spectral bands. This system is called a parallel or lateral concentrator, since solar cells are not placed vertically or optically in series. These optical elements are tiled, with the overall optical module being an affordable and manufacturable optical element, which incorporates both static concentration and a dichroic element for spectral splitting as shown in Figure 2. The unique features of the optical system are an emphasis on high system optical efficiency, the use of dichroic mirrors for spectral splitting, and the design of the system to be thin enough to allow integration with other products. For example, previous approaches of

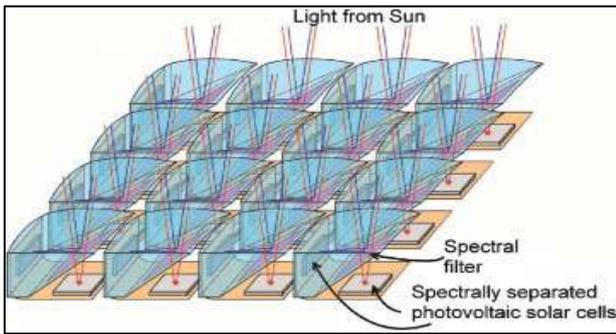


Fig. 2: Schematic of the solar system architecture

Which combines new optical elements static concentrators have not been practical because the thickness of the optical elements is too large for Conventional modules. Further, previous optical systems, particularly spectral splitters, have suffered from reduced optical efficiencies. The use of an integrated system and small area dichroic mirrors allows both the efficiency and cost issues to be overcome. The optical system does not require tracking and has no moving parts. The critical metric for the module development is module efficiency. Module efficiency consists of two terms: (1) optical efficiency which is the amount of sunlight that is directed to the solar cells- weighted by the energy in each band of sunlight and (2) the sum of the power from each solar cell.

### III. OPTICS DESIGN AND RESULTS

The optical design is based on non-symmetric, non-imaging optics, tiled into an array. The central issues in the optical system are the optical efficiency and the amount of time over which the sunlight remains focused on the solar cells (tracking time). Because the modules are designed for portable electronics, the concentrators are designed to accept light for several hours, rather than over the course of an entire day. In order to make a system which has no moving parts and can work with maximum pointing error and maximum tracking time, proof of concept (POC) designs were created that consist of four components, as shown in Figure 3. These are: (1) a front lens array using non-spherical lenses (toroids or crossed cylinders); (2) a hollow pyramidal reflective concentrator

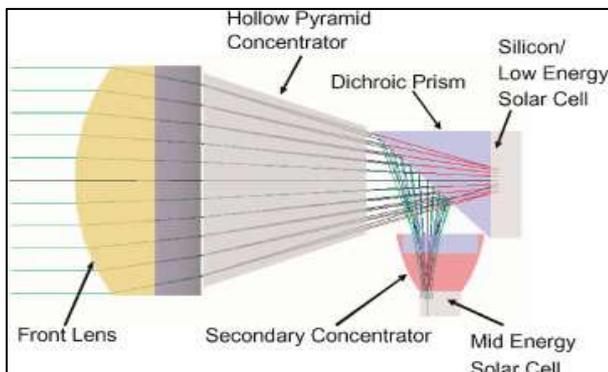


Fig. 3: Schematic of the fabricated POC

array which increases the performance of the system for light which is not normal to the module; (3) a non-imaging solid concentrator on the solar cell converting photon energies between 2.4 and 1.4 eV (called mid energy solar cells); and (4) a dichroic prism which reflects the light above

1.4 eV and passes light below this energy. The fabricated POC has four-unit cells arranged in a 2x2 array. In addition to the optical elements, the module contains a motherboard that holds the silicon chips, two daughter boards that hold the mid-E chips, and a pair of aluminium spacers acting as heat sinks. The front lens array sits on top of the pyramid concentrator array. Each of two dichroic prisms sits on top of two adjacent silicon chips, attached by means of an optical cement. The secondary concentrators are attached with optical cement to each of the mid-E chips. The aluminium spacers are then used to connect and align the pyramid concentrator array with the circuit board with the appropriate distance between the two components. The total thickness from the refractive lens to the motherboard is 11 mm. The front lens array is made from diamond-turning plastic. The pyramid concentrator array and the secondary concentrators are moulded plastic pieces. The dichroic prisms are made of BK7 glass. Figure 4 is a picture of the assembled prototype.

The trans-mission efficiency of the optical system was determined by measuring the reflectivity and transmission for all AR coatings, the material absorption for the optical elements, and dichroic



Fig. 4: Assembled crossed cylinders POC

coatings. Using these data in a commercial optical design software shows that the optical transmission under weighted average AM1\_5G spectrum is greater than 93%. Further, since the manufacturing tolerances of the optical components are an order of magnitude lower than for other optical systems, the dominant loss is the reflectivity and transmission. Thus overall, the optical system has a weighted average efficiency of >93% under AM1\_5G. The results are shown in Figure 5.

Since the module is designed for portable battery charging applications, the time in which the module is stationary is relatively short. The tracking time or field of view is limited by the size of the photovoltaic cells and “beam walk” or the tendency of the spot of energy on the detector to move as the angle of the sun changes. Experiments were performed to measure the efficiency of the POC prototype as a function of the pointing error, i.e., the efficiency of the system when it is not aimed directly at the sun. These measurements were made in the lab using the solar simulator with an 18\_3mm diameter aperture in front of the focusing element. Figure 6 shows the efficiency of the total system for off-axis pointing in the East/West direction.

### IV. EFFICIENCY MEASUREMENT METHOD

The efficiency of a concentrator cell is usually measured without regard to the design or performance of the optics.<sup>2</sup>

The efficiency of a lens-cell assembly reflects both the optical and cell efficiencies. No standard exists for the characterization of the performance of a collection of concentrator cells designed for use under optics that split the spectrum

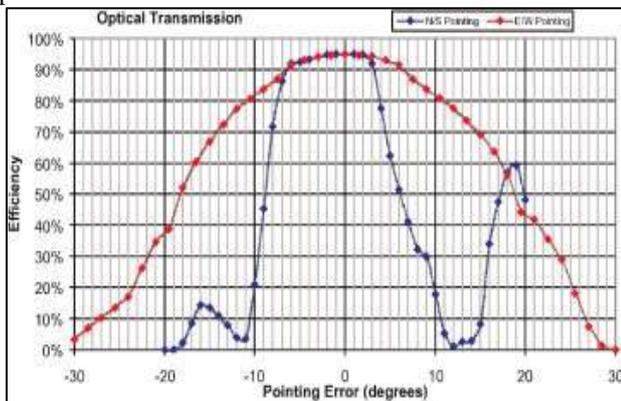


Fig. 5: Optical transmission as a function of angle away from normal to the module

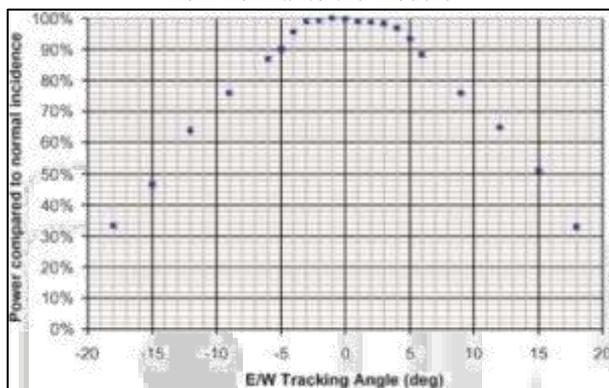


Fig. 6: Performance of the POC with East/West tracking angle

into two or more parts. Consensus standards currently use a global reference spectrum for flat-plate measurements and a direct reference spectrum for concentrator measurements, but a reference spectrum for a low-concentration application has not been defined. Thus, cell performance measurements for the new PV architecture require two new elements: (1) definition of the spectrum relevant to this low concentration application and (2) identification of a methodology for quoting an aggregate efficiency for a set of cells that each use a different portion of the spectrum. These two issues have been addressed by (1) choice of the AM1\_5 Global spectrum,<sup>3</sup> and (2) the solar spectrum being split, mathematically, either by defining dividing wavelengths or by any other method, such that the spectral parts sum to give the one-sun reference spectrum. Each cell is then measured in the conventional way using the portion of the spectrum assigned to it. For the results presented here, the spectrum was divided into three sections with the GaInP/GaAs cell measured above the GaAs band gap, 871 nm, the GaInAsP/GaInAs cell with light beyond 1100 nm, and the silicon beyond 871 nm. The solar cells are measured over a range of concentrations, but the VHESC Program reporting conditions were taken as 20 suns for the GaInP/GaAs tandem stack and the GaInAsP/Ga-InAs tandem stack and 8\_7 suns for the transparent silicon solar cell. The

silicon solar cell and the GaInAsP/GaInAs solar cells were measured independently and were not in actual optical series.

There are overlaps in the spectral responses of cells. However, the effects on the measured values for efficiency are small. In the case of the GaInP/GaAs two terminal tandem stack, the top cell (InGaP) is the current limiting cell. Accordingly, the small amount of current available beyond 871 nm will not be collected. The dichroic mirror itself will have a 10–50 nm transition region. So it must be designed so that photons near the band edge are transmitted to the silicon solar cell. The added complexity of including this dichroic transition does not lead to simple, reproducible measurements. In the case of the three terminal GaInAsP/GaInAs bottom cells, the choice of an 1100 nm cut off for the measurement will lead to a slightly lower efficiency for the GaInAsP cell than it will actually have in the system because, in the system the cell will receive some photons of wavelength less than 1100 nm and the response of this cell is quite good in this region. Thus, the result of using sharp cut offs at 871 and 1100 nm is that the efficiencies of the silicon and the GaInAsP cells are conservatively measured. However, the use of sharp cut offs at the band edges provides a simple, reproducible, conservative method for measuring the cell efficiencies. Other methods which might be proposed for more accurate measurement are not simple and do not provide easy comparisons between cell performance in different optical systems. The quantitative performance measurement of each individual solar cell uses reference cells to characterize the intensity of the solar simulator and a spectral mismatch correction factor to correct for differences between the test and reference cell responses, and differences between the test and mathematically calculated reference spectrum relevant to that cell. The most difficult measurement is for the low-bandgap series-connected tandem solar cell. Accurate measurement of this cell requires adjustment of the incident spectrum so that each of the junctions generates the correct photocurrent. Multi-source simulators provide a means for obtaining the desired spectrum, but today's multi-source simulators do not achieve the concentrations desired for this project. Separate electrical contacts made this device easier to fabricate and measure. Detailed description of the measurement conditions has been previously given.

## V. SOLAR CELL DESIGNS AND RESULTS

The central approach in choosing among the expanded material design space allowed by the optical elements is to first design for performance, eliminating only those aspects fundamentally incompatible with ultimately achieving low cost and then design for low cost manufacture. This approach involves parallel approaches in the initial phases, such that success in no case depends on a single approach. The increased design space provides a path to circumventing lattice and current matching constraints imposed by monolithic, series connected tandems. For lattice-matched (or close to lattice-matched metamorphic) tandems, only a limited number of materials are available. However, in the lateral optical approach, the materials can be chosen for their performance potential. This is particularly important for the very high-energy band gaps required for the five and six

junction tandems. The design emphasis on high performance leads to a core approach based on using materials that have demonstrated the highest performance for the wavelength range close to their band gap. For the solar cells with band gaps in the range between 1.4 and 1.9 eV, the highest performance materials are ternary compounds from the GaInAsP materials system<sup>5–8</sup> with silicon being the highest performing material for the photons<sup>9,10</sup> with energy near 1.0 eV. The optimum band gaps, and in some cases materials for the proposed solar cell, are shown in Figure 7. Included are de-rating factors to account for unavoidable losses such as parasitic resistances and reflection. The proposed six-junction solar cell, including the derating factors, can achieve an efficiency of 54% at 20<sub>x</sub>.

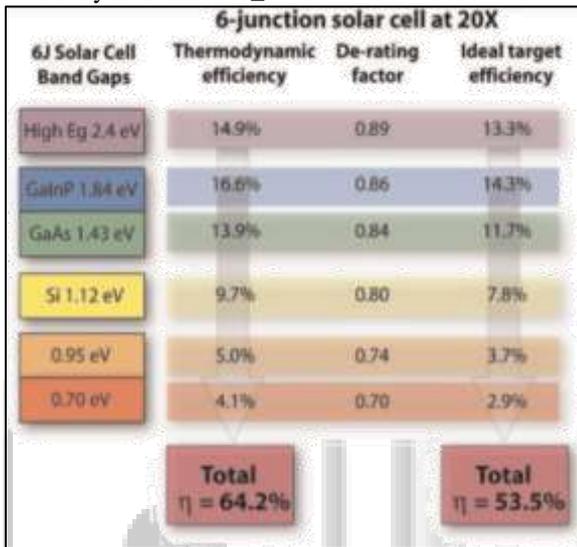


Fig. 7: Predicted contributions of each solar cell in the proposed six-junction design

When coupled with an optical system in excess of 93%, the system shows an overall system efficiency, not just the solar cell efficiency, of 50%. Figure 7 does not incorporate the additional advantage of using different levels of concentration of the sunlight.

#### A. InGaN Solar Cells

The III-nitride material system has several features that allow both high performance multijunction solar cells and low cost. These features include: an existing industry centred around the nitrides; high radiative efficiency even with high dislocation densities;<sup>11</sup> high mobilities, allowing good collection; a large piezoelectric constant, allowing control of surface recombination;<sup>12,13</sup> and the availability of direct high-band gap materials, with band gaps above 2.4 eV. Such high band gaps are not available in other established material systems, but are necessary for multiple junction solar cells with a large number of cells. Coupled with these advantages are also substantial challenges. These include the difficulty in achieving p-type conduction in material with 2.4 eV or below,<sup>14</sup> and phase separation in material with higher concentrations of indium leading to increased recombination. We experimentally demonstrated the III-V nitrides as a high-performance photovoltaic material with an open-circuit voltage (Voc) of 2.4V and an IQE as high as 60%. GaN and high-band gap InGaN solar cells are designed using modified PC1D software,<sup>15</sup> grown by standard industrial metal

organic chemical vapor deposition (MOCVD), fabricated into devices of variable sizes and contact configurations and characterized for material quality and performance. The material is primarily characterized by X-ray diffraction and photoluminescence to understand the implications of crystalline imperfections on photovoltaic performance. Phase separation within the material and high contact resistances are identified as the two major efficiency loss mechanisms. The design of the III-nitride solar cell consists of a Lower-band gap InGaN region sandwiched between the top p- and the supporting n-type GaN junctions. A typical I-V curve of a high-band gap solar cell (3.0 eV or greater) is shown in Figure 8. The light source used is modified from a typical one-sun spectrum by increasing its UV content to amplify the response of the solar cell. The Voc of the solar cell is dominated by the lower-band gap phase separated InGaN. A central challenge in these devices is the formation of a Schottky barrier at the nonoptimal p-GaN-Ni metal contact interface, which opposes the light-generated current so that the current asymptotically approaches zero prior to the device reaching its Voc; this Schottky effect is also confirmed through PC1D simulation. These effects mean that existing devices have a semi-transparent current spreading layer consisting of full metal coverage on the top of the solar cell. In spite of the relatively lower short-circuit currents (Jsc) due to light absorption by the top current spreading layer, the full-metal contacts with p-GaN yield lower series resistance around 30–50V. These solar cells demonstrate Voc's as high as 2.4V and fill factors (FF) about 78%.

#### B. GaInP/GaAs Solar Cells

Available path to increased efficiency for multi-junction monolithic solar cells is to independently optimize the voltage and current production of each cell to the solar spectrum. Solar cell modelling has shown that the independently interconnected or multi-terminal design is not constrained by minimum cell current and is less sensitive to band gap as compared to series connected solar cell designs. However, it is more complex with respect to fabrication of the solar cell, and in terms of power delivery. The I-V curve of the best GaInP/GaAs tandem solar cell is shown in Figure 9.

#### C. Silicon Solar Cell Filtered by GaAs

A central feature of our proposed approach is to leverage the cost/performance benefits of existing solar cell technology to achieve both high performance and low risk. While laboratory silicon solar cells have demonstrated high performance, a central challenge is to incorporate the high-performance features in a low-cost solar cell. Several innovations in solar cell design

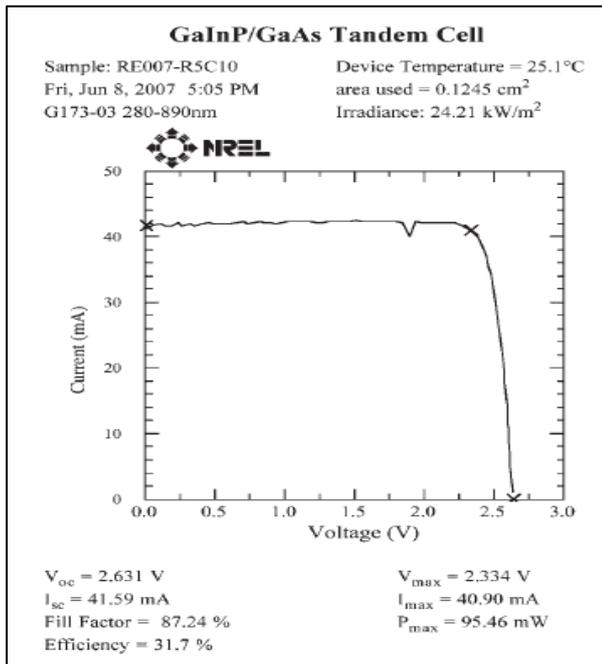


Fig. 9: I-V curve of the best GaInP/GaAs solar cell at 20x.

This solar cell was fabricated by Emcore make this possible, including the move to thinner silicon junctions, the passivation of Si surfaces by means other than insulators, the use of an optically transparent substrate and recently demonstrated high minority carrier lifetimes in n-type silicon. Silicon solar cells were fabricated using the deposition of the wide-band gap semiconductor, amorphous silicon to passivate the surfaces, and achieve higher voltages and efficiencies. The device structure is a hetero-junction between crystalline silicon and amorphous silicon, thereby utilizing the excellent passivation by the amorphous silicon to reduce recombination and maximize efficiency. Silicon hetero-junction solar cells are ideally suited to the VHESC program since the III-V based top cell removes short wavelength light where the absorption in the amorphous silicon window layer is otherwise a problem, and the effective concentration of 5.6 suns shifts the operating point away from the high idealist factor region experienced by the one sun cells. The cell design is pictured in Figure 10. The centre section in blue is the active area (8mm x 2 mm) of the

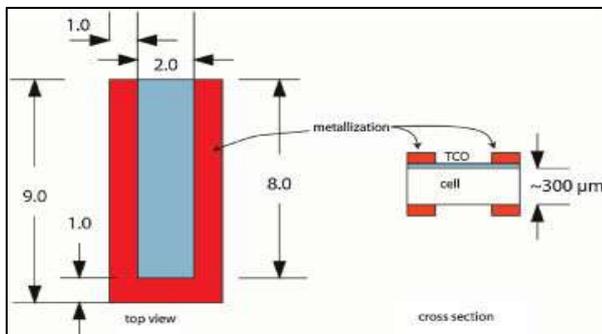


Fig. 10: Cell design in millimetres. Metallization masks have been fabricated to these dimensions cell and is transparent to below band gap infrared light. The outer section in red is the metallization for the contacts. The cell dimensions are small enough to allow conduction along the transparent conducting oxide (TCO), and through the cell

bulk, with minimal resistance losses. The best filtered (wavelengths above 871 nm) results at 8.7x as shown in Mono-Si Cell, Figure 11.

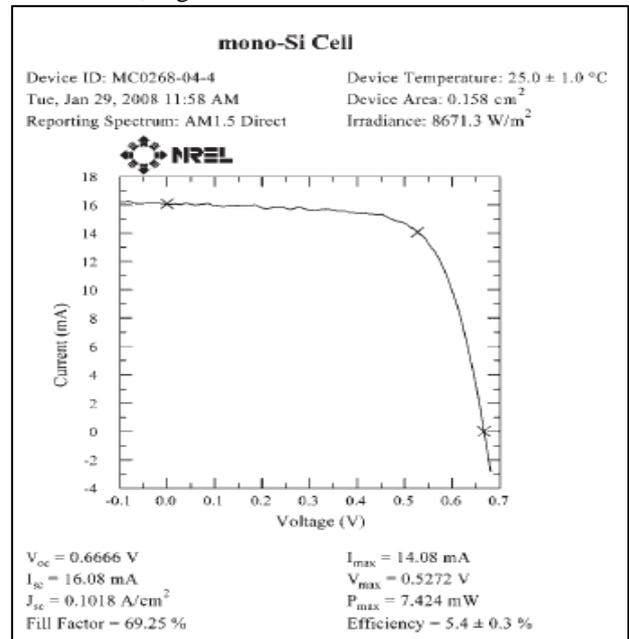


Fig. 11: Best silicon solar cell under idealized GaAs filter at 8.7x This solar cell was fabricated by the University of Delaware

#### D. GaInAsP/GaInAs Bottom Tandem Cells

The low-band gap solar cells consist of two independently connected (three terminals) GaInAsP/ GaInAs solar cells. The 3-terminal approach for the monolithic bottom tandem solar cell allowed measurement of the performance of each sub-cell in the tandem structure independently, substantially simplifying the performance characterization. Since the sub-cells are not serially connected, a tunnel junction is not included in the tandem structure, which simplifies the growth procedure. The increased flexibility, better characterization, and simplified structure allow a high efficiency sub-cell. This in turn allows an increase in efficiency by lowering the band gap of the lowest energy sub-cell. A tandem device with sub-cell band gaps of 0.92 and 0.69 eV has been demonstrated with an efficiency of 6.2% at 20 suns under an idealized Si filter (1100 nm cutoff), global spectrum at 258C. The silicon solar cell and the GaInAsP/GaInAs solar cells were measured independently and were not in actual optical series.

#### E. Sum of the Solar Cell Efficiencies

The sum of the solar cell efficiencies, as described in the Section 4 “Efficiency Measurement method,”

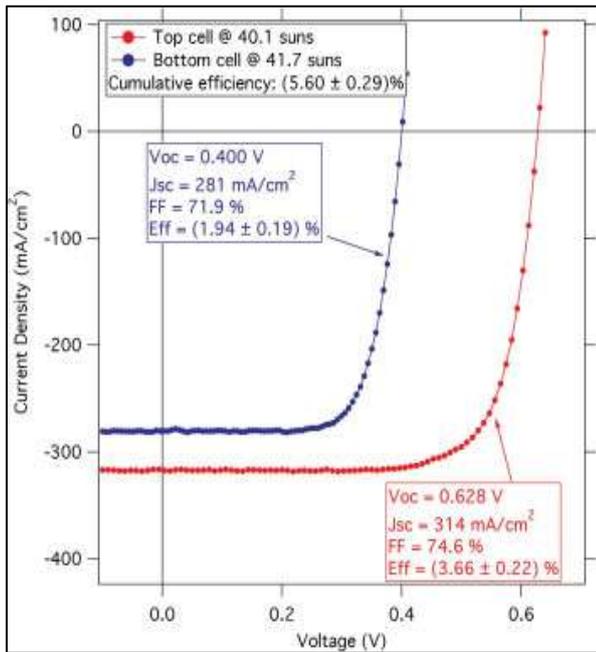


Fig. 12: IV data for the top and bottom sub-cells of a 3-terminal GaInAsP/GaInAs tandem cell 42xsuns under an idealized Si filter. The combined efficiency of the sub cells is 5.6%. This solar cell was fabricated by the National Renewable Energy Laboratory (NREL). The measurement was independently confirmed at NREL gives the overall efficiency of the PV devices. These efficiencies are summarized below:

GaInP/GaAs = 31.7%  
 Silicon (filtered by GaAs) = 5.4%  
 GaInAsP/GaInAs (filtered by Si) = 5.6%  
 TOTAL = 42.7 ± 2.5%

These results demonstrate the potential of the integrated optical approach, which allows a greater range of materials, and hence a larger number of band gaps. These devices represent a substantial increase in efficiency over existing tandem approaches<sup>18, 19</sup> particularly given that the results are measured at 20x rather than at high concentration typical of tandem devices.

## VI. CONCLUSIONS AND NEXT STEPS

The results of 93% optical efficiency combined with the 42.7 ± 2.5% sum of the solar cell efficiencies are a good indication of the power of the new PV Architecture. The next steps are to combine them into a module, improve the performance of the module, implement power conversion circuitry, and transfer to production. The Watt hours delivered to the battery need to be optimized. The power of the collaborative approach is demonstrated by the number and breadth of organizations that contributed to the new architectural design and implementation. The optics designs included contributions from government, universities, and industrial participants. The system reported here features three types of solar cells (five-junctions)-one made by industry, one by a Government Lab, and one by a University. The continued development of this co-design approach to the optics interconnects and solar cells will lead to 50% efficient modules.

## REFERENCES

- [1] Initial results for this approach were presented at the 2<sup>nd</sup> European Photovoltaic Solar Energy Conference, Milan, Italy, September 3, 2007.
- [2] Wang A, Green M, Zhao J. 24\_5% efficiency silicon PERT cells on MCZ substrates and 24\_7% efficiency PERL cells on FZ substrates. *Progress in Photovoltaics* 1999; 7(6): 471–474.
- [3] Brandt O, Wu'nsche H-J, Yang H, Klann R, Mu'llha'user JR, Ploog KH. Recombination dynamics in GaN. *Journal of Crystal Growth* 1998; 189/190: 790–793.
- [4] Babu Challa, and P. Ponnambalam. "The role of thermoelectric generators in the hybrid PV/T systems: A review." *Energy Conversion and Management* 151 (2017): 368-385.
- [5] Babu, Challa, and P. Ponnambalam. "The theoretical performance evaluation of hybrid PV-TEG system." *Energy Conversion and Management* 173 (2018): 450-460.
- [6] Ponnambalam, P., Praveenkumar, M., Babu, C., & Raj, P. D. (2017). Analysis of Stacked Multicell Converter with Fuzzy Controller. In *Proceedings of Sixth International Conference on Soft Computing for Problem Solving* (pp. 318-330). Springer, Singapore.
- [7] Leela Madhav.k, Challa Babu, Dr.P.Ponnambalam, Ashutos Mahapatra., "Fuzzy Logic Controller for Nine Level Multi-Level Inverter with Reduced Number of Switches" IEEE conference i-PACT-2018, DOI: 10.1109/IPACT.2017.8244938.
- [8] Ponnambalam, P., K. Muralikumar, P. Vasundhara, S. Sreejith, and Babu Challa. "Fuzzy Controlled Switched Capacitor Boost Inverter." *Energy Procedia* 117 (2017): 909-916.
- [9] Kumar DD, Babu C, Reddy KJ, Kumar K, Kumar NK. An improved P&O MPPT control algorithm for increasing power extraction efficiency of solar PV module. In *IOP Conference Series: Materials Science and Engineering* 2019 Oct (Vol. 623, No. 1, p. 012020). IOP Publishing.
- [10] Babu, Challa, and Ponnambalam Pathipooranam. "PV Module Temperature Estimation by Using ANFIS." *Soft Computing for Problem Solving*. Springer, Singapore, 2020. 311-318.