

# Examining The Buckling Strength Of Stiffened Steel Plates That Have Longitudinal Stiffeners Under Uniaxial Compression.

Mr. Adil Abass Lone<sup>1</sup> Mogili Srikanth<sup>2</sup> Pavan Sai Gopal Kundeti<sup>3</sup> Charitha Perivemula<sup>4</sup>

<sup>1</sup>Ph.D. Research Scholar <sup>2,3</sup>M. Tech student <sup>4</sup>B. Tech student

<sup>1,2,3,4</sup>Department of Civil Engineering

<sup>1,2,4</sup>BIHER, Chennai, India <sup>3</sup>Koneru Lakshmaiah Educational foundation, A.P, India

**Abstract**— The importance of achieving increased stiffness with a high strength to weight ratio can be seen in many technical fields, particularly in the construction of ships and aeroplanes. Steel plates that have been strengthened are a frequent structural component. Use stiffeners of various sizes and shapes to stiffen plates in both the longitudinal and/or transverse directions. The critical stress at which the plate collapses is significantly raised by the stiffeners since they not only distribute the load across the smaller panels of the plate but also carry a portion of the load. In most cases, stiffened plates are made stronger by the application of stiffeners. Buckling is often how stiffened plates fail. the size of the subpanel, the form and size of the stiffener, and the number of evenly spaced stiffeners, among other aspects, are shown to have a significant impact on the final product.

**Keywords:** Stiffened Plates; Buckling Analysis; Shell Element; Beam Element

## I. INTRODUCTION

Composite materials are known to have high specific modulus, high specific Stiffeners provide improvement to load carrying capacity of structures. The benefit of stiffening of a structure lies in achieving lightweight and robust design of the structure. For this purpose they have wide use in structural engineering domain. Specially, stiffened plates are used in critical and sensitive structures such as in aircrafts, ship hulls and box girders in which safety and a perfect design is crucial. Buckling is the one of the most complex phenomenon that is inevitable for heavily axially loaded stiffened plate structures. For this purpose, it is necessary to carry a deep interest and investigation about their responses under expected loads to design such structures safely. In structural engineering, it is one of the first priorities to save weight, without loss of any

Strength in the used of structural elements against subjected loads. The approach of the uses of stiffeners to improve structural response is simple, but the practical stiffened plate design is a complex task. Due to involving many design variables, a complete understanding of response of such structures is not fully figured out. Therefore, a stiffened plate is developed using Ansys program for evaluating their buckling critical load factor by varying the plate thickness and stiffener thickness to obtain maximum efficiency from stiffened plates.

According to Troitsk, the development of stiffened plates was probably based on the observation of existing forms of nature. From an engineering point of view, manipulating the distribution of material in a structural member is the most efficient way to resist stress and deformation economically. The use of stiffened plates began in the nineteenth and early twentieth century, mainly in the

construction of steel bridges, hulls of ships and aircraft applications.

In the last three decades, extensive experimental, numerical and statistical studies have been conducted on the behavior and ultimate load carrying capacity of stiffened steel plate panels with longitudinal stiffeners. Despite a large number of researchers involved, the behavior of stiffened steel plates has been only investigated to certain extent. The earlier research work concentrated on the buckling behavior of stiffened steel plates under uniaxial compression [2].

Sheikh et al was investigated stability of stiffened steel plates under uniaxial compression and bending using finite element method. The parameters investigated where; the transverse slenderness of the plate, the slenderness of the web and flange of the stiffener, the ratio of torsional slenderness of the stiffener to the transverse slenderness of the plate, and the stiffener to plate area ratio [15]

Kumar and Mukhopadhyay [10] were presented a stiffened plate element for stability analysis of laminated stiffened plates that the basic plate element was a combination of Allman's plane stress triangular element and a discrete thick plate and includes transverse shear effects.

Brubak was studied an approximate semi-analytical computational model for plates with arbitrarily oriented stiffeners and subjected to uniaxial loading. Their estimation of the buckling strength is made using the von Mises' yield criterion [6]. Peng investigated a mesh-free Galerkin method for the free vibration and stability analyses of stiffened plates via the first order shear deformable theory.

Vörös focussed on the application of the new stiffener element with seven degrees of freedom per node and subsequent application in determining frequencies, mode shapes and buckling loads of different stiffened plates. The development of the stiffener is based on a general beam theory and includes the constraint torsional warping effect and the second order terms of finite rotations. Riks investigated implementation of the finite strip (FS) method that extends the scope of the determination of the post-buckling stiffness of stiffened panels for wing structures [16].

Todoroki and Sekishiro was proposed a fractal branch and bound method for optimizing the stacking sequences to maximize the buckling load of blade-stiffened panels with strength constraints. Bedair was explained the influence of stiffener location on the stability of stiffened plates under combined compression and bending. He idealized the structure as assembled plate and beam elements rigidly connected at their junctions. Various researches have been carried out to optimize the response of plates[5].

This paper is to investigate the shape and size optimization of stiffened plates for improving the critical buckling load using various analysis and optimization method. In these studies, effects of one or two parameters on

buckling load were investigated. The objective of this study is to carry out to determine the critical buckling load.

## II. BUCKLING

For a layman, the word ‘Buckling’ evokes an image of failure of a structure, which has compressed in some way leading to a sudden catastrophic failure involving large deformations. But from the scientific and engineering point of view, the buckling is a phenomena that generally occurs before deformations are very large i.e. to the unaided eye, the structure appears to be un-deformed or only slightly deformed

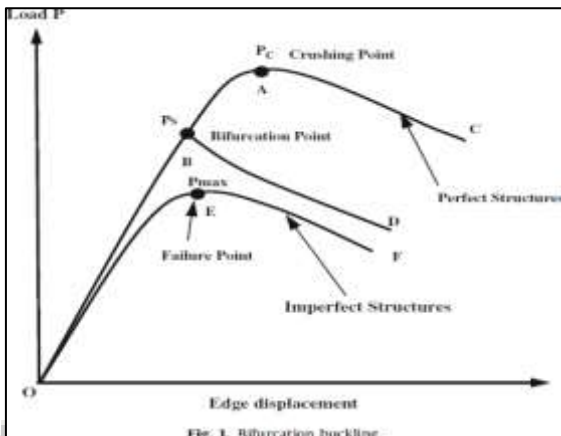


Fig. 1. Bifurcation buckling.

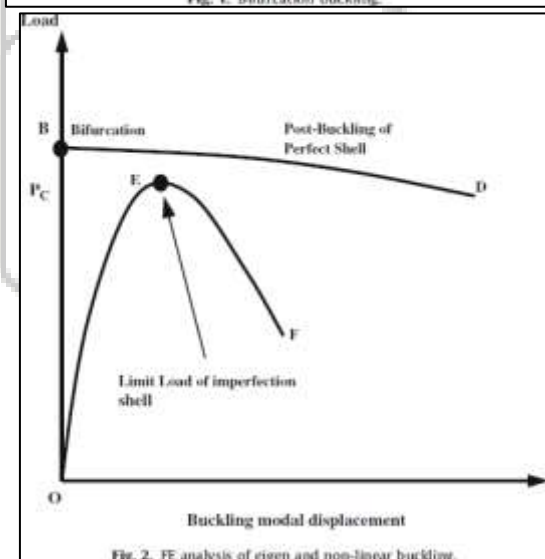


Fig. 2. FE analysis of eigen and non-linear buckling.

When a thin cylindrical shell is axially compressed, it deforms approximately in an axisymmetrical form along the equilibrium path OA as shown in Fig.1 until maximum or limit load  $P_c$  is reached at point A. The perfect thin cylindrical shell will fail, following either the path OBAC along which it continues to deform axisymmetrically or in some other path OBD along which it first deforms axisymmetrically up to critical load  $P_c$  at bifurcation point B and then asymmetrically from B to D.

Limit point or Snap through buckling occurs at point A and bifurcation buckling occurs at point B. The equilibrium path OBAC corresponding to axisymmetric mode of deformation is called the fundamental or primary or pre-buckling path; the post buckling path BD, corresponds to non- axisymmetric mode of deformation and is called the secondary or post-buckling path.

In Fig.2, the load is plotted as a function of bifurcation buckling mode deflection. In case of perfect structures, since the bifurcation buckling mode is orthogonal to pre-buckling displacement pattern of perfect shell, its amplitude remains zero until the bifurcation point ‘B’ is reached. The curve BD implies that the post buckling state is unstable, since, load carrying capacity decrease with increasing amplitude of bifurcation buckling mode deformation.

In case of real structures, which contain unavoidable imperfections, there is no true bifurcation buckling. All real structures are imperfect and their equilibrium path is similar to the load-lateral deflection curve EF as shown in Fig.2. The amplitude of lateral deflection increases with increase in load until instability via non-linear snap-through or collapse at the reduced load  $P_{max}$ . The difference between the critical bifurcation load  $P_c$  of the perfect structure and the collapse load  $P_{max}$  of the imperfect structure depends on the amplitude of the initial imperfections.

## III. FE ANALYSIS

### A. Validation of FE Model

To initiate the FE analysis, the initial geometry of the structure must be generated. Table.1&2 shows P1R and P2R model of the investigated of two types of stiffened plates. Width and length of plates will be constant during FE analysis procedure. Based on the type the stiffened plates are analyzed for the following cases:

- 1) Thicknesses of the plate and stiffener
- 2) Height of the stiffener.
- 3) Location of the stiffeners.

Using different shell element the stiffened plates will be analyzed. Among those we will select which gives the better results for the P1R and P2R model.

Types of shell element namely,

- 1) Shell43
- 2) Shell93
- 3) Shell181
- 4) Shell281

Finite element method can analyze structures which are simply supported on diaphragms at two opposite edges with the remaining edges arbitrarily restrained, and the cross section does not change between the simply supported ends. The loaded sides of plates are simply supported. The plates are loaded under uniformly distributed compression force in stiffeners direction. Force applied as a uniformly distributed compressive load over the plate and stiffeners.

### B. Material Properties

The following material properties are used Material: STEEL Poisson’s ratio: 0.3

Description	Minimum (m)	Maximum (m)
Thickness of plate	0.004	0.0048
Thickness of stiffener	0.005	0.007
Height of the stiffener	0.028	0.031

Table 1: Lower and upper bounds of thickness of plate and Stiffener

Parameter	P1R	P2R
Young’s modulus(N/m <sup>2</sup> )	1.81E11	1.95E11
Plate Length (m)	0.650	0.650

Plate Breadth	0.650	0.651
Plate Yield stress (N/m <sup>2</sup> )	218E6	224E6
Stiffener Yield Stress (N/m <sup>2</sup> )	390E6	390E6
Plate Thickness (m)	0.0044	0.0044
Stiffener Height (m)	0.030	0.030
Stiffener thickness (m)	0.007	0.007

Table 2: Parameters for P1R and P2R model

C. Boundary Condition

Fig 3 &4 Boundary condition for P1R model.

The stiffened plates were loaded in axial compression along the stiffeners. Also in their tests the simply supported boundary conditions were assumed in the models.

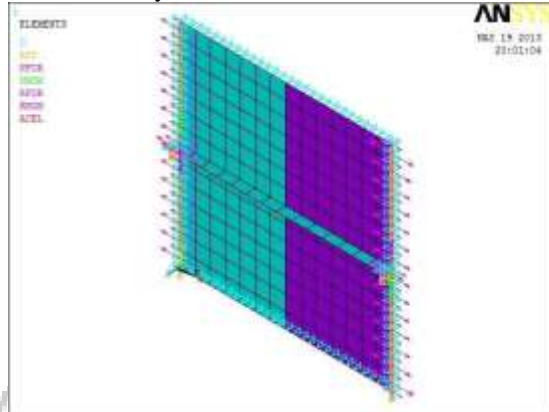


Fig. 3: Boundary Condition for P1R Model

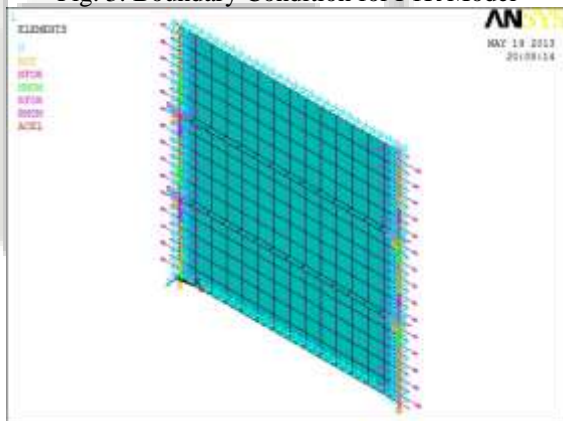


Fig. 4: Boundary Condition for P2R Model

- Top side – simply supported boundary condition Bottom side- simply supported boundary condition
- Left side- simply supported boundary condition and ‘Rot Y’ will be constrained.
- Right side – translation of X and Y will be constrained

D. Geometrical Imperfections

Uniform axial pressure was applied first on the stiffened plate model and a linear elastic finite element analysis was carried out. This analysis was repeated in a trial and error sequence of calculations so that the magnitude of maximum deflection of plate reached. At this time linear buckling load will be added with the initial deflection of the plate and after that the nonlinear analysis will be carried out. For P1R model  $W/tp=69\%$  of the plate and P2R model  $W/tp=25\%$  of the plate is taken from the Ghavami experiment.

SHELL	Reference Value N/mm <sup>2</sup>	
	P1R Model=169.73	P2R Model=155.232
SHELL43	166.49	164.87
SHELL93	161.57	156.90
SHELL181	167.15	144.32
SHELL281	160.15	156.99

Table 3: Buckling strength for P1R and P2R model

Shell type	Reference value	Obtained value	Ratio
Shell43	169.73	166.497	0.980953
Shell93	169.73	161.5718	0.951934
Shell181	169.73	167.1515	0.984808
Shell281	169.73	160.156	0.943593

Table 4: Buckling strength ratio for different shell element (P1R)

Shell type	Reference value	Obtained value	Ratio
Shell43	155.232	164.32	1.058545
Shell93	155.232	156.9028	1.010763
Shell181	155.232	144.32	0.929705
Shell281	155.232	156.9996	1.011387

Table 5: Buckling strength ratio for different shell element (P2R)

The FE models are analysed using different types of shell element and the results are tabulated for the two models namely P1R and P2R. From the tabulated results we conclude that the buckling strength ratio for Shell 93 elements gives better results. So shell 93 element is used for the work to carry out the parametric study.

IV. RESULTS AND DISCUSSION

In order to validate the results obtained from the analysis, first FE stiffened plate models are generated as per the geometric parameter given in ref [1] and the same is presented in Table3. These models are analyzed using ANSYS Non-linear buckling analysis module assuming simply supported boundary condition taking Young’s modulus (E)= $2.1 \times 10^5$  N/m<sup>2</sup> and Poisson’s ratio =0.3 and the results are compared with results given in the reference[1] that was obtained by Ghavami . The compared results are shown in Table 3. From this table it can be concluded that the deviation from that of the reference values [1] are less. Thereby the FE analysis and models are validated. A sample of mode shape obtained for P1R model is shown in Fig.4



Fig. 4: Buckling mode shape for P1R model

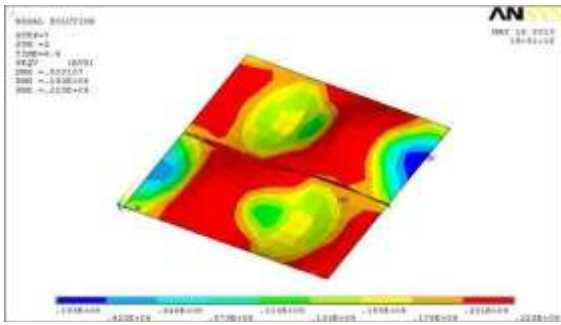


Fig. 5: Stress contour diagram for P1R model

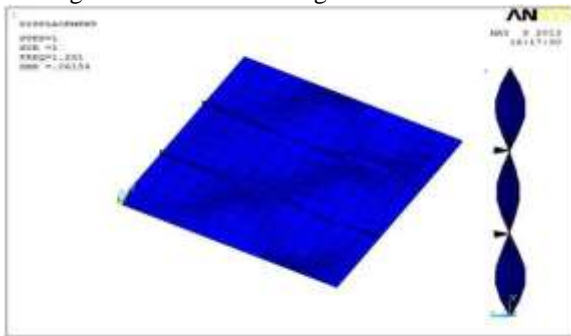


Fig. 6: Buckling mode shape for P2R model

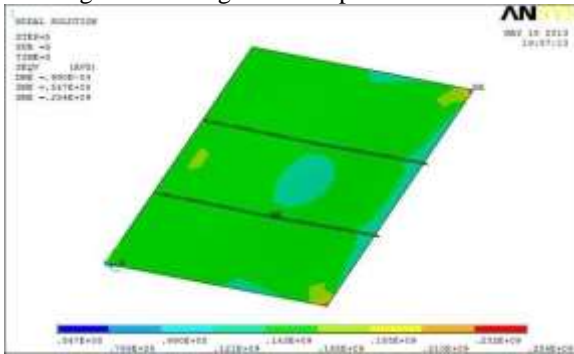


Fig. 7: Stress contour diagram for P2R model

A. Plate Thickness Variation

Plate Thickness(m)	BUCKLING STRENGTH (Mpa)	
	PIR	P2R
0.004	150.36	151.4
0.0042	155.65	157.6
0.0044	161.57	163.5
0.0046	168.46	169.9
0.0048	178.55	182.4

Table 6: Plate thickness variation

From the Table no 6, the value it is evident that as the thickness of plate increases the critical buckling strength also increases. The increase in shell thickness from 0.004m to 0.0048m as the increase in plate strength is 15.18% for P1R and 17.006% for P2R with respect to strength value.

STIFFENER Thickness (m)	BUCKLING STRENGTH (Mpa)	
	PIR	P2R
0.005	157.7	162.5
0.0055	158.5	169.2
0.006	159.4	175.9
0.0065	160.5	182.7
0.007	161.6	183.3

Table 7: Stiffener Thickness Variation

From the Table.7 it is evident that as the thickness of stiffener increases the critical buckling strength also

increases. The increase in stiffener thickness from 0.005m to 0.007m as the increase in plate strength is 2.407% for P1R and 12.295% for P2R with respect to strength value.

STIFFENER HEIGHT (m)	BUCKLING STRENGTH (Mpa)	
	PIR	P2R
0.028	161.1	172.1
0.0285	161.2	178.2
0.029	161.3	191.3
0.0295	161.5	197.3
0.030	161.6	203.8
0.0305	161.7	210.6
0.031	161.8	211.4

Table 8: Stiffener Height variation

From the Table8.

it is evident that as the thickness of stiffener increases the critical buckling strength also increases. The increase in stiffener height from 0.028m to 0.031m as the increase in stiffened plate strength is 0.4194% for P1R and 18.57% improvement for P2R with respect to strength value.

V. CONCLUSIONS

From the present analysis carried out on the stiffened plate taken for study, the following conclusions are derived.

- 1) When the plate thickness increases the buckling strength will also increases. Compare to P1R model the % of improvement for P2R model is high.
- 2) When the stiffener thickness increases the buckling strength will also increases. But the % of buckling strength for P1R model is low compared with P2R model.
- 3) When the stiffener height increases the buckling strength will increases. The stiffener height variation is not much effective on P1R model compared with P2R model.
- 4) When the location of the stiffener increases the buckling strength will decreases for P2 R model.

REFERENCES

- [1] Ghavami.K, Experimental study of stiffened plates in compression upto collapse, journal of constructional steel research 1994; vol.28, pp 197-221.
- [2] Taysi.N, Determination of thickness and stiffener locations for optimization of critical buckling load of stiffened plates, journal of scientific research and essays 2010; Vol.5(9), 897- 910.
- [3] Grondin, G.Y., Chen Q., Elwi, A.E and Cheng, J.J.R. Buckling of stiffened steel plates; a parametric study 1999; Vol.50, no.2, pp.151-175.
- [4] Chi Lui Emily Wang, Grondin G.Y and Ala. Alwi, Interaction buckling failure of stiffened steel plates 2006; Structural engineering. Report.264.
- [5] Bedair OK, Influence of stiffener location on the stability of stiffened plates under compression and uniaxial bending. Int. J.Mech. Sci 1997; 39: 33-49.
- [6] Brubak L, Hellesland J, Steen E. Semi-analytical buckling strength analysis of plates with arbitrary stiffener arrangements. J.Constr. Steel Res 2007; 63: 532-543.

- [7] Chajes A Principles of structural stability theory. Englewood Cliffs N.J. Prentice-Hall.1974.
- [8] Haftka RT, Adelman HM, Recent development in structural sensitivity Analysis. Structural Optimization, 1989; 1: 137-151.
- [9] Iuspa L, Ruocco E (2008). Optimum topological design of simply supported composite stiffened panles via genetic algorithm.Computers and Structures 2008; 86: 1 718-1737.
- [10] Kumar SYV, Mukhopadhyay M, A new finite element for buckling analysis of laminated stiffened plates. Composite Structures 1999; 46: 321-331.
- [11] Liu YG, Pavlovic MN, Elastic stability of flat rectangular plates under patch compression. Int. J. Mech. Sci 2007; 49: 970982.
- [12] Özakça M, Analysis and Optimal Design of Structures with Adaptivity. Ph. D. thesis, Department of Civil Engineering University College of Swansea, U.K 1993.
- [13] Özakça M, Murphy A, Veen SVD. Buckling and post-buckling of sub-stiffened or locally tailored aluminum panels. 25th International Congress of the Aeronautical Sciences 2006.
- [14] Experimental behavior and crack pattern of Rc beams strengthened by FRP by Adil Abass Lone parishodh journalsvolume 9 issue 2 February2020. Email: aadilabassi@tju.edu.cn
- [15] Observing complex joint hubs of load-bearing structures of the buildings by Adil Abass Lone published in International Research Journal of Modernization in Engineering Technology & Science (IRJMETS) – Volume 4 Issue 7, July 2022. Email: aadilabassi@tju.edu.cn

