

Solar Power Parameter-Measuring System by Using Arduino

Monali K. Kumbhare¹ Prashant P. Rane² Girish C. Hattewar³ Ashwini F. Kokate⁴

^{1,2,3}Student ⁴Assistant Professor

^{1,2,3,4}Department of Electrical Engineering

^{1,2,3,4}MPCE Bhilewada, Bhandara, India

Abstract— Accurate monitoring and measurement of solar photovoltaic panel parameters are important for solar energy plant analysis to gauge the performance and predict the longer term energy generation. There are always challenges of getting such data readily available thanks to huge amount of cash to be spent on state of the art equipment or the acquisition of reliable satellite weather data. This study aimed toward the event of an economical parameter-measuring system for a solar photovoltaic panel using Arduino microprocessor board. The systems measure five parameters, including voltage, current, candlepower, temperature, and pressure. The hardware circuit was designed to link different sensors with the Arduino board and therefore the measured data were successively were documented into a computer for further analysis. The accuracy of the constructed device was ascertained by comparing the measured parameters thereupon of conventional standard measuring instruments which shows good agreement. The measured parameters show that the output energy generation from solar photovoltaic panel largely depends on the solar irradiance and temperature.

Keywords: Solar Photovoltaic, Measurement System, Light Intensity, Temperature, Pressure, Voltage, Current

I. INTRODUCTION

The rising costs of fossil fuels, global warming, and severe weather conditions have compelled many nations to look into alternative sources of energy to reduce reliance on fossil-based fuels. The solar energy is one of the most promising renewable sources of energy currently being used globally for meeting rising demands of electric power (Kannan and Vakeesan, 2016; Kabir et al., 2018). Solar energy is considered as fastest growing renewable energy source for electricity generation after the wind energy (Adib et al., 2015). It involves conversion of solar energy into electric and/or heat energies. The sunlight is collected either directly by using photo voltaics cells or indirectly using concentrated solar energy (Singh, 2013). The solar photovoltaic (PV) energy system directly converts the sun photons energy to electricity through the solar cells. Solar cells are made from light sensitive semiconductors that use photon energy to dislodge electrons to drive an electric current. The two broad classifications of photovoltaic modules are the mono-crystalline and poly-crystalline. Polycrystalline solar cells are formed from multiple silicon crystals while mono-crystalline solar cells are made from a single silicon crystal and they usually have higher efficiency (Yamaguchi, 2003). The output of power generated from a solar cell largely depends on weather conditions most especially the solar irradiance and air temperature (Osueke et al., 2013; Ibrahim et al 2015). The recent development in energy sector have shown that solar-energy market is one of the most rapidly expanding renewable energy markets in the world (Adib et al., 2015). Presently there is significant increasing in demands for remote monitoring and control equipment for solar-energy

applications. The advancement in the solar cell technology has led to the development of a more efficient, flexible and lighter PV cells named smart solar cells (Luque and Hegedus, 2011; Battersby, 2019). Solar manufacturing company now embeds electronics such as power optimizers, micro DC-to-DC converters, and condition monitoring devices in the solar PV modules. The monitoring and measurement of solar PV parameters and site condition has some importance in evaluating the performance of existing solar installations, advanced system monitoring and the prediction of future generation (Diagne et al., 2013; Shamim et al., 2015; Verbois et al., 2018; Ghasempour et al., 2019). They also aid in decision making, product development, system maintenance, and many other applications. A solar PV energy system requires reliable means of data acquisition of all the electrical and meteorological data for condition monitoring, and evaluation of the system performance. Acquiring such data has been capital intensive when state of the art equipment is to be installed at the site and there is a concern of reliability over the use of satellite data in place of site data. This study involves the development of low-cost Arduino-based solar photovoltaic parameter measuring system with data logger. The developed system successfully measures the solar photovoltaic parameters such as incident light intensity, voltage, current, and temperature.

II. METHODOLOGY

In this work, an Arduino-based solar parameter-measuring system was designed and constructed using Arduino Uno and multiple sensors. The system was found to be capable of measuring different solar PV parameters including the voltage, current, real time temperature, real time atmospheric pressure, and light intensity. The measured parameters were simultaneously logged into a personal computer (PC) for future analysis or references. Figure 1 shows the block diagram of an Arduino based solar PV parameter-measuring system having sensors interfaced between the solar panel and Arduino board. The system comprised of both hardware circuit design and software programming for interfacing solar with the Arduino board. The hardware development involves the design of electronic components for the sensors interface between the solar panel to the Arduino UNO. The hardware unit comprised of the voltage sensor, current sensor, light dependent resistor (LDR) sensor, pressure-temperature sensor and the Arduino Uno. The acquired data from sensors are analogue, thus the conversion to digital equivalent was performed within the Arduino UNO analogue-to-digital converter module programmed in C- language.

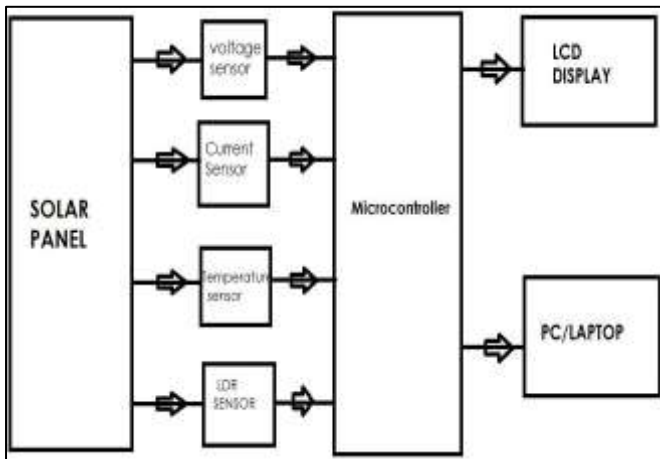


Fig. 1: Solar PV parameter-measuring system

III. SYSTEM COMPONENTS

A. Solar Panel

A solar photovoltaic panel converts sunlight (photons) into electrical energy through the influence of the photovoltaic effect. The photovoltaic modules constitute the photovoltaic array of a photovoltaic system that generates and supplies electric energy from solar energy in commercial quantities for community uses. The common types of photovoltaic modules are mono-crystalline, poly-crystalline, and thin film photovoltaic modules.



Fig. 2: Solar Panel

B. Arduino Microcontroller

Arduino is an open-source, prototyping platform that is widely used in digital world owing to simplicity and ease of configuration. The Arduino UNO R3 used in this project is a microcontroller board based on the ATmega328. The microcontroller is shown in Figure 2, it has 16 MHz crystal oscillator, 14 digital input/output pins of which 6 can be used as PWM outputs. It has 6 analog inputs, a USB connection function as power source and communication channel, a power jack, an ICSP header, and a reset button.

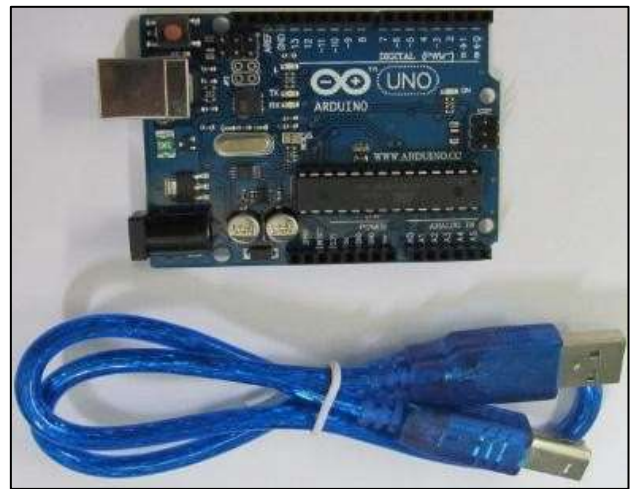


Fig. 3: ARDUINO Microcontroller

C. Light Dependent Resistor (LDR)

The Light Dependent Resistor (LDR) is a light-controlled variable resistor. Its resistance depends on the light impinging on it. The resistance offered by the LDR is inversely proportional to light strength. Light dependent resistors are useful especially in light/dark sensor circuits application. The symbol is shown in Figure 3, they usually have high resistance up to 1MΩ, but when they are illuminated with light, the resistance drops drastically. In this work, the LDR sensor is used to monitor the light intensity incidence on the solar PV. The change in resistance can easily be measured by converting the resistance into voltage equivalent. The input of the LDR is connected to a 5V supply and in series with a 10KΩ resistor. The middle point is used as output connected to the Arduino board. When light falls on the LDR, the resistance of LDR decreases and the analog voltage changes. This voltage is applied to the analog input of the Arduino which is converted to digital equivalent corresponding to light intensity. For measuring the light intensity in degree lux, the LDR voltage (VLDR) is converted using equation.

$$\text{Light Intensity} = \frac{V_{LDR} \times 102.3}{5}$$

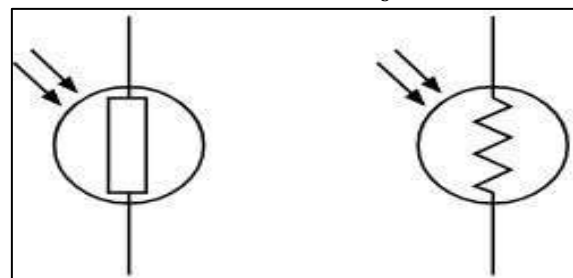


Fig. 4: The Light Dependent Resistor (LDR)

D. Temperature and Pressure Sensor

The temperature and barometric pressure were measured using BMP180 temperature-pressure sensor. The BMP180 sensor is an environmental sensor for different weather sensing and can be used with both I2C (inter-integrated circuit) and SPI (serial peripheral interface) communication protocol. This precision sensor from BOSCH company is a popular low-cost precision sensing solution for measuring barometric pressure with ±1 hPa absolute accuracy, and at temperature ±1.0°C accuracy. Figure 4 show the BMP180

sensor with the connection pins for interface with the Arduino board.

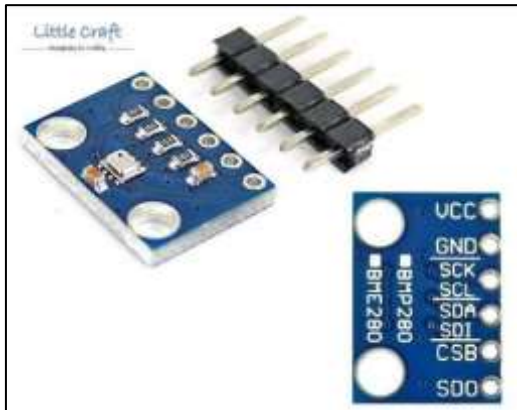


Fig. 5: BMP 180 temperature-pressure sensor

IV. SOFTWARE

This section presents the programming of the Arduino board and highlights the software relevance in the system operation. Some of the sensors such as temperature and LDR sensor output are in analog format which the conversion to digital equivalent was done using the analog-to-digital converter (ADC) module of the microcontroller. The Arduino UNO was programmed using the Code Blocks Arduino IDE (integrated development environment) which is an open source customized software for Arduino development. The microcontroller was interfaced to the PC with using universal serial bus (USB) cable. The Arduino board ADC monitors the analogue input voltage changes and converts it to a binary number between 0 to 1023 bit. In between, analog Read (pin no) returns a number between 0 and 1023 proportional to the amount of voltage being applied to the pin. The flow chart in Figure7 shows the analogue to digital conversion process and how the measured data were display on LCD screen and log to the PC.

V. TESTING

The designed circuit parameters were first simulated on PROTEUS ISIS software which was in turn was used to select components for the construction of the Arduino-based solar PV parameter-measuring system. The system construction encompasses mounting and soldering of the circuit elements on the breadboard. The hardware construction involves the coupling of physical part of the system which is made up of circuit units and interface between the voltage sensor unit, current sensor unit, temperature and pressure sensor unit, light intensity sensor unit and the Arduino microcontroller unit. The second stage involves programming of the Arduino in C-language which provides central control for the system operation. The program used for the system testing on the PROTEUS ISIS software was downloaded to the board to complete the circuit construction.

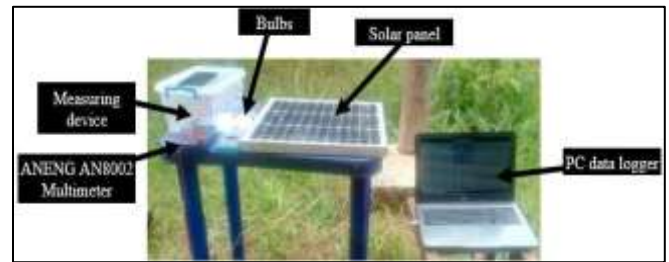


Fig. 6: Field testing of measuring system

After the circuit construction, the measuring system was tested with a mono-crystalline 20W solar panel and 10W DC bulb as load. The test was conducted outdoor for few days and the values of the voltage, current, light intensity, temperature and pressure were all logged into a computer. To confirm the accuracy of the constructed measuring device, a comparative measurement was also taken by using standard multimeter (ANENG AN8002) for current and voltage measurement and also the temperature measurement using the multimeter since it has thermocouple probe. The constructed measurement values and that of the standard instrument shows good similarity. The field experimental setup is shown in Figure 6 together with the PC for data logging. The testing was conducted on the 19th, 20th, 21st of June 2019 at University of Ilorin, Faculty of Engineering and Technology. The readings were taken from 7:00am to 6:00pm daily for each of the testing days. The solar PV panel was placed in horizontal positions throughout the three days test period in which the readings were logged to PC. It was well positioned to ensure that the solar panel was not affected by shading and surface was kept clean at all times to avoid errors in the readings. The results for voltage, current, light intensity, temperate and pressure were presented. The results were recorded on the 19th, 20th and 21st of June, 2019 between 7:00am to 6:00pm daily.

VI. RESULTS AND DISCUSSION

A. Voltage and Light Intensity Measurement

The results of voltage and light intensity against the hours of the day for the solar PV panel are presented in Figures 7, 8 and 9, respectively. The highest voltage for 19th of June, 2019 was 17.44V at 3.00pm with light intensity of 1014.5lux and the lowest voltage was 9.21V at 7.00am with light intensity of 990.5lux. The highest voltage for 20th of June, 2019 was 13.79V at 12.00 noon with light intensity 1010.25lux and the lowest voltage was 9.28V at 7.00am with light intensity 1000lux. The highest voltage for 21st of June, 2019 was 18.54V at 12.00pm with light intensity 1016lux and the lowest voltage was 10.16V at 7.00am with light intensity of 1000.5lux. As observed from the graphs, there is direct relationship between the light intensity and the solar panel output voltage.

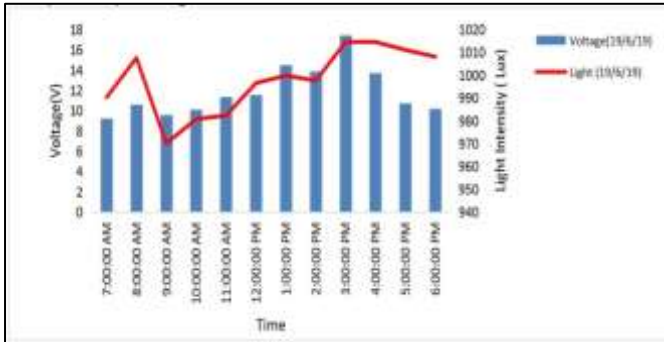


Fig. 7: Graph of voltage and light intensity against time for day 1.

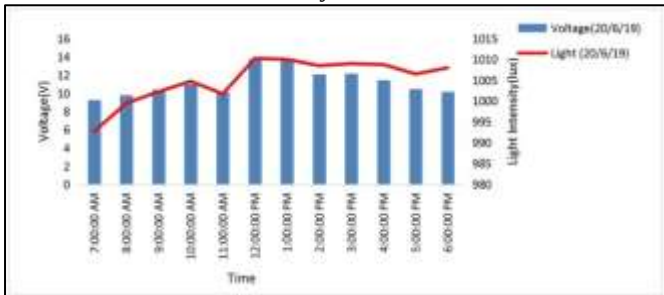


Fig. 8: Graph of voltage and light intensity against time for day 2.

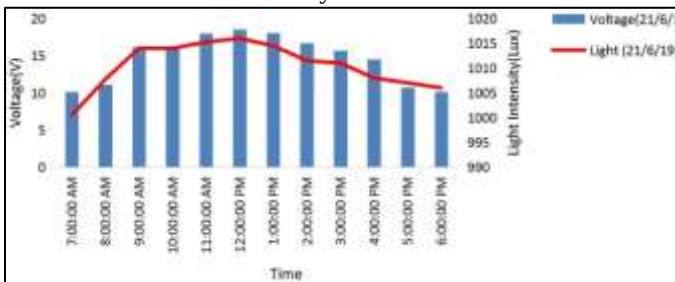


Fig. 9: Graph of voltage and light intensity against time for day 3.

Figure 10 presented a comparison of light intensity for the three days, from the bar chart shows that highest light intensity of 1016lux was recorded at 12.00 pm on the 21st of June while the lowest light intensity was 960.75 lux at 10am on the 19th of June 2019.

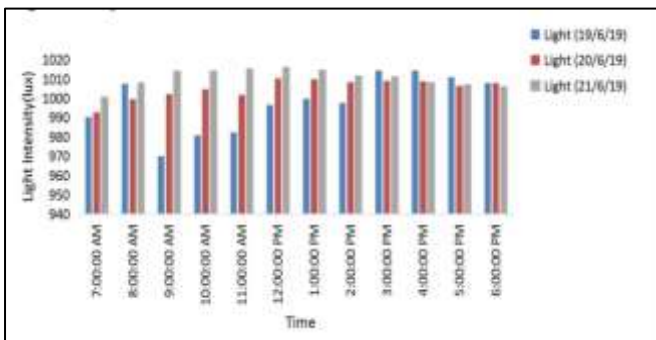


Fig. 10: Graph of light intensity against time

B. Temperature and Pressure Measurement

The three days result of the ambient temperature and pressure around the solar PV panel are presented in Figures 11, 12 and 13. The highest pressure and temperature recorded for 19th of June, 2019 were 976.09Pa and 32.71°C respectively at 3.00pm and the lowest pressure and temperature were 971.35 Pa and 23.9°C at 7am.

Pa and 23.89°C at 7.00am. The highest pressure and temperature for 20th of June, 2019 were 976.96Pa, 30.91°C respectively at 1.00pm and lowest pressure and temperature were 971.37 Pa and 24.19°C at 6.00pm. The highest pressure and temperature for 21st of June, 2019 were 975.97Pa, 33.41°C at 11.00am. The lowest recorded pressure and temperature for the day were 971.35 Pa and 23.9°C at 7am. It can be seen from the pressure- temperature graphs that the air pressure is directly proportional to the air temperature.

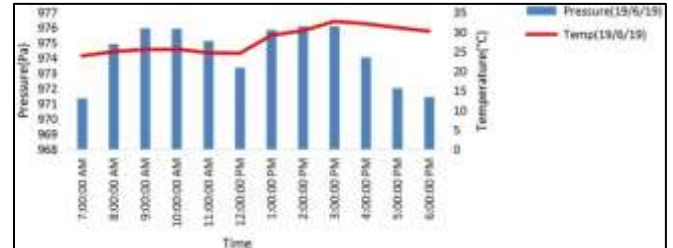


Fig. 11: Pressure and temperature against time day 1

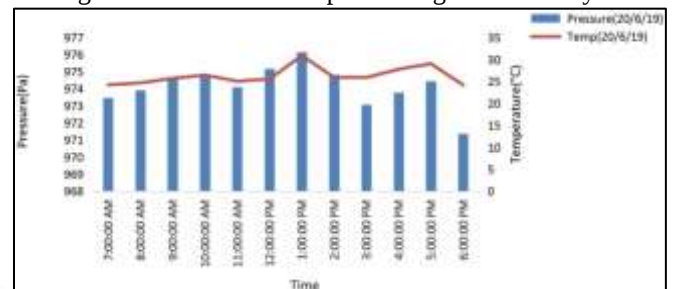


Fig. 12: Pressure and temperature against time day 2

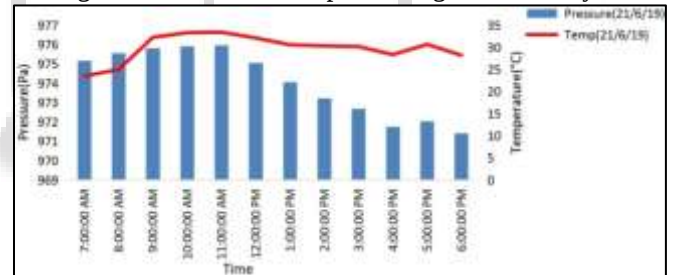


Fig. 13: Pressure and temperature against time for day 3

C. Solar PV Panel Output Power

The result of the power generated by the solar panel is shown in Figure 14. The result pattern shows that the output power depends directly on the solar panel voltage, light intensity and the temperature. The solar panel highest power of 7.5W was recorded on the 21st of June when the day was brightest with moderately low temperature of 33.31°C at 11.00pm while the lowest power was 0.48W at 7.00am on the 19th of June 2019.

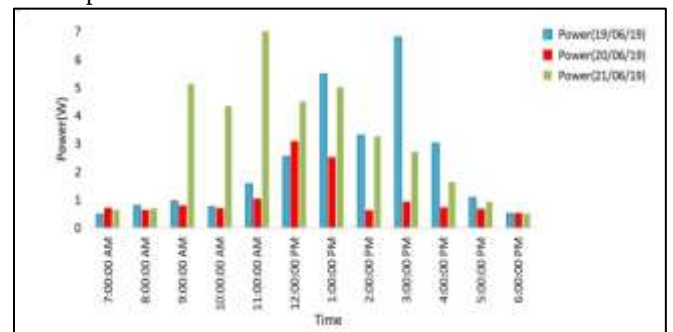


Fig. 14: Solar panel output power against time.

VII. CONCLUSION

An Arduino based solar power parameter-measuring system has been designed and constructed using the optimized simulated parameter from Proteus ISIS. This device was then used to acquire solar PV current, voltage, power, temperature, pressure and light intensity. The system can measure data from solar panel that can be used to evaluate the performance of solar energy generated for future energy generation prediction. Based on the measurement data, it was observed that the solar PV energy generation directly depends on the solar irradiance, temperature and air pressure.

REFERENCES

- [1] Adib, R., Murdock, H., Appavou, F., Brown, A., Epp, B., Leidreiter, A., Lins, C., Murdock, H., Musolino, E. and Petrichenko, K. 2015. Renewables 2015 global status report. REN21 Secretariat, Paris, France: 162.
- [2] Ashish A, 2018. Using an LDR Sensor With Arduino. Available online at <https://maker.pro/arduino/projects/using-an-ldr-sensor-with-arduino>.
- [3] Battersby, S., 2019. News Feature: The solar cell of the future. Proceedings of the National Academy of Sciences, USA, 116:7-10.
- [4] BlueSolar- Monocrystalline- Panels-Datasheet. Available at <https://cdn.shopify.com/s/files/1/0017/8847/7489/files/Victron-BlueSolar-Monocrystalline-Panels-Datasheet.pdf?1506>.
- [5] Diagne, M., David, M., Lauret, P., Boland, J. and Schmutz, N. 2013. Review of solar irradiance forecasting methods and a proposition for small-scale insular grids. Renewable and Sustainable Energy Reviews, 27:65-76.
- [6] Ghasempour, R., Nazari, MA., Ebrahimi, M., Ahmadi, MH. and Hadiyanto, H. 2019. Multi-Criteria Decision Making (MCDM) Approach for Selecting Solar Plants Site and Technology: A Review. International Journal of Renewable Energy Development, 8(1): 15-25.
- [7] Oladimejietal:DesignandConstructionofanArduino-BasedSolarPowerParameter-MeasuringSystemwithData Logger.AZOJETE,16(2):255-268.ISSN1596-2490;e-ISSN2545-5818,www.azojete.com.ng
- [8] Ibrahim, O., Yahaya, NZ., Saad, N. and Umar, MW. 2015. Matlab/Simulink model of solar PV array with perturb and observe MPPT for maximising PV array efficiency. 2015 IEEE Conference on Energy Conversion (CENCON), Johor Bahru Malaysia, 2015: 254-258.
- [9] Kabir, E., Kumar, P., Kumar, S., Adelodun, AA. and Kim, KH. 2018. Solar energy: Potential and future prospects. Renewable and Sustainable Energy Reviews, 82:894-900.
- [10] Kannan, N. and Vakeesan, D. 2016. Solar energy for future world:-A review. Renewable and Sustainable Energy Reviews, 62: 1092-1105.
- [11] Luque, A. and Hegedus, S. 2011. Handbook of photovoltaic science and engineering. John Wiley & Sons, : 1-38, New York City, United States.
- [12] Osueke, C., Uzendu, P. and Ogbonna, I. 2013. Study and evaluation of solar energy variation in Nigeria.

International Journal of Emerging Technology and Advanced Engineering, 3: 501-505.

- [13] Ravi, 2018. Interfacing ACS712 Current Sensor with Arduino – Measure Current with Arduino: Available online at <https://www.electronicshub.org/interfacing-ac712-current-sensor-with-arduino>.