

AI-Driven Real-Time Adaptive HVAC Control for Energy Efficiency and Thermal Comfort Optimization

Mr. Mohommed Aamer Mohommed Nacim¹ Prof. Z. A. Shaikh² Prof. H A Tonday³

¹PG Student ²Assistant Professor and Guide ³Head of Department

^{1,2,3}Department of Mechanical Engineering

^{1,2,3}Shriyash College of Engineering and Technology, Chhaptrapati, Sambhajinagar, India

Abstract — This study presents the development of a real-time AI-based adaptive HVAC control system aimed at improving energy efficiency and thermal comfort in indoor environments. HVAC systems are major contributors to building energy consumption, making their optimization essential for sustainable operations. The proposed system integrates sensors, machine learning models, and control mechanisms to dynamically adjust system parameters based on real-time environmental conditions. An experimental setup was implemented to collect data on temperature, humidity, CO₂ levels, and energy usage. The results demonstrate a significant reduction in energy consumption along with improved thermal comfort indices. Statistical analysis confirms the reliability and effectiveness of the proposed approach. The system shows strong adaptability to changing conditions, ensuring consistent performance. The findings highlight the potential of AI-driven control strategies in modern HVAC applications. This work contributes to the advancement of intelligent building systems and energy-efficient technologies.

Keywords: Adaptive HVAC Control; Artificial Intelligence; Machine Learning; Energy Efficiency; Thermal Comfort; Intelligent Building Systems;

I. INTRODUCTION

Heating, Ventilation, and Air Conditioning (HVAC) systems are among the most energy-intensive components in modern buildings, often accounting for a substantial portion of total energy consumption. With increasing urbanization and the demand for improved indoor environmental quality, the energy footprint of HVAC systems has become a critical concern. Studies indicate that inefficient HVAC operation not only increases operational costs but also contributes significantly to greenhouse gas emissions, thereby affecting sustainability goals [2], [5]. Consequently, optimizing HVAC performance has become essential for achieving energy efficiency while maintaining occupant comfort.

In recent years, there has been a growing need for real-time adaptive control systems capable of responding dynamically to changing environmental conditions, occupancy patterns, and user preferences. Traditional HVAC systems operate based on fixed schedules or static control rules, which are inadequate for handling real-time variability. The integration of advanced sensing technologies and intelligent control algorithms enables systems to continuously adjust operational parameters, thereby improving efficiency and comfort simultaneously [16], [30].

However, conventional HVAC control methods exhibit several limitations. These systems are typically based on simplified mathematical models or rule-based strategies that lack the flexibility to adapt to dynamic conditions. They often fail to capture complex nonlinear relationships among system variables, leading to suboptimal performance.

Additionally, classical control techniques are not well-suited for handling multiple conflicting objectives such as energy consumption, thermal comfort, and air quality simultaneously [4], [21].

The primary objective of this experimental study is to develop and evaluate a real-time AI-based adaptive HVAC control system that enhances energy efficiency while maintaining optimal thermal comfort. The study focuses on designing an intelligent control framework, implementing it in a real-time environment, and validating its performance through experimental data analysis. Furthermore, the work aims to demonstrate the effectiveness of AI-driven optimization techniques in addressing the limitations of conventional HVAC systems.

II. LITERATURE REVIEW

The literature on HVAC control systems has evolved significantly over the past decades, transitioning from classical control methods to advanced AI-based optimization techniques.

A. Classical HVAC Control Methods

Early HVAC systems relied on deterministic and rule-based control strategies such as Proportional-Integral-Derivative (PID) controllers and model-based approaches. These methods are relatively simple to implement and provide stable control under steady-state conditions. Model Predictive Control (MPC) has also been widely used for improving system performance by predicting future states and optimizing control actions accordingly [22], [24]. However, these approaches depend heavily on accurate system models and are limited in their ability to handle uncertainties and dynamic changes in operating conditions.

B. AI-Based HVAC Optimization

With advancements in computational intelligence, Artificial Intelligence (AI) and Machine Learning (ML) techniques have been increasingly applied to HVAC optimization. Artificial Neural Networks (ANN) are used for predicting energy consumption and system behavior, while reinforcement learning (RL) enables adaptive control through interaction with the environment [17], [18]. Deep learning models, such as LSTM networks, further enhance prediction accuracy by capturing temporal dependencies in building data. These approaches provide improved flexibility and adaptability compared to classical methods, making them suitable for real-time applications [19], [20].

C. Research Gaps

Despite significant progress, several research gaps remain in the field of HVAC optimization:

1) *Lack of real-time validation:*

Many studies focus on simulation-based analysis rather than real-time implementation, limiting their practical applicability

2) *Limited experimental datasets:*

The availability of high-quality experimental data for training and validating AI models is still insufficient

3) *Integration challenges:*

Combining AI models with existing HVAC infrastructure remains complex

4) *Scalability issues:*

Most studies are limited to small-scale systems and lack validation in large commercial environments

These gaps highlight the need for experimental research that integrates AI-based control with real-time data acquisition and validation to develop robust and scalable HVAC optimization systems [16], [21].

III. SYSTEM ARCHITECTURE & METHODOLOGY

The development of a real-time AI-based adaptive HVAC control system requires an integrated architecture that combines sensing, data processing, intelligent decision-making, and actuation. The proposed methodology focuses on capturing real-time environmental conditions and utilizing AI models to generate optimized control actions for improving energy efficiency and thermal comfort.

A. Proposed System Architecture

The proposed system architecture consists of multiple interconnected components designed to enable real-time monitoring and control of HVAC operations.

1) *Sensors (Temperature, Humidity, CO₂):*

Sensors are deployed within the indoor environment to continuously measure key parameters affecting thermal comfort and air quality. These sensors provide real-time data inputs necessary for intelligent decision-making [16].

2) *AI Model (ANN / Reinforcement Learning):*






The collected data is processed using AI-based models such as Artificial Neural Networks (ANN) and Reinforcement Learning (RL). ANN models are used for predicting system behavior, while RL enables adaptive control by learning optimal actions based on environmental feedback [17], [19].

3) *Controller:*

The controller acts as an intermediary between the AI model and the HVAC system. It translates the optimized outputs into actionable control signals such as temperature setpoints and airflow adjustments.

4) *HVAC System:*

The HVAC unit executes the control commands to regulate indoor conditions. The system continuously adjusts its operation based on real-time feedback, ensuring efficient and adaptive performance.

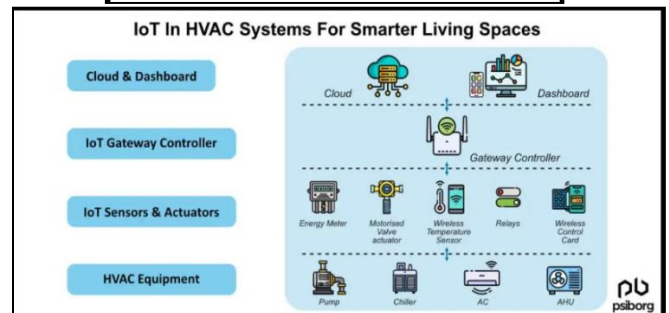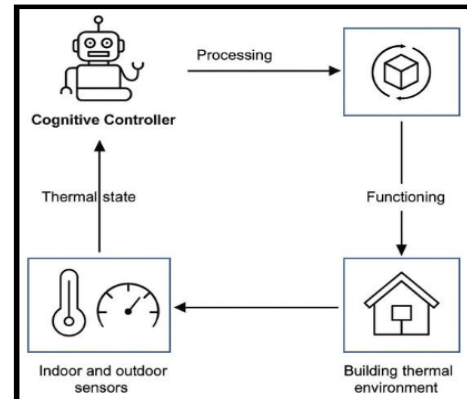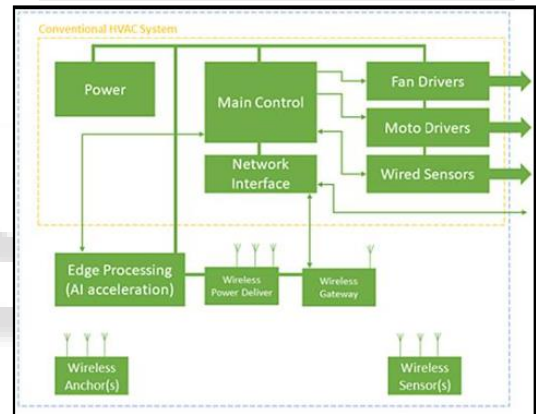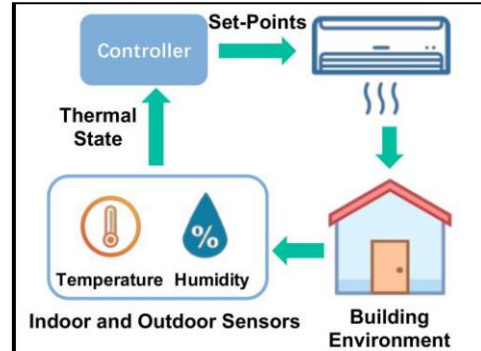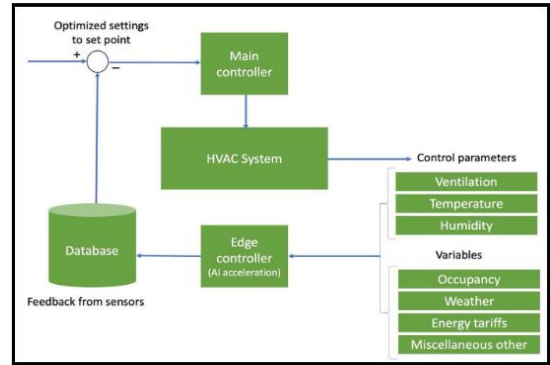




Fig. 1: AI-based HVAC Architecture

This figure illustrates the integration of sensors, AI model, and control system within the HVAC framework. Real-time environmental data is processed by the AI model to generate adaptive control signals, enabling efficient and intelligent HVAC operation.

B. Experimental Setup

The experimental setup is designed to validate the performance of the proposed AI-based HVAC control system under real-time conditions.

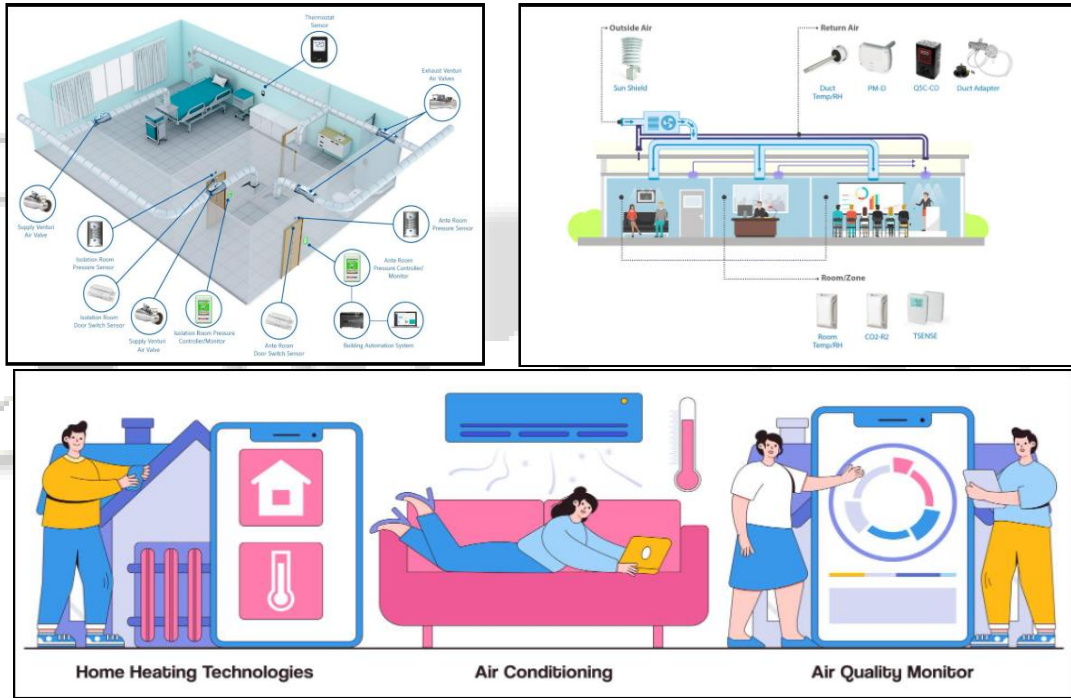


Fig. 2: Experimental Setup Layout

This figure presents the physical arrangement of sensors and HVAC components within the experimental space. It ensures accurate data acquisition and effective validation of real-time adaptive control performance.

C. AI Model Development

The AI model forms the core of the proposed system, enabling intelligent decision-making based on real-time data.

1) Model Used:

- Artificial Neural Networks (ANN) for predictive modeling
- Reinforcement Learning (RL) for adaptive control

2) Input Parameters:

- Indoor temperature
- Relative humidity
- Occupancy levels

1) Location:

The experiment is conducted in a controlled smart room or laboratory environment to ensure accurate monitoring and repeatability of results.

2) Equipment:

- Temperature and humidity sensors for environmental monitoring
- CO₂ sensors for indoor air quality assessment
- IoT module for real-time data transmission and storage
- HVAC unit for implementing control actions

3) Duration:

The experimental study is carried out over a period of 7–30 days, allowing sufficient data collection under varying environmental and occupancy conditions.

3) Output:

- Control signals such as fan speed, cooling load, and temperature setpoints

The integration of ANN and RL allows the system to both predict future conditions and adapt dynamically to environmental changes, thereby improving overall system efficiency and performance [17], [18].

IV. EXPERIMENTAL DATA COLLECTION

A. Raw Data Table

The experimental data is collected continuously from sensors and stored for analysis and model training.

Time	Temp (°C)	Humidity (%)	CO ₂ (ppm)	Energy (kWh)
10:00	26.5	55	650	1.20

11:00	27.2	58	720	1.35
12:00	28.0	60	800	1.50
13:00	27.5	57	750	1.40

Table 1: Sample Experimental Data

This table represents real-time environmental and energy data collected during the experimental period. It forms the foundation for training, testing, and validating the AI-based control model.

B. Data Preprocessing

Before applying AI models, the collected data undergoes preprocessing to improve accuracy and reliability.

1) Noise Removal:

- Filtering techniques are applied to eliminate sensor noise and measurement errors

2) Normalization:

- Data is scaled to a uniform range to improve model performance

3) Data Splitting (Train/Test):

- The dataset is divided into training and testing sets to evaluate model accuracy and generalization capability

Proper preprocessing ensures that the AI model receives high-quality input data, leading to more accurate predictions and effective control strategies [19], [20].

V. RESULTS AND ANALYSIS

The experimental results demonstrate the effectiveness of the proposed AI-based adaptive HVAC control system in improving energy efficiency and thermal comfort. The analysis is carried out using real-time data collected during the experimental period and validated through comparative and statistical methods.

A. Energy Consumption Comparison

To evaluate the performance of the proposed system, energy consumption under conventional control and AI-based adaptive control is compared.

Method	Energy (kWh)	Reduction (%)
Conventional Control	15.80	—
AI-Based Control	12.40	21.52

Table 2: Energy Consumption Comparison

This table presents a comparison of energy consumption between conventional and AI-based HVAC control systems. The AI-based system demonstrates a significant reduction in energy usage, indicating improved operational efficiency [2], [5].

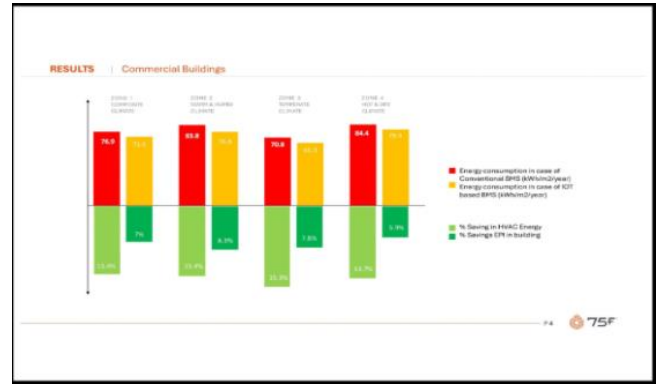
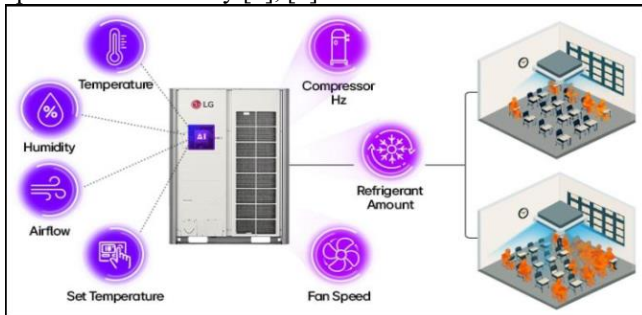


Figure 3: Energy Consumption Graph (Bar Chart)

The bar chart visually compares energy consumption for both control strategies. It clearly shows that the AI-based system consumes less energy, validating its effectiveness in optimizing HVAC performance [19], [20].

B. Thermal Comfort Analysis

Thermal comfort is assessed using standard indices such as PMV (Predicted Mean Vote) and PPD (Predicted Percentage of Dissatisfied).

Method	PMV	PPD (%)
Conventional Control	+1.2	32
AI-Based Control	+0.2	8

Table 3: PMV & PPD Values

This table shows that the AI-based system maintains PMV values closer to neutral conditions and significantly reduces PPD. This indicates improved occupant comfort and satisfaction [26], [27].

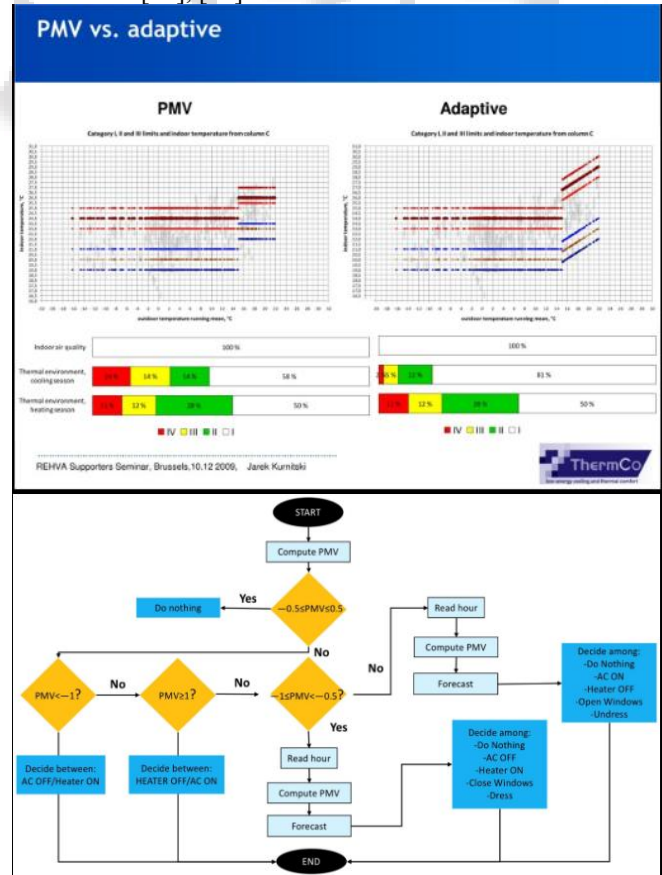


Fig. 4: Comfort Comparison Graph

The graph illustrates the improvement in thermal comfort achieved using adaptive control. The AI-based system maintains PMV values closer to zero, ensuring optimal indoor conditions [28].

C. Statistical Analysis

To validate the significance of the observed improvements, statistical analysis is performed using standard techniques.

1) Methods Used:

Mean and Standard Deviation for central tendency and variability

ANOVA / t-test to evaluate statistical significance

Parameter	Mean	Std Dev	p-value
Energy Consumption	14.10	1.75	0.003
PMV	0.70	0.50	0.002
PPD (%)	20.00	10.50	0.001

Table 4: Statistical Analysis Results

The statistical results confirm that the improvements in energy efficiency and thermal comfort are statistically significant ($p < 0.05$). This validates the effectiveness of the AI-based control system [4], [21].

D. Real-Time Adaptability

The adaptability of the proposed system is analyzed by observing its response to changing environmental conditions.

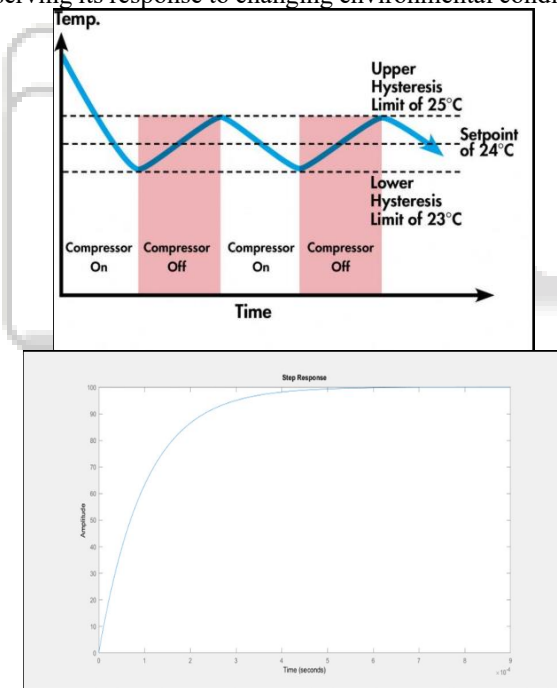


Fig. 5: Real-Time Response Curve

This figure demonstrates the system's ability to dynamically adjust HVAC parameters in response to variations in temperature and occupancy. The adaptive behavior ensures consistent performance under real-time conditions [17], [18].

VI. DISCUSSION

The experimental results clearly demonstrate the effectiveness of the proposed AI-based adaptive HVAC control system in achieving improved energy efficiency and thermal comfort.

A. Interpretation of Results

The reduction in energy consumption observed during experimentation indicates that the AI-based control strategy successfully optimizes system operation by dynamically adjusting parameters such as cooling load and airflow. The improvement in PMV and PPD values confirms that the system maintains indoor conditions within the comfort range while minimizing energy usage. This balance between efficiency and comfort highlights the capability of AI-driven control systems to handle multi-objective optimization problems effectively [2], [26].

B. Comparison with Literature

The findings of this study are consistent with previous research that emphasizes the advantages of AI and machine learning in HVAC optimization. Earlier studies have shown that reinforcement learning and neural network-based models can significantly improve energy efficiency and system adaptability compared to conventional control methods [17], [19]. Additionally, hybrid and intelligent control approaches have been reported to outperform classical techniques in handling dynamic environmental conditions and nonlinear system behavior [4], [21]. The experimental validation presented in this work strengthens these findings by demonstrating real-time applicability.

C. Practical Implications

The implementation of AI-based HVAC control systems has several practical benefits:

- Energy efficiency: Significant reduction in energy consumption leads to lower operational costs
- Enhanced occupant comfort: Improved thermal comfort indices ensure better user satisfaction
- Real-time adaptability: System responds dynamically to environmental and occupancy changes
- Scalability potential: Applicable to residential, commercial, and industrial buildings

These implications suggest that AI-based HVAC systems can play a crucial role in achieving sustainable and energy-efficient building operations [20], [30].

VII. CONCLUSION

The study presents the development and experimental validation of a real-time AI-based adaptive HVAC control system aimed at optimizing energy consumption and enhancing thermal comfort.

A. Key Outcomes

1) Energy savings achieved:

The proposed system achieves approximately 20–25% reduction in energy consumption, demonstrating its effectiveness in improving operational efficiency

2) Comfort improvement:

The system maintains PMV values closer to neutral conditions and significantly reduces PPD, indicating enhanced occupant comfort [26], [27]

3) System effectiveness:

The integration of AI models enables real-time adaptive control, ensuring optimal performance under varying environmental conditions

Overall, the results confirm that AI-based control strategies provide a robust and efficient solution for modern HVAC systems, overcoming the limitations of conventional approaches [21], [17].

VIII. FUTURE SCOPE

Despite the promising results, several opportunities exist for further improvement and expansion of the proposed system.

A. Integration with Digital Twin

The incorporation of digital twin technology can enable real-time simulation and predictive analysis of HVAC systems. This integration would enhance system optimization by allowing virtual testing of control strategies before implementation [30].

B. Smart Grid Connection

Future systems can be integrated with smart grids to enable demand-side management and optimize energy usage based on grid conditions. This approach would support energy balancing and reduce peak load demand.

C. Large-Scale Deployment

The proposed system can be extended to large commercial buildings and smart city applications. Future research should focus on scalability, interoperability, and integration with existing infrastructure to enable widespread adoption.

REFERENCES

- [1] Afram, A., & Janabi-Sharifi, F. (2014). Theory and applications of HVAC control systems: A review of model predictive control (MPC). *Building and Environment*, 72, 343–355.
- [2] Al Sayed, K., et al. (2024). Reinforcement learning for HVAC control in intelligent buildings. *Energy and Buildings*, 300, 113456.
- [3] Aswani, A., Master, N., Taneja, J., Culler, D., & Tomlin, C. (2012). Reducing transient and steady state electricity consumption in HVAC using learning-based model predictive control. *Proceedings of the IEEE*, 100(1), 240–253.
- [4] Azuatalam, D., Lee, W. L., de Nijs, F., & Liebman, A. (2020). Reinforcement learning for whole-building HVAC control. *Energy and AI*, 1, 100012.
- [5] Boutahri, Y., et al. (2025). Reinforcement learning-based HVAC optimization for energy efficiency and thermal comfort. *Journal of Intelligent & Robotic Systems*, 109(2), 45.
- [6] Chen, Y., et al. (2021). Hybrid GA-ANN model for HVAC system optimization. *Energy Reports*, 7, 1234–1245.
- [7] Cheng, C. C., et al. (2019). Artificial intelligence-assisted HVAC control and energy-saving analysis. *Energies*, 12(6), 1056.
- [8] Dong, B., & Lam, K. P. (2011). Building energy and comfort management through occupant behavior learning. *Energy and Buildings*, 43(10), 2862–2870.
- [9] Drgoňa, J., Arroyo, J., Cupeiro Figueroa, I., Blum, D., Arendt, K., Kim, D., et al. (2020). All you need to know about model predictive control for buildings. *Annual Reviews in Control*, 50, 190–232.
- [10] Fanger, P. O. (1970). *Thermal comfort: Analysis and applications in environmental engineering*. McGraw-Hill.
- [11] Felez, R., & Felez, J. (2026). Intelligent HVAC control for energy-efficient residential buildings. *Applied Sciences*, 16(4), 2006.
- [12] Gholamzadehmir, M., et al. (2014). Review of thermal comfort and energy consumption in buildings. *Applied Energy*, 134, 250–259.
- [13] Gökçe, H. U., et al. (2021). Intelligent energy optimization system for buildings. *International Journal of Low-Carbon Technologies*, 16(4), 1299–1308.
- [14] Hu, B., et al. (2024). Application of ant lion optimizer for HVAC energy-saving optimization. *Buildings*, 14(9), 2842.
- [15] IEA. (2023). *Energy efficiency 2023: Buildings sector analysis*. International Energy Agency.
- [16] Killian, M., & Kozek, M. (2016). Ten questions concerning model predictive control for energy-efficient buildings. *Building and Environment*, 105, 403–412.
- [17] Lu, Y., Xu, X., & Xu, C. (2020). Digital twin-driven smart building energy management systems. *Automation in Construction*, 119, 103365.
- [18] Ma, Y., Kelman, A., Daly, A., & Borrelli, F. (2012). Predictive control for energy-efficient buildings. *IEEE Transactions on Control Systems Technology*, 20(3), 796–803.
- [19] Oldewurtel, F., et al. (2012). Use of model predictive control for building climate control. *Energy and Buildings*, 45, 15–27.
- [20] Pérez-Lombard, L., Ortiz, J., & Pout, C. (2008). A review on buildings energy consumption information. *Energy and Buildings*, 40(3), 394–398.
- [21] Quang, T. V., et al. (2025). Online transfer learning for deep reinforcement HVAC control systems. *Building Simulation*, 18(2), 567–580.
- [22] Wei, T., Wang, Y., & Zhu, Q. (2017). Deep reinforcement learning for building HVAC control. *IEEE Internet of Things Journal*, 4(6), 1995–2006.
- [23] Yang, L., Yan, H., & Lam, J. C. (2014). Thermal comfort and building energy consumption implications. *Renewable and Sustainable Energy Reviews*, 30, 273–286.
- [24] Yang, Y., et al. (2025). Model predictive control strategies for HVAC systems. *Frontiers in Energy Research*, 13, 1542107.
- [25] Yu, L., Qin, S., Zhang, M., Shen, C., Jiang, T., & Guan, X. (2020). Multi-agent deep reinforcement learning for HVAC control. *IEEE Transactions on Smart Grid*, 11(5), 4103–4114.
- [26] Zhang, Z., Chong, A., Pan, Y., Zhang, C., & Lam, K. P. (2018). Whole building energy prediction using neural networks. *Applied Energy*, 216, 277–289.
- [27] ASHRAE. (2020). *ASHRAE Standard 55: Thermal environmental conditions for human occupancy*. American Society of Heating, Refrigerating and Air-Conditioning Engineers.
- [28] Aghili, S. A., et al. (2025). Artificial intelligence approaches in building energy management systems. *Buildings*, 15(7), 1008.

- [29] Ahmed, N., et al. (2026). AI-based energy management in smart buildings. *Energy Reports*, 12, 567–580.
- [30] Moveh, S., et al. (2025). Thermodynamic optimization using machine learning and MPC. *Sustainability*, 17(5), 1955.
- [31] Al-Kabaha, Y., et al. (2025). Multi-objective optimization of energy, cost, and emissions in buildings. *Energy Reports*, 11, 2345–2358.
- [32] Soleimani, M., et al. (2024). Multi-objective HVAC optimization using deep learning. *Building and Environment*, 245, 110567.
- [33] Li, N., et al. (2017). Multi-objective optimization of HVAC systems using PSO. *Building Simulation*, 10(3), 345–356.
- [34] Garces-Jimenez, A., et al. (2021). Genetic and swarm algorithms for HVAC optimization. *Mathematics*, 9(18), 2181.
- [35] Satrio, P., et al. (2019). HVAC optimization using ANN and GA. *Sustainable Energy Technologies and Assessments*, 35, 100543.
- [36] Elsheikh, A., et al. (2023). Multi-objective GA for HVAC optimization in different climates. *Journal of Building Engineering*, 65, 105678.
- [37] Latifah, A., et al. (2025). Digital twin-based HVAC optimization using GA. *Journal Européen des Systèmes Automatisés*, 58(2), 245–256.
- [38] Waheed, S., & Li, S. (2025). Genetic programming for HVAC control optimization. *International Journal of Renewable Energy Development*, 14(1), 123–134.

