

Experimental Investigation of Performance and emission Characteristics of Rice Bran Biodiesel and It's Blends on Lhr Engine

Syed Shakeer¹ M. C. Navindgi²

¹M.Tech Student ²Professor

¹Department of Thermal Power Engineering ²Department Mechanical Engineering

^{1,2}Poojya Doddappa Appa College of engineering, Gulbarga, Karnataka, India

Abstract— Diesel is a fossil fuel that is getting depleted at a fast rate. So an alternative fuel is necessary and a need of the hour. Rice bran oil, which is cultivated in India at large scales, has a high potential to become an alternative fuel to replace diesel fuel. Direct use of rice bran oil cannot be done, as its viscosity is more than the diesel fuel, and hence affects the combustion characteristics. The rice bran oil is esterified to reduce the viscosity and it is blended with diesel on volume basis in different proportions. The use of thermal barrier coatings (TBCs) to increase the combustion temperature in diesel engines has been pursued for over 20 years. Increased combustion temperature can increase the efficiency of the engine. However, TBCs have not yet met with wide success in diesel engine applications because of various problems associated with the thermo-mechanical properties of the coating materials. Although, the in-cylinder temperatures that can be achieved by the application of ceramic coatings can be as high as 850-9000C compared to current temperatures of 650-7000C. The increase in the in-cylinder temperatures helped in better release of energy in the case of biodiesel fuels thereby reducing emissions at, almost the same performance as the diesel fuel. Here the effort has been made to determine the performance and emission characteristics of RBOME blend with diesel in conventional engine and LHR engine.

Key words: LHR Engine, normal engine Biodiesel, Rice bran oil, RBOME, Performance and Emission Characteristics, Thermal barrier coating

I. INTRODUCTION

Petroleum based fuels play a vital role in rapid depletion of conventional energy sources along with increasing demand and also major contributors of air pollutants. Major portion of today's energy demand in India is being met with fossil fuels. Hence it is high time that alternate fuels for engines should be derived from indigenous sources. As India is an agricultural country, there is a wide scope for the production of vegetable oils (both edible and non-edible) from different oil seeds. The past work revealed that uses of vegetable oils for engines in place of diesel were investigated. Though the concerned researchers recommended the use of vegetable oils in diesel engines, there was no evidence of any practical vegetable oil source engines. It is known that the efficiency of internal combustion diesel engines changes 38-42%. It is about 60% of the fuel energy dismissed from combustion chamber. To save energy, combustion chamber component are coated with low thermal conduction materials. The effect of thermal barrier coating on the cylinder components like piston crown top, cylinder liner, cylinder head inside and valves. The thermal barrier coated engines are otherwise known as low heat rejection (LHR) engines. Due to the insulation of the cylinder wall the heat transfer through the cylinder walls to the cooling system is reduced which

change the combustion characteristics of the diesel engine. To know the changes during combustion the steady-state LHR engines operation have been studied by applying either the first or second law of thermodynamics. The state of the art of the thermal barrier coating is the yattia stabilized zirconia. In addition, other material systems have been investigated for the next generation of TBC. The study also focuses on coating method for yattia Stabilized Zirconia (YSZ) to improve coating under high load and temperature cyclical conditions encountered in the real engine. The effect of insulation on engine performance, heat transfer characteristics, combustion and emission characteristics are studied and compared with standard (STD) diesel engine.

II. MATERIALS AND METHODS

The extraction of biodiesel is carried out by base catalyzed transesterification method.

A. Process of Extracting

Properties	Diesel	RB20	RB40	RB100
Kinematic viscosity at 40oC (Cst)	2.54	3.024	3.617	5.4
Calorific value (kJ/Kg)	42500	42270	41976	37933
Density (kg/m ³)	840	838	846	875
Flash Point (°C)	54	79	98	165
Fire Point (°C)	64	89	110	185

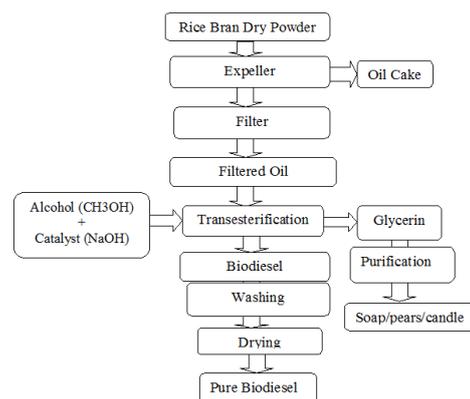


Fig 2.1: The flow chart for biodiesel production

To a one liter of raw Rice bran oil is heated up to 70C. 300 ml of methanol & 5-7gms of NaoH (catalyst) is added and the mixture is maintained at 65-70⁰C is about 1½ hours and stirred continuously. The mixture is allowed to settle for 20-30 min until the formation of biodiesel and glycerin layers. The glycerin is removed from the bio-diesel


in a separating funnel. The bio diesel produced from rice bran oil is ready to use.

B. Transesterification

It is most commonly used and important method to reduce the viscosity of vegetable oils. In this process triglyceride reacts with three molecules of alcohol in the presence of a catalyst producing a mixture of fatty acids, alkyl ester and glycerol. The process of removal of all the glycerol and the fatty acids from the vegetable oil in the presence of a catalyst is called esterification.

C. Chemical reaction

Physical and chemical properties are more improved in esterified vegetable oil because esterified vegetable oil contains more cetane number than diesel fuel. These parameters induce good combustion characteristics in vegetable oil esters. So unburnt hydrocarbon level is decreased in the exhaust. It results in lower generation of hydrocarbon and carbon monoxide in the exhaust than diesel fuel. The vegetable oil esters contain more oxygen and lower calorific value than diesel. So, it enhances the combustion process and generates lower nitric oxide formation in the exhaust than diesel fuel.

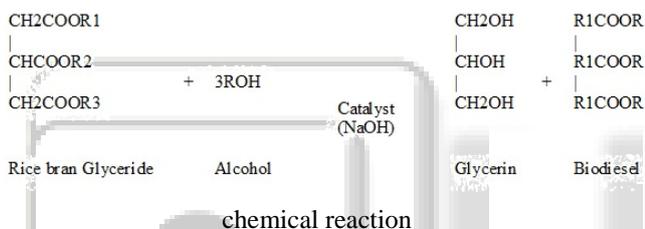

III. PROPERTIES OF DIESEL AND SOME BLENDS

After transesterification the properties of Rice bran oil blends was determined. It was found that the properties of Rice bran oil blends were similar to diesel. Rice bran oil blends were similar to diesel.

Properties	Diesel	RB20	RB40	RB100
Kinematic viscosity at 40°C (Cst)	2.54	3.024	3.617	5.4
Calorific value (kJ/Kg)	42500	42270	41976	37933
Density (kg/m ³)	840	838	846	875
Flash Point (°C)	54	79	98	165
Fire Point (°C)	64	89	110	185

Table 3.1: Properties of Rice bran oil blends

IV. EXPERIMENTAL SETUP

The experimental setup enables study performance, combustion and emission characteristics. The experiments have been carried out on a DI compression ignition engine for various blends of simarouba oil with diesel (RB20, RB40, RB60, RB80, and RB100) with varying brake power. The experiment is carried out at constant compression ratio of 17.5:1 and constant injection pressure of 200 bar by varying brake power.

Manufacturer	Kirloskar oil engines Ltd, India
Model	TV-SR, naturally aspirated
Engine	Single cylinder, DI
Bore/stroke	87.5mm/110mm
Compression Ratio	17.5:1
speed	1500r/min, constant
Rated power	5.2kw
Working cycle	4 stroke
Injection pressure	200bar/23 def TDC
Type of sensor	Piezo electric
Response time	4 micro seconds

Table 4.1: Engine specifications



Fig 4.1:

Photograph of engine setup

V. RESULT AND DISCUSSION

After detail study of performance and emission characteristics of rice bran biodiesel and its blends in normal engine and low heat rejection engine it can be seen that 20% rice bran biodiesel blend and diesel are having same almost same characteristics so here the comparative analysis is carried out between normal engine and LHR engine.

A. Performance characteristics

1) Specific fuel consumption

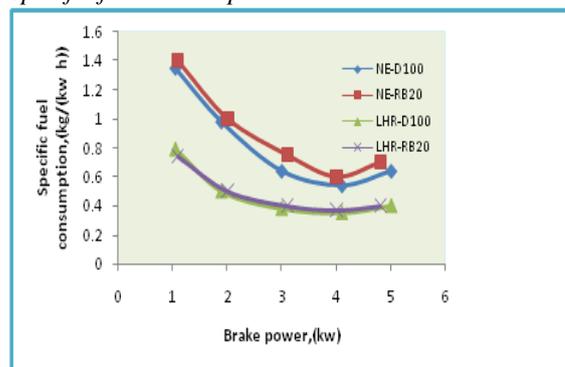


Fig 5.1: The variation of the specific fuel consumption with brake power for diesel and rice bran blends

The variation of the specific fuel consumption with load for diesel and RBOME blends are shown in figure 5.1. The decrease in SFC with increase in load was observed. The SFC of diesel engine depends on the relationship among volumetric efficiency fuel injection, fuel density viscosity

and lower heating value. More biodiesel and its blends are needed to produce the same amount of energy due to its lower heating value its comparison with diesel fuel. The SFC increased with the increasing proportion of biodiesel in the blend.

2) Air fuel ratio

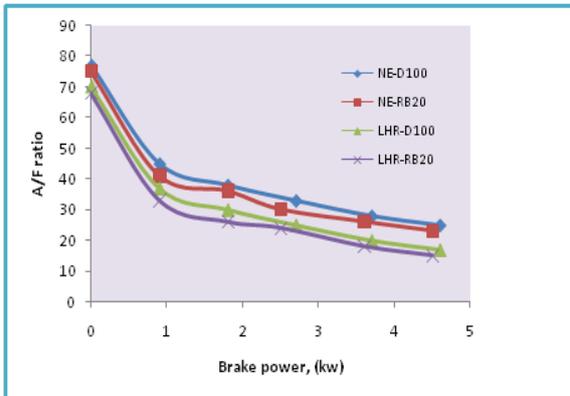


Fig 5.2: The variation of the A/F ratio with brake power for diesel and rice bran blends

The variation of the air fuel ratio with load for diesel and RBOME blends are shown in figure 5.2. The fuel consumption is for RBOME blends compared to diesel hence air fuel ratio decreases with increase in load because air fuel mixing process is affected by the difficulty in atomisation of the biodiesel due to its higher viscosity.

3) Brake thermal efficiency

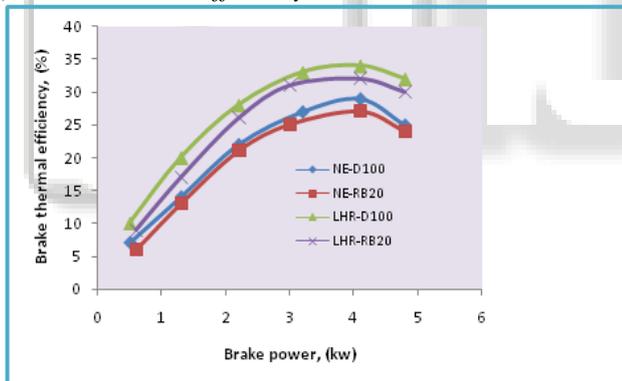


Fig 5.3 The variation of the brake thermal efficiency with brake power for diesel and rice bran blends

The variation of the brake thermal efficiency with load for diesel and RBOME blends are shown in figure 5.3. We can observe that RB20 with LHR has higher brake thermal efficiency than normal engine D100 this is because of increased combustion rate which provides complete burning of fuel and due to low heat rejection. The thermal efficiency of RB20 is lower than diesel due to large difference in viscosity specific gravity and volatility.

4) Exhaust gas emission

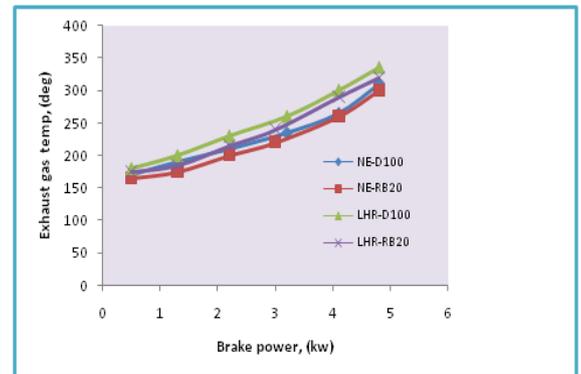


Fig 5.4: The variation of the exhaust gas temperature with brake power for diesel and rice bran blends

The variation of the exhaust gas temperature with load for diesel and RBOME blends are shown in figure 5.4. When Biofuel concentration increases the exhaust temperature increase. The same case when load increases the exhaust temperature increases. This is due to the heat release rate by the biodiesel during the expansion is comparatively lower than diesel.

B. Emission characteristics

1) Carbon monoxide

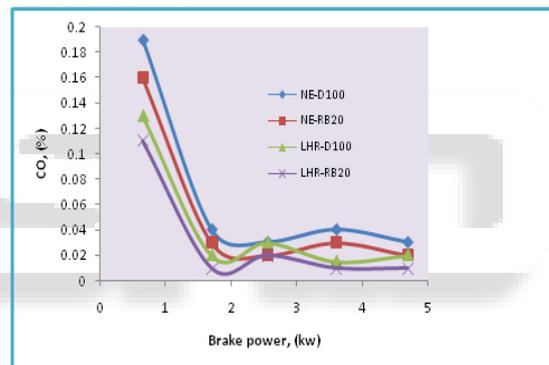


Fig 5.5: The variation of the carbon monoxide with brake power for diesel and rice bran blends

The variation of carbon monoxide (CO) with engine power output is presented in figure 5.5. The fuels are producing higher amount of carbon monoxide emission at low power outputs and giving lower values at higher power conditions. Carbon monoxide emission decreases with increasing power output. With increasing biodiesel percentage, CO emission level decreases. Biodiesel itself has about 11 % oxygen content in it and it may helps for the complete combustion. Hence, CO emission level decreases with increasing biodiesel percentage in the fuel.

2) Hydro carbon

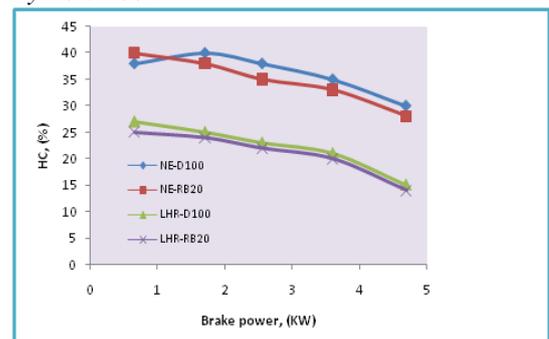


Fig 5.6: The variation of the hydro carbon with brake power for diesel and rice bran blends

The variation of hydrocarbon (HC) with respect to engine power output for different fuels are shown in figure 5.6. The high operating temperature in LHR engine makes the combustion nearly complete than the limited operating temperature condition as in the case of diesel engine. All full load hydrocarbon emission levels are decreases for LHR engine fueled with biodiesel than LHR engine fueled with diesel and diesel engine fueled with diesel. The air fuel mixture, which was accumulated in the crevice volume, was reduced due to the high temperature and availability of oxygen, which in turn leads to reduction in unburned hydrocarbon emissions.

3) Nitrogen oxide

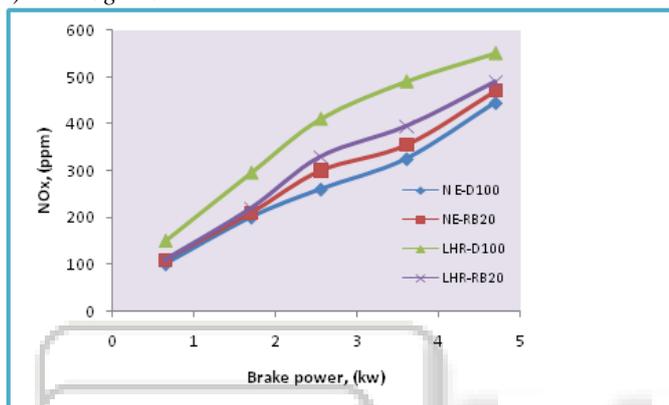


Fig 5.7: The variation of the nitrogen oxide with brake power for diesel and rice bran blends

Figure 5.7 shows the variation of oxides of nitrogen with engine power output. The main reason for the formation of oxides of nitrogen in an IC engines are high temperature and availability of oxygen. At maximum load, NOx emission for LHR engine with biodiesel fuel is higher. In LHR engine, the operating conditions are in favor of NO species and such as the availability of oxygen in the fuel itself other than the oxygen available in the air and high temperature due to insulation coating, which enhance the NO species formation.

VI. CONCLUSION

- As detail study of performance characteristics of rice bran biodiesel and its blends on normal engine we can observe that 20% blend of rice bran biodiesel in diesel fuel has almost same mechanical efficiency, same specific fuel consumption.
- We can also see that there is slight increase in brake thermal efficiency which is a positive sign with this blend.. So we can conclude that without any modification in engine we can save diesel fuel for certain extent without any compromise with standard performance characteristics and in future rice bran biodiesel can be a best alternative fuel which can replace the diesel.
- As same parameters studied with engine modification, here we observed that there is increase in performance parameters than normal engine. There is increase in parameters like brake

thermal efficiency, mechanical efficiency and there is decrease in specific fuel consumption and fuel consumption which can be observed in comparative graph.

- By studying performance characteristics on normal engine and low heat rejection engine, it can concluded that with 20% blend we can achieve same characteristics as that of diesel fuel so RB20 is the best blend and in future rice bran methyl ester can be a best and most suitable alternative fuel which can replace diesel fuel for years to come and with thermal barrier coating we can meet needy requirements.
- Rice bran biodiesel shows lower heat release rate during premixed burning phase compared to diesel. The high viscosity and poor volatility of NE-D100 result in poor atomization and fuel air mixing rates. Heat release rate is more in LHR-RB20 compared to LHR-D100 and heat release rate in NE-D100 and NE-RB20 are almost similar.
- We can conclude that the RB20 with LHR shows same graphs as compared to D100 this blend is best suitable for an engine.
- It was found that, CO and HC emissions for LHR engine with biodiesel was considerably lower than LHR engine fueled with diesel. This reduction of emissions due to excess oxygen availability along with higher operating temperature.
- NO emission for LHR engine with biodiesel fuel was higher than LHR engine fueled with diesel. The operating conditions of LHR engine were favorable to NO formation. However this increase in emission level was within the acceptable limits.

REFERENCES

- [1] Murthy P.V.K , Murali Krishna M.V.S , Sitarama Raju A , Vara Prasad C.M. Srinivasulu N.V. Performance evaluation of low heat rejection diesel engine with pure diesel. international journal of applied engineering research, dindigul volume 1, No 3, 2010
- [2] Sivanathan Sivalaxmi and Thangavel Baluswamy. Experimental investigation on a diesel engine fueled with neem oil and its methyl ester, thermal science, year 2011, Vol. 15, No. 4, Pp. 1193-1204.
- [3] Lovekush Prasad1, Dr. Alka Agrawal, Experimental investigation of performance of diesel engine working on diesel and neem oil blends, iosr journal of mechanical and civil engineering (IOSRJMCCE) ISSN : 2278-1684 Volume 1, Issue 4 (July-August 2012), PP 48-51.
- [4] K.Dilip Kumar1 P.Ravindra Kumar. Experimental investigation of cotton seed oil and neem methyl esters as biodiesel on CI engine. international journal of modern engineering research (IJMER) Vol.2, Issue.4, July-Aug 2012 pp-1741-1746 ISSN: 2249-6645
- [5] K. Arun Balasubramanian, Dual Biodiesel Blends in Diesel Engine - Performance and Emission Analysis, European Journal of Scientific Research ISSN 1450-216X Vol.75 No.3 (2012), pp. 400-408.

- [6] shish Jawalkar1 et.al. Performance and emission characteristics of mahua and linseed biodiesel operated at varying injection pressures on ci engine, international journal of modern engineering research (IJMER) www.ijmer.com Vol.2, Issue.3, May-June 2012 pp-1142-1149 ISSN: 2249-6645.
- [7] B.K.Venkanna, C.Venkataramana Reddy. Performance, emission and combustion characteristics of direct injection diesel engine running on calophyllum inophyllum linn oil (honne oil) Int J Agric & Biol Eng Vol. 4 March, 2011.
- [8] M. C. Navindgi et.al. Influence of injection pressure, injection timing and compression ratio on performance, combustion and emission of diesel engine using castor methyl ester blends. International Journal of Engineering Science and Technology (IJEST).
- [9] Elango T et.al. Effect of methyl esters of neem and diesel oil blends on the combustion and emission characteristics of a CI engine. Vol. 5, No. 10, October 2010 ISSN 1819-6608 Arpn Journal Of Engineering And Applied Sciences.

