

Removal of Cod and Turbidity by Electrocoagulation (EC) Technique

Chethan Marol¹ Siddaling Talawar² Dattatreya Narale³ Gurappagoud Biradar⁴ Rajeshwari Nagaral⁵

^{1,2,3,4,5}Assistant Professor

^{1,2,3,4,5}Department of Civil Engineering

^{1,2,3,4,5}Secab Engineering Collage, Vijayapur, Karnataka, India

Abstract— The sugar industry generated strong waste water characterized by high COD and Turbidity. Furthermore, the sugar industry is one of the largest sources of industrial effluents. Hence, the cost effective treatment of sugar effluent for environmental protection is a challenging task. The removal of pollutants from sugar industries waste water is experimentally investigated using direct current electro-coagulation (EC). In this study, the effect of pH, electrolysis time (ET), applied voltages were examined. The COD and Turbidity in the aqueous phase is effectively remove when aluminum electrodes use. It is the observed that the removal efficiency is directly proportional to the electrode material contact time, voltage and inversely proportional to electrode gaps. In this paper we observed the highest removal of efficiency. The removal of COD and turbidity was 96% and 94%. Those electro-coagulation (EC) technology with aluminum electrode in bipolar parallel system could be an attractive alternative for the treatment of sugar effluents.

Key words: Sugar effluents, Electro-coagulation treatment, Aluminum electrodes, COD, Turbidity

I. INTRODUCTION

Effluent discharges from agro based industries like sugar are characterized by high COD due to their high level of organic contents and this effluent contains milk and milk products with wash water[1]. Rapid urbanization and industrialization in the developing countries like India pose severe problems in collection, treatment and disposal of effluents. This situation leads to serious public health problems. Unmanaged organic waste fractions from industries, municipalities and agricultural sector decompose in the environment resulting in large scale contamination of land, water and air. These wastes not only represent a threat to the environmental quality but also possess a potential energy cane crushed. Because of high value which is not fully utilized despite the fact that they are cheap and abundant on most parts of the world [2]. Large quantity of wastewater originates due to their different operations. The organic substances in the wastes comes either in the form in which they were present in milk, or in a degraded form due to their processing. As such, the sugar industry wastewater, though biodegradable, are very strong in nature sugar waste effluents are concentrated in nature, and the main contributors of organic charge to these effluents are carbohydrates, proteins and fats originating from milk. The liquid waste from sugar industries originates from different sections like receiving station, bottling plant, cheese plant, casein plant, condensed milk plant, dried milk plant and ice cream plant. The sugar industry wastes are very often discharged intermittently. The nature and composition of waste depends on the type of products produced and size of the plant [3]. Increased research has been dedicate towards

the treatment of wastewater using electrocoagulation (EC) and advance oxidation process (AOP's) such as Fenton reaction or ozone process because of the increase in environmental restrictions on discharge of untreated wastewater.

Electrocoagulation (EC) is an electrochemical method for the treatment polluted water which has been successfully implemented in of soluble or colloidal wastewater pollutants found in slaughterhouses, vegetable oil refineries and sugar industry manufacturing facilities.

Electrocoagulation is an electrochemical technique that consists of the generation of coagulants in situ by dissolving electrically through either aluminum or iron ions from electrodes. The metal ion generation occurs at the anode, when the hydrogen gas is released from the cathode. The hydrogen gas assists in floating the flocculated particles to the surface. During this process the electrodes can be arranged in a mono-polar or bipolar mode [4].

II. THEORY OF ELECTROCOAGULATION


The EC is a process in which the anode material undergoes oxidation whereas the cathode subjected to reduction and hence, various monomeric polymeric metal hydrolyzed species are formed at the electrode surface. These metal hydroxides remove organics from wastewater by sweep coagulation and by aggregating with colloidal particles present in the wastewater to form bigger size flocs and ultimately get removed by settling. The metal ions generation takes place at the anode and hydrogen gas is released from cathode. This hydrogen gas would also help to float the flocculated particles out of the water by process called electro-flotation.

When aluminum is used as electrode materials, the electro-coagulation reactions are as follows [5].

At Anode:



At Cathode:



In the solution:



As seen in the above reactions EC is a combination of oxidation, flocculation and flotation. The EC occurs in three steps. In first step, coagulant is formed because of oxidation of anode. In second step, pollutants get destabilized and in last step the destabilized matters get united and then remove.

III. MATERIALS AND METHODS

A. Analytical Measurements

The sugar effluent used in this study was collected from nearby sugar factory in karjol near to vijayapur. The analysis of wastewater was carried out as per Standard

Methods. The various characteristics of sugar effluent are shown in Table I.

S. NO	Parameters	Values
1	pH	6.3
2	COD	3095.21mg/l
3	Turbidity	234.2NTU
4	TDS	1280mg/l
5	Conductivity	15.23ms/cm
6	Chloride	1425.12mg/l
7	Color	Greenish Yellow

Table 1: Characteristics Of Sugar Effluents

B. Batch Experimental Setup And Methodology

A batch EC reactor was designed and fabricated for the treatment of sugar effluents. The reactor was made up of acrylic material with a total working volume of 1.5L and with the dimensions of 15cmx10cmx10cm. The DC source of 30V and 0-2A was used as a power supply to the system. The EC units having a pair of six electrodes were connected in mono polar parallel system. Aluminum electrodes having dimensions of 10cmx5cmx0.1cm were immersed to a depth of 5cm in the reactor. The space between the electrodes was maintained at 1cm. A magnetic stirrer was used for mixing to form homogeneous solution at 250rpm. The schematic representation of the experimental EC set up is shown in the Fig.1

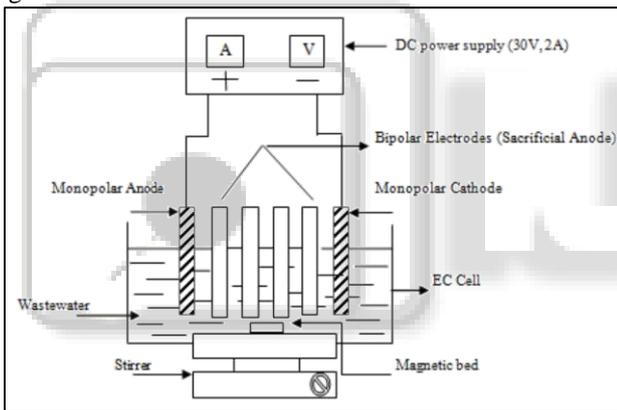


Fig. 1: Bench-scale EC reactor with Bipolar

C. Electrodes In Parallel Connection

After the initial characterization of sugar effluents, the batch EC experiments were conducted to optimize the various parameters such as pH, applied voltage and ET. During each run the voltage was varied to desired value of 10V, 15V, 20V and 25V; whereas pH of the solution was adjusted 5-7 by adding either dilute HCL or NaOH as per the requirement. Before EC experiments, the electrodes were abraded with sand paper to remove scale and were washed with 15-20% HCl followed by a detergent wash for the removal of impurities from the electrode surface. About 2g/L of boric acid was added as electrolyte during the process to increase the conductivity; and also it acted as buffer, so that there was no much change in pH. The EC experiments were performed with 1.5 L of effluent for 75 minutes; and in each run samples were collected at every 15 minutes interval for necessary analysis. All the samples were allowed to settle for one hour before the determination of COD, turbidity and phosphate concentration of treated sugar effluent.

IV. RESULTS AND DISCUSSION

A. Effect of PH and Voltage on Cod Removal

Initially the electrode coagulation process was adopted for the treatment of sugar industry waste water with six aluminum electrodes, three as anode and other three as cathode, connected to the DC power supply. The experiments were conducted at lower voltages but desired efficiencies were not obtained. Hence, the treatment process was carried out for 75mins without adjusting the pH of raw waste water at higher voltages varying between 10, 15, 20 and 25V. The COD analysis of the samples was carried out by retrieving sample at every 15mins interval. The COD removal efficiencies obtained were 7.5%, 12%, 16.25% and 20.35% for 10V,15V, 20V and 25V respectively. The results are represented in the fig 2.1. The removal of COD at different voltage 10V, 15V, 20V and 25V and the efficiency respectively are the 60%, 75%, 80% and 89%.

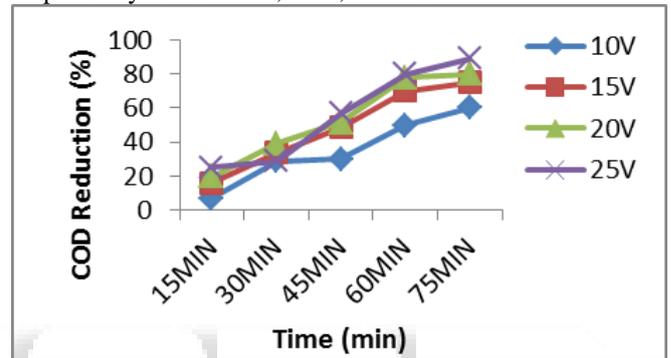


Fig. 2: COD removal with Time at different voltages for pH 6.0

The COD removal efficiencies obtained during above mentioned operating conditions are too low to adopt for any practical operations. This may be due to lesser surface area of the electrodes available for the process to take place or because of higher COD value (3095.21mg/L) of the waste water. Hence further study was carried out using four electrodes in bipolar connection and also by reducing wastewater concentration to half its strength. Bipolar connection was adopted because of its ease of maintenance during the operation of process. Fig2.2

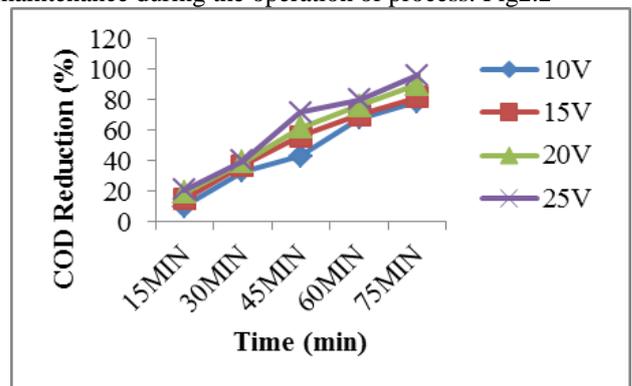


Fig. 3: COD removal with electrolysis time for different voltages at pH 7.0

When experiment was carried out by further increasing the pH to 7.0 with different voltages 10V, 15V, 20V and 25V, the COD removal efficiencies were found to be 79%,82%, 90 and 96% COD from wastewater respectively for 75mins of electrolysis duration and remained constant for 75mins. Fig.2.3.

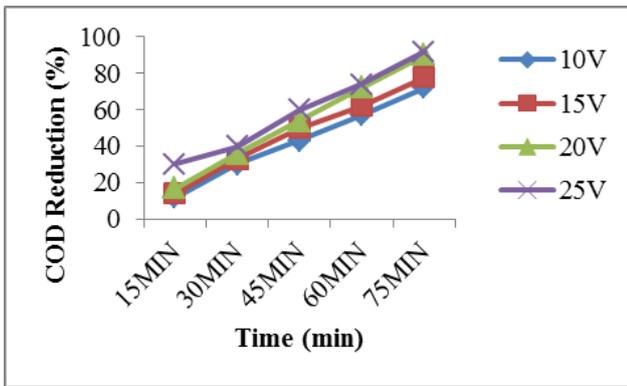


Fig. 4: COD removal with electrolysis time for different voltages at pH 8.0

The results in the above graphs showed that removal efficiency 72%, 78%, 90% and 92% are with respect to voltages 10V, 15V, 20V and 25V increased with increase in applied voltage up to electrolysis time of 75mins. Also during the process it was observed that the density of bubbles increases and their size decreases with an increase in applied voltage resulting in greater and faster removal of pollutants it may be also due to the fact that greater amount of hydroxide flocs were produced by increasing the applied voltage leading to an efficient COD removal. The graphs also indicated an increase in the COD removal with the increase in the electrolysis duration. Increase in the electrolysis duration in the Electrocoagulation process gives rise to a higher concentration of free ions inside the system, consequently increasing the removal efficiency. Increase in the pH value did not increase the removal efficiency but maximum efficiency 96% was obtained at pH 7.0. Thus for the COD removal of sugar industry wastewater the optimum operating parameters were found to be 7.0 pH, 25V and 75mins of electrolysis time

B. Effect of PH and Voltage on Turbidity Removal

The turbidity removal efficiencies of the electrocoagulation process on the sugar industry wastewater were studied by varying pH(6,7 and 8), voltage (10V, 15V, 20V and 25V) and electrolysis duration (75mins). Turbidity results were checked at every 15mins of electrolysis time.

Initially, the experiment was carried out at pH 6.0 with different voltages 10V, 15V, 20V and 25V. The turbidity reduced 78%, 88%, 90% and 92% efficient in removing turbidity from wastewater respectively for 75mins. The turbidity removal efficiencies remained constant for electrolysis duration of 75mins.Fig.3.1

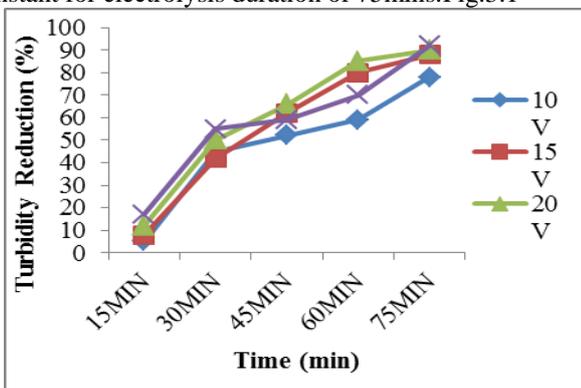


Fig. 5: Turbidity removal with electrolysis time for different voltages at pH 6.0

Later, EC experiment was carried about by adjusting pH to 6.0 with different voltages of 10, 15, 20V and 25V. The turbidity reduced 80%, 86%, 90% and 94% efficient in removing turbidity from wastewater respectively for 75mins of duration (Fig 1.8). The results remained constant at 75mins.Fig 3.2

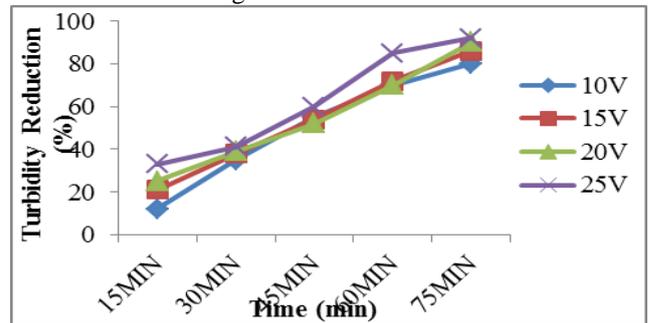


Fig. 6: Turbidity removal with electrolysis time for different voltages at pH 7.0

When experiment was carried out at pH 7.0 with different voltages 10V, 15V, 20V and 25V, the turbidity removal efficiencies were found to be 86%, 88%, 90% and 92% for 60mins of electrolysis duration. The results are represented in Fig 3.3

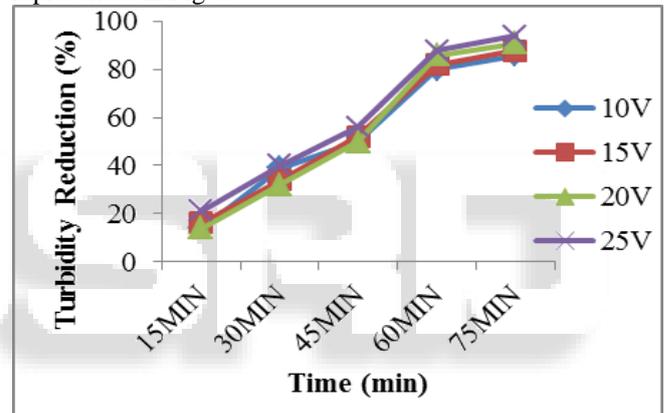


Fig. 7: Turbidity removal with electrolysis time for different voltages at pH 8.0

The studies indicate that, the turbidity removal was dependent on the applied voltage. As the voltage values increased there was increase in the removal of turbidity. At different pH, there was not much difference in the turbidity removal. The maximum turbidity removal of 94% was observed at 25V and 75mins for pH 7.0 because with increase in time and voltage the hydroxyl ion generation also increased. The suspended solids, colloidal matter present in the solution were observed by the ions and were settled at the bottom, hence removing the turbidity of the solution.

V. CONCLUSION

The batch EC studies were performed to investigate the influence of various experimental operating parameters on the removal of pollutants from sugar industry effluents. Thus, the EC technique can be used for the efficient treatment of sugar wastewater using aluminum electrodes in bipolar connection. It is a simple method using minimum electricity and an economic method applicable to industry for the treatment of wastewater, which is fast, easy and which can be operated using less equipment and limited space moving the turbidity of the solution.

REFERENCES

- [1] C.B.Shivayogimath and Rashmi Jahagirdar “Treatment of sugar industry wastewater using electrocoagulation technique” IJRET: International Journal of Research in Engineering and Technology. pp ISSN 2319-1163 Nov-2013.
- [2] Kavyashree.R.Doddamani,Prof.Shashikant.R.Mise “Generation of Electricity Using Sugar mill Waste Water By Microbial Fuel Cell” IJESRT: International Journal Of Engineering Sciences And Research Technology. pp ISSN:2277-9655. Oct-2014.
- [3] Madhusudhan C, Nagarajappa D.P,Manjunath N.T “Performance Evaluation Of Electrocoagulation Process in Treating Dairy Wastewater using Mono-polar Electrodes” IJIRSET: International Journal Of Innovative Research In Science , Engineeing And Technology. pp ISSN:2319-8753 June-2015.
- [4] Ana L. Torres-Sanchez, Sandra J.Lopez-Cervera, Catalina de la Rosa, Maria Maldonado-Vega, Maria Maldonado-Santoyo, Juan M. Peralta-Hernandez “Electrocoagulation Process Coupled With Advance Oxidation Techniques To Treatment Of Dairy Industry Wastewater.”IJES: International Journal Of Electrochemical Science Vol-9[6103-6112]- 2014
- [5] C.B.Shivayogimath and Praveen Meti “Electrochemical Treatment Of Dairy Effluents Using Aluminum Electrodes”. IRF International Conference, Bengaluru, India, pp ISBN:978-93-85465-25-3 May-2015.

