

# Optimization and Fatigue Analysis of Steering Knuckle

Atul Yadav<sup>1</sup> Abhijeet S Kabule<sup>2</sup>

<sup>1</sup>M. E. Scholar <sup>2</sup>Assistant Professor

<sup>1,2</sup>K.J College of Engineering & Management Research, Pune, India

**Abstract**— Light weight, low fuel consumption and high durability are the primary demands for any vehicle. The steering knuckle is a standout amongst the most vital parts of a vehicle. The aim of this research is scale down the mass of an existing steering knuckle component of a local car model, using Creo 2.0, and performing its shape optimization, using Hyperworks as pre and post processor and Nastran as a solver, in order to meet the required strength attributes at the cost of minimum weight. The Investigation has been successful in optimizing the steering knuckle satisfying the required attributes and achieving a weight reduction of 8.81% in comparison with its initial model. Fatigue analysis is performed on the model to investigation the load bearing behavior of steering knuckle under when in operation.

**Key words:** Creo, Fatigue, Linear Static, Nastran, Steering Knuckle, Optimization

## I. INTRODUCTION

Steering knuckle or hub carrier is a forging that usually includes the spindle and steering arm, and allows the front wheel to pivot. The knuckle is bestrode within the upper and lower ball joints on a Short Lower Arm (SLA) suspension, and between the strut and lower ball joint on a Macpherson strut suspension. Steering knuckle is the part of front axle assembly which fastens to the spindle and is held in place by the kingpin. This part is located at the front axle of a vehicle. It holds the wheel as it also hold the lower control arm, upper control arm, upper ball joint, and also the lower ball joint. If vehicles past through a bad surface or cobblestone slalom, the road forces are then transferred into the knuckle. Due to this condition, some cases, these pivot have occurs fatigue effect. [1] The steering knuckle is the connection between the tie rod, stub axle and axle housing.



Fig. 1 Steering knuckle

## II. OBJECTIVES

Objective of this investigation is reduction of mass of the steering knuckle of a vehicle including certain additional required parameters. Whereas methodology remains same for other geometries with some minor changes in design. This research focuses on topology and shape optimization. Finite element analysis has been used to implement optimization and maintaining stress and deformation levels and achieving high stiffness which will reduce the cost with

respect to the mass production process. Fatigue analysis performed on the finite element mode to study the load-bearing behavior of steering knuckle under operating conditions.

The broad objectives of the project are:

- 1) To study the stress analysis of the existing steering knuckle.
- 2) To redesign the steering knuckle and optimize the same to avoid failure.
- 3) Fatigue life prediction of steering knuckle.

## III. LITERATURE REVIEW

Viraj Rajendra Kulkarni his study focuses on optimization of steering knuckle targeting reducing weight as objective function, while not compromising with required strength, frequency and stiffness. Taking into consideration static and dynamic load conditions, structural analysis and modal analysis were performed.[2]

Purushottam Dumbre et al performed structural analysis on steering knuckle for static condition found out the stress level generated and used topology optimization to reduce the weight by 11% while meeting the strength requirement.[3]

Ameya Bhusari, Aditya Chavan and Sushant karmarkar shows a revised design which showed a 62.78% reduction in weight and 62.95% reduction in material volume as compared to the initial design; while having a factor of safety of 2.05. The overall weight of the vehicle can be reduced to achieve savings in costs and materials, as well as, improve fuel efficiency and reduce carbon emissions. The unsprung mass of the vehicle is reduced by 6.4kg which will contribute to improved vehicle handling. [4]

## IV. METHODOLOGY

This research project investigated weight and opportunities and fatigue analysis that a SG Iron offer. The steering knuckle chosen for this project belonged to a passenger car. In this investigation, first a literature review on several aspects of steering knuckle in the areas of load and stress analysis, durability, manufacturing, economic and cost analysis, and optimization was carried out. First, the steering knuckle was digitized. Load analysis was performed based on the input from the design calculation performed. A linear static FEA at that point performed utilizing the results from load analysis to gain insight on the structural behavior of the steering knuckle and to determine the design loads for optimization. Component fatigue analysis was also performed to predict the durability of the optimized steering knuckle.

## V. DESIGN OF STEERING KNUCKLE

While doing the analysis of Knuckle, forces to be considered are – Self-weight, Braking, Steering and

Cornering/Lateral forces. So as to keep up the sturdiness of the design, the model is subjected to extreme conditions as suggested by Sharma [2], considering Generic (G) forces when all the forces are considered to be acting simultaneously. The weight of the vehicle for this investigation is 1185kg. Considering the weight, the magnitude of each of the forces were ascertained and depicted in the table I.

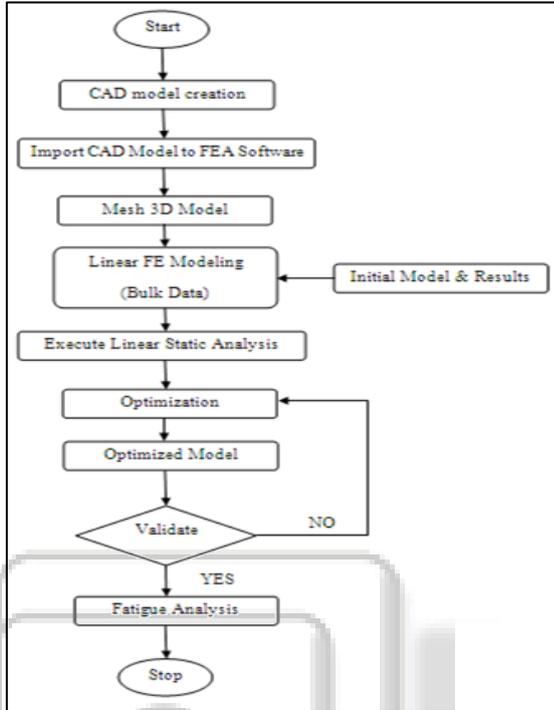


Fig. 2: Methodology

Braking force	1.5G
Lateral force	1.5G
Steering force	Steering effort of 40-50N
Load in X-direction	3G
Load in Y-direction	3G
Load in Z-direction	1G

Table 1: Units for Magnetic Properties

There are two sorts of burden following up on knuckle i.e. force moment. This knuckle is intended for vehicle of 1185 kg weight. Braking following up on it produces moment. By measurement perpendicular distance is 92mm

**A. Moment**

According to the weight distribution of the car the weight acting on each wheel is 296.25kg.

The moment on the steering knuckle is produced due to braking of car hence it is necessary to calculate the force due to braking:

- Braking force = 1.5G = 1.5x9.81x296.25 = 4359.318 N
- Moment = braking force x perpendicular distance = 4359.318 x 92 = 401057.325 Nmm

This moment is acting on steering knuckle where break caliper is mounted. Brake calliper is mounted at three locations therefore distributing moment at three points, Therefore, moment at each point is  
Moment = 401057.325 / 3 = 133685.775 Nmm

**B. Force**

Wheels load constituents in the X, Y and Z axis. These loads are due to the response because of footing, vertical response because of vehicle weight and directing response.

$$\begin{aligned}
 X - \text{axis} &= Y - \text{axis} = 3G \\
 &= 3 \times 9.81 \times 296.25 \\
 &= 8781.6377 \text{ N} \\
 Z - \text{axis} &= 1G \\
 &= 1 \times 9.81 \times 296.25 \\
 &= 2906.2125 \text{ N}
 \end{aligned}$$

Since all load in X, Y, and Z direction are perpendicular to each other, the resultant of all the forces s given by,

$$\begin{aligned}
 F &= \sqrt{X^2 + Y^2 + Z^2} \\
 F &= \sqrt{8781.6375^2 + 8781.6375^2 + 2906.2125^2} \\
 F &= 12667.87 \text{ N}
 \end{aligned}$$

**VI. FINITE ELEMENT ANALYSIS OF STEERING KNUCKLE**

To watch max stress produce into steering knuckle, model is submitted to extreme consideration and analysis is carried out. The loading and boundary condition is shown in figure 3.

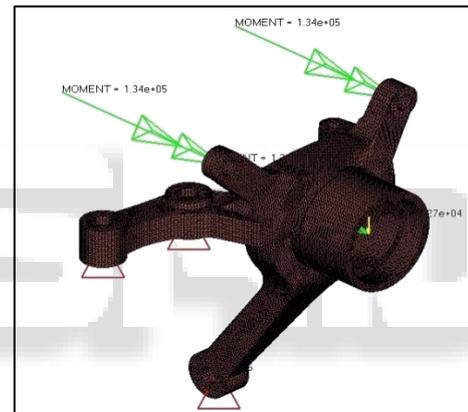


Fig. 3: Details of Loading and Boundary Condition

The stress and deformation is shown in figure 3 &

4.

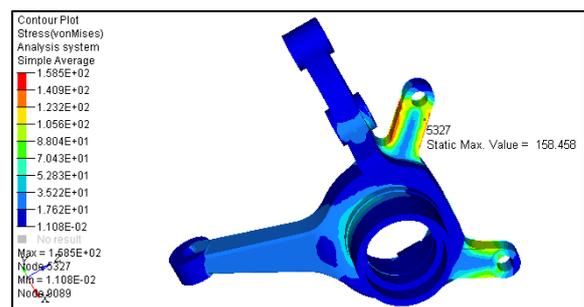


Fig. 4: Stress and Deformation in Steering knuckle

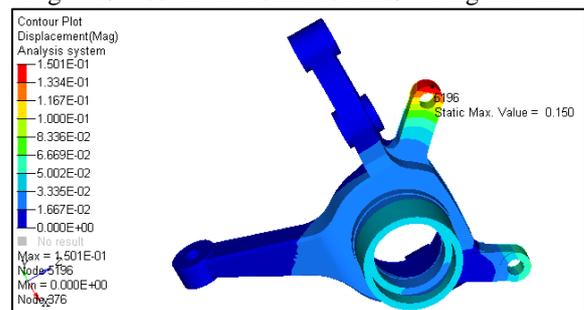


Fig. 5: Stress and Deformation in Steering knuckle

Parameter	Value
Stress (Von-Mises)	158.48 MPa
Deflection	0.15 mm
Weight	2.769 kg

Table 2: Result Table

From the analysis it can be seen that the maximum stress is induced on the brake calliper area and it is well below the yield stress of the material hence the design is safe. Therefore the analysis allows the objective of dissertation as to reduce the weight of the steering knuckle by using structural optimization.

### VII. STRUCTURAL OPTIMIZATION

The optimization opted here is shape optimization. Shape optimization is a mechanized approach to change the structure shape in light of predefined shape variables to locate the ideal shape. DVs are utilized to change the geometry shape of the component, on HyperMesh it is used HyperMorph to define this parameter.

In the optimization process step by step iterations are taken to minimize the weight with Von Mises stress as constraints. The areas showed inside the box in fig 6 are the area from where the material has been removed in each iteration. The analysis is done for the different optimized steering knuckle for the stress verification. The loading and boundary condition are kept same as used in initial model i.e. before optimization.

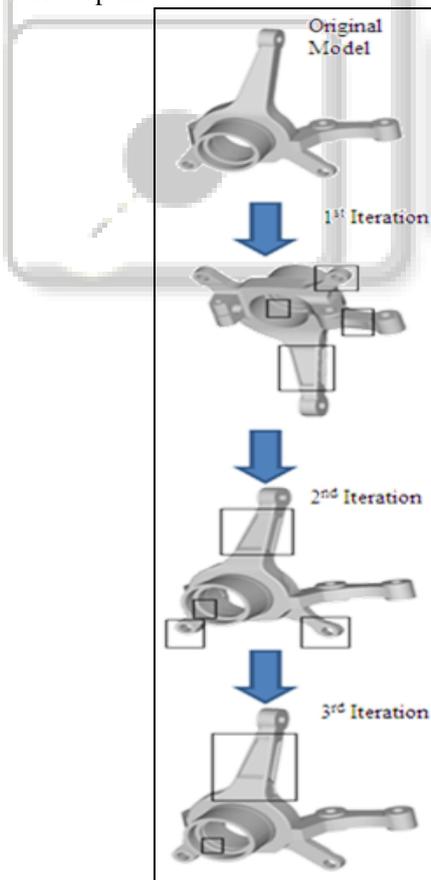


Fig. 6: Structural Optimization of Steering Knuckle

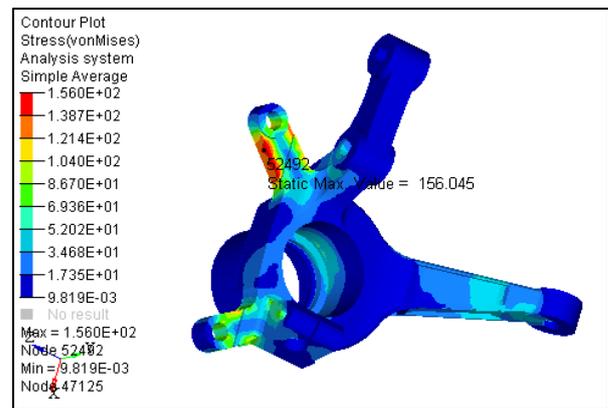


Fig. 7: Stress and Deformation in 3<sup>rd</sup> (Final) Iteration

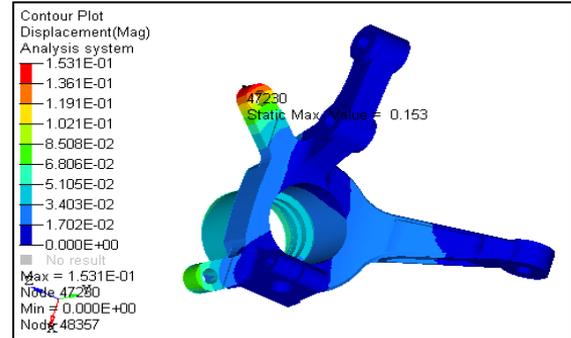


Fig. 8: Stress and Deformation in 3<sup>rd</sup> (Final) Iteration

### VIII. EXPERIMENTAL VALIDATION

The component produced for the experimentation is made up of SG is used for the testing. The component is fixed using fixture and load is applied.



Fig. 9: Experimental Testing

Parameter	Stress determined by FEA	Stress recorded during exp.	Percentage variation in results
Max Stress (Mpa)	156.045	168.88	6.94%

Table 2: Result Comparison between FEA and Experimental

The Test Report for the component for verifying the results with the Analytical method of analysis are compared it is observed that the results are much closer. Typically, depending on the type of Test and the application, an error margin or about 5 to 10% could be considered close towards validating the proposed design.

The stress determined by FEA is 156.045 Mpa and the stress determined by the test is about 168.88 Mpa. Hence the percentage variation in result is 6.94 %.

### IX. FATIGUE ANALYSIS

Steering knuckle fatigue life calculated is based on stress-life approach. The fatigue life of 5938164.5 cycles which is predicted in analysis, shows that crack initiation will start after these numbers of cycles.

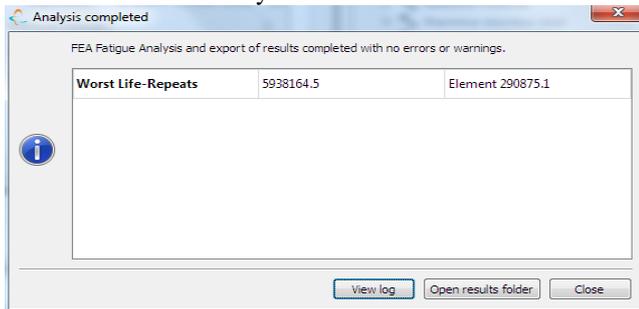


Fig. 10: Worst Cycle Repeats

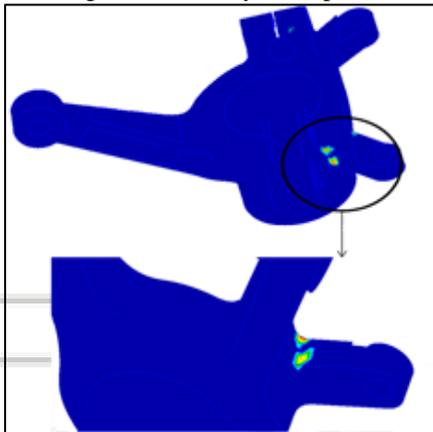


Fig. 11: Fatigue Location of Steering Knuckle

### X. RESULT AND DISCUSSION

The steering knuckle is exposed to its maximum loading condition and a stress of 154.8 MPa is generated which is less than the yield strength of the material, hence we can say that it component is safe under calculated loading. After structural optimization stress reduction of 1.56% is observed in the final model. Displacement in each of the model is observed is relatively same. The weight of the component is one the major domain area; the automobile is working as it influence the automobile economy, pollution and the components manufacturing cost. Hence a virtual optimization task was performed and using shape optimization a reduction of 8.81% is achieved. Fatigue analysis predicted the minimum cycles as 5938164.5 before crack starts.

Attributes	Von Mises Stress (MPa)	Deformation (mm)	Weight (kg)
Original	158.480	0.150	2.769
Iteration 1	367.300	0.257	2.433
Iteration 2	251.200	0.267	2.489
Iteration 3	156.045	0.153	2.525

Table 2: Stress and Displacement Induced in Various Modified Steering Knuckle

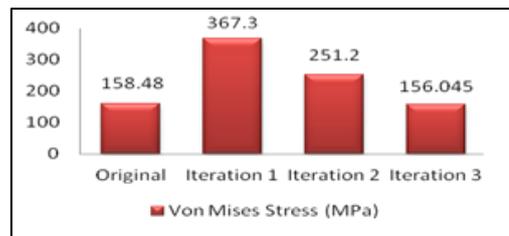


Fig. 12: Stress Change in Steering Knuckle

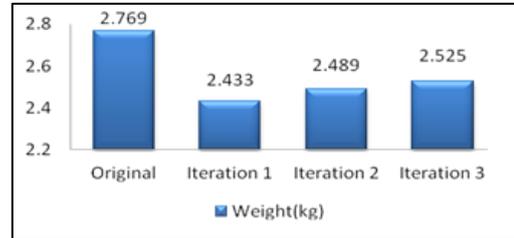


Fig. 13: Weight Change in Steering Knuckle

### XI. CONCLUSION

The following conclusions can be drawn from this investigation:

- 1) The existing and modified design is modeled using modeling software and various attributes are obtained and the results are taken and compared.
- 2) The working stress developed in the steering knuckle is 158.8MPa which is less than the yield stress which improves the design life of the steering knuckle.
- 3) To improve performance geometry has been modified using shape optimization which enables to reduce stress levels marginally below yield limit.
- 4) Reduction of weight was one of our primary aims. We found that weight can be reduced using structural optimization process. After applying load and design constraints, stress analysis and shape optimization was performed a weight reduction of 8.81% is observed.
- 5) Fatigue analysis predicted the minimum cycles as 5938164.5 before crack starts.

### ACKNOWLEDGMENT

I express my sincere thanks to Prof. P.E Ingale (head of the department mechanical engineering) for his kind cooperation for presenting this paper. I additionally extend my genuine on account of every single other individual from the workforce of mechanical building division and my companions for their co-operation and consolation.

### REFERENCES

- [1] Mr. V.Sivananth Dr. S.Vijayarangan Mr. R.Asawthaman "Fatigue and Impact Analysis of Automotive Steering Knuckle under Operating Load Cases" Altair Technology conference 2015 India.
- [2] Mahesh P. Sharma, Denish S. Mevawala, Harsh Joshi, Devendra A. Patel "Static Analysis of Steering Knuckle and Its Shape Optimization" IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) e-ISSN: 2278-1684, p-ISSN: 2320-334X PP 34-38 www.iosrjournals.org.
- [3] M.R. Idris, W.M.Wan Muhamad, S.Z. Ismail "Failure modes of a vehicle component designed for fuel efficiency" Proceedings of the 2014 International

- Conference on Mathematical Methods, Mathematical Models and Simulation in Science and Engineering.
- [4] Viraj Rajendra Kulkarni and Amey Gangaram Tambe et al ‘Optimization and Finite Element Analysis of Steering Knuckle’ Altair Technology conference 2013 India.
- [5] Kamlesh Lalasaheb Chavan,S R Deodas et al “Mass reduction for steering knuckle arm in a suspension system through topology optimization in CAE” International Journal of Scientific Research and Management Studies (IJSRMS) ISSN: 23493771 Volume 1 Issue 11, pg: 363-371
- [6] R.Prem Raj, K.Palpandi “Static Analysis and Topology Optimization of Steering Knuckle by Using Finite Element Method” International Journal of Innovative Research in Science, Engineering and Technology (An ISO 3297: 2007 Certified Organization) Vol. 4, Special Issue 13, December 2015
- [7] Mehrdad Zoroufi and Ali Fatemi “Fatigue Life Comparisons of Competing Manufacturing Processes: A Study of Steering Knuckle” 2003 SAE International 2004-01-0628.
- [8] Ameya Bhusari, Aditya Chavan “FEA & Optimization of steering knuckle of ATV”. Proceedings of 39th IRF International Conference, 4th October 2015, Pune, India, ISBN: 978-93-85832-12-3.
- [9] Sharad Kumar Chandrakar, Dheeraj Lal Soni and Shohel Gardia “FEA of A Steering Knuckle for Life Prediction” International Journal of Engineering Research and Technology. ISSN 0974-3154 Volume 6, Number 5 (2013), pp. 681-688 International Research Publication House <http://www.irphouse.com>
- [10] Purushottam Dumbre, A. K. Mishra, V. S. Aher “Structural Analysis of Steering Knuckle for Weight Reduction” International Journal of Emerging Technology and Advanced Engineering Website: [www.ijetae.com](http://www.ijetae.com) (ISSN 2250-2459, ISO 9001:2008 Certified Journal, Volume 4, Issue 6, June 2014)

