

Physico-Chemical Quality Assessment of Ground Water at Firozabad District

Abhinav Krishna Singh

M. Tech. Student

Department of Environmental Engineering

Bundelkhand Institute of Engineering and Technology, India

Abstract— Ground water is contaminated due to various human and industrial activities. This is a serious problem. So the analysis of water quality is very important to preserve the eco system. The assessment of the ground water quality was carried out in the different area of Firozabad District, U.P. (India) for the evaluation of the current status of physico-chemical contaminants and their sources in groundwater. Groundwater samples were obtained from seven different sampling stations in Firozabad District. Different parameters were analyzed that are pH, turbidity, TDS, total hardness, sulphate, fluoride, D.O., B.O. and chlorides. The sampling sites showed that the physicochemical parameters were within the water quality standards and the quality of water was found to be fit for drinking purposes.

Key words: Quality Assessment, Physico-Chemical Parameters of Ground Water Quality

I. INTRODUCTION

Water is the most important in shaping the land and regulating the climate. It is one of the most important compounds that profoundly influence life [1]. Groundwater is used for domestic and industrial water supply and also for irrigation purposes in all over the world. Discharge of urban, industrial and agricultural wastes have increased the quantum of various chemicals that enter the receiving water, which considerably alter their physico-chemical characteristics. Advancement in technology has boosted the human population and also enhanced water use and simultaneously put burden on the existing water bodies to fulfill the industrial, agricultural and domestic use of water; which is said to be unending process of development [2]. According to WHO organization, about 80% of all the diseases in human beings are caused by water [3].

Groundwater is generally considered safe for drinking purposes. Groundwater is also used for irrigation and industrial purposes. In many regions ground water sources are the single largest supply for serving drinking water to the community. Moreover, for many communities it may be the only economically viable option for drinking. Thus the availability of clean ground water is most essential, as it serves as the basic and critical component in different spheres of human life for a large number of habitations [4]. In the last few decades, there has been a tremendous increase in the demand for fresh water due to rapid growth of population and the accelerated pace of industrialization. A variety of land and water-based human activities are causing pollution of this precious resource. Its over-exploitation is causing aquifer contamination in certain instances [4].

The growing urbanization and industrialization and the consequent pollution of surface water sources, also increased the necessity of using groundwater for various domestic and industrial purposes [5]. With this background,

the present study was initiated to determine the concentration of contamination and the suitability of groundwater for drinking purpose. The present investigation deals with the study of physico-chemical parameters like temperature, pH, total hardness, total dissolved solids, chlorides, turbidity and alkalinity.

II. STUDY AREA

Firozabad is a city in India, in the state of Uttar Pradesh also known as City of Bangle. Firozabad is located in north central India, in Uttar Pradesh, 40 km from Agra and around 240 km away from Delhi, at the northern edge of the Deccan Plateau, at 27°09'N 78°24'E. It is located 164 meters (540 ft) above sea level. In geographical terms, the exact location of the city of Agra is 27.15°N 78.42°E. The city is located at an average altitude of 164 meters or 538 feet above the sea level. Since a few years, Firozabad has been suffering with a severe water pollution problem. The water has been polluted by the indiscriminate discharge of wastes by the industries, causing a literal water "crisis".

III. MATERIALS AND METHODS

A total of seven water samples were collected from different locations (Ram Nagar, sadar bazaar, Adarash Nagar, Mahadev Nagar, Abbas Nagar, Nalkoop Colony and Telephon Colony) in Firozabad, UP, India. All the samples were collected in sterilized bottles and were stored at 4°C till further investigation. The collected water samples were analyzed for various physico-chemical parameters.

The procedure for analysis was followed as per standard methods of analysis of water and wastewater. The parameters analyzed were temperature, pH, hardness, total dissolved solids (TDS), turbidity, alkalinity and chlorides. All the chemicals and reagents used for the study were of analytical grade and instruments were of limit of precise accuracy.

IV. RESULTS AND DISCUSSION

A. pH

pH of solution is taken as -ive logarithm of H² ions for many practical practices. Value range of pH from 7 to 14 is alkaline, from 0 to 7 is acidic and 7 is neutral. Mainly drinking water pH lies from 4.4 to 8.5. The pH scale commonly ranges from 0 to 14.

In the present study all the samples have pH values were between 7.45 – 8.5 and were within the prescribed limits.

B. Total Dissolved Solids

Difference of total solids and suspended solids is used to determine the filterable solids by the help of filtrate and

following the procedure as above. In water sample it can also be estimated from conductivity measurement. The acceptable and permissible limits As per IS: 10500-2012 is 500 and 2000 mg/l respectively.

The total dissolved solids (TDS) observed in the study area is found to be between 314 - 626 mg/L. Generally, the higher TDS causes gastro-intestinal irritation to the human beings, but the prolonged intake of water with the higher TDS can cause kidney stones and heart diseases [6].

C. Total Hardness

As per IS: 10500-2012 Desirable limit and Permissible limit for hardness is lies between 200 to 600 mg/l respectively. Hardness is the property of water which prevents the lather formation with soap and increases the boiling points of water. The total hardness is an important parameter of water quality assessment and conveys if the water can be used for domestic, industrial or agricultural purposes.

The hardness is caused due to the presence of excess of Ca, Mg and Fe salts. The maximum total hardness value was observed as 373 mg/L and minimum was 144 mg/L in the study area.

D. Turbidity

Suspension of particles in water interfering with passage of light is called turbidity. Turbidity is caused by wide variety of Suspended particles. The turbidity in the present area of study was found to be between 6- 9 NTU. It was well within the prescribed standards of 5- 10 NTU.

E. Chloride

All type of natural and raw water contains chlorides. It comes from activities carried out in agricultural area, Industrial activities and from chloride stones. Its concentration is high because of human activities. As per IS: 10500-2012 Desirable limit for chloride is 250 and 1000 mg/l in Permissible limit.

Chloride content of the ground water samples obtained from the study area was found to be in the range of 93.4 – 347.6 mg/L.

F. Sulphate

Sulphate was found in the range from 146 to 329 mg/L. The sulphate content in water is important in industrial supplies. High concentration of sulphate in water can cause malfunctioning of the elementary casual and shows cathartic effect on human beings.

G. Fluoride

Fluoride content of groundwater sample of the study areas ranges from 0.42 to 1.07 ppm. Maximum permissible limit is 1.0 ppm (WHO,). Small concentration of fluoride in drinking water has beneficial effect on human body. However concentration of fluoride below 0.5 ppm causes dental caries and higher concentration beyond 1.5 ppm causes dental and skeletal fluorides.

H. D.O. and B.O.D

Range of DO is 7.5 mg/L to 10.9 mg/L and BOD is 5 mg/L to 12.7 mg/L. Depletion of dissolved oxygen in water supplies can encourage microbial reduction of nitrate to nitrite and sulphate to sulphide giving odour problem. DO determine the quality of drinking water.

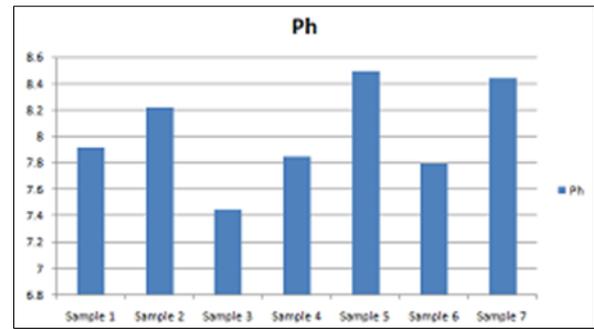


Fig. 1: Variation of pH

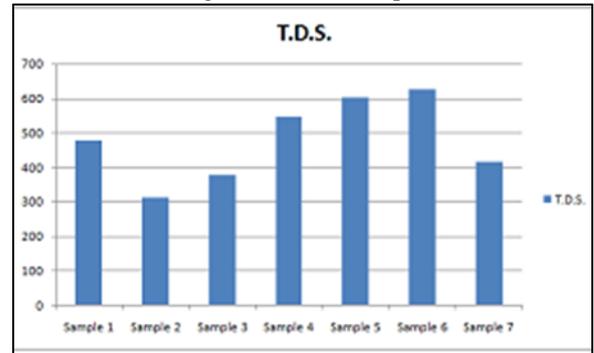


Fig. 2: Variation of T.D.S. (mg/L)

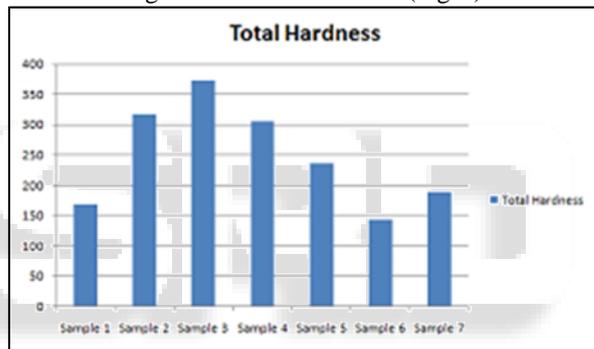


Fig. 3: Variation of Total Hardness (mg/L)

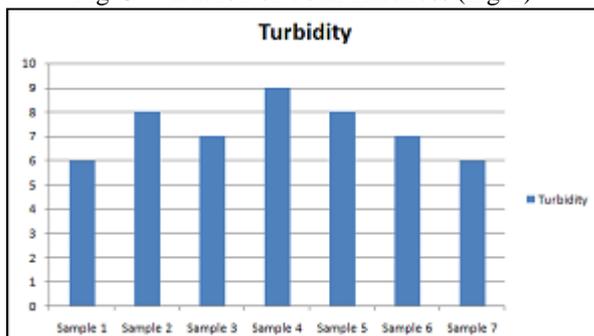


Fig. 4: Variation of Turbidity (mg/L)

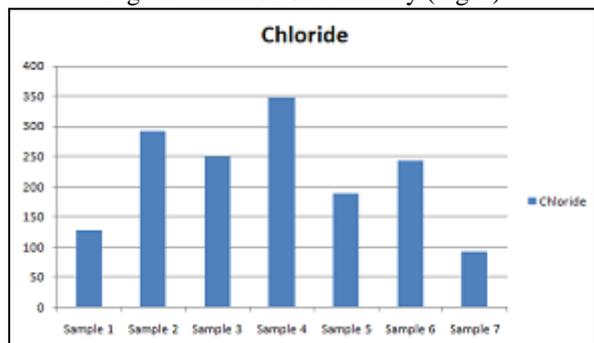


Fig. 5: Variation of Chloride (mg/L)

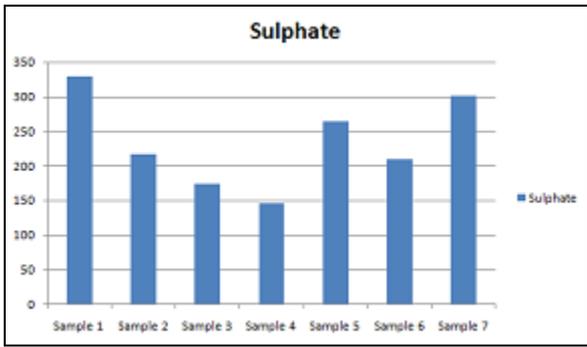


Fig. 6: Variation of sulphate (mg/L)

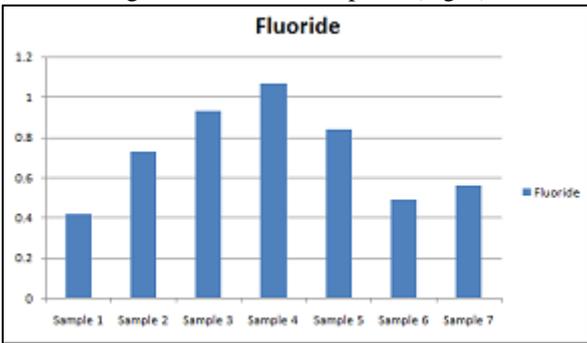


Fig. 7: Variation of Fluoride (mg/L)

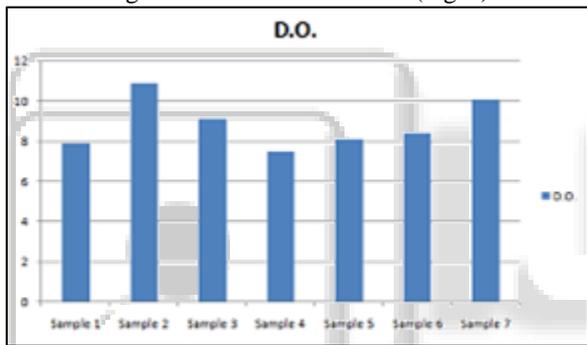


Fig. 8: Variation of D.O. (mg/L)

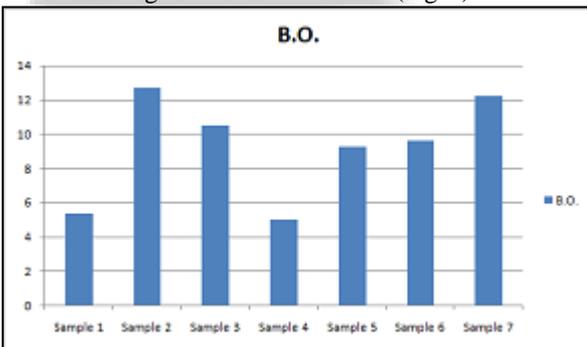


Fig. 9: Variation of B.O. (mg/L)

V. CONCLUSIONS

The groundwater quality analysis of Agra city is found to be fit for drinking purposes. The different values of the parameters under consideration were found to be- 6.94 for pH, 466.86 mg/L for total alkalinity, 7.4 NTU for turbidity, 451mg/L for total hardness, 6658mg/L for chlorides and 1286 mg/L for total dissolved solids. All the parameters were found to lie well within the prescribed standard limits.

REFERENCES

- [1] S.P. Gorde and M.V. Jadhav, Assessment of Water Quality Parameters: A Review, *Journal of Engineering Research and Applications*, 3(6), 2029-2035 (2013)
- [2] Agarwal, B. R., Mundhe, V., Hussain, S., Vidyapradhan, and Yusuf. S. 2012. Study of Physico-Chemical Parameters of Ground Water around Badnapur, Dist Jalna. *J Adv Sci Res*. 3(4): 94-95.
- [3] Kavitha R. and Elangovan K., Review article on Ground water quality characteristics at Erode district, (India), of *I.J.E.S.*, 1(2), (2010)
- [4] Tewari, A., Dubey, A., and Trivedi A. 2010. A study on physico-chemical characteristics of ground water quality. *J Chem Phar Res*. 2(2): 510518.
- [5] Abbulu, Y., and Rao, G. V. R. S. 2013. A Study on Physico-Chemical Characteristics of Groundwater in the Industrial Zone of Visakhapatnam, Andhra Pradesh. *American Journal of Engineering Research (AJER)*. 2(10): 112-116.
- [6] Garg, V. K., Suthar, S., Singh, S., Sheoran, A., Garima, M., and Jai, S. 2009. Drinking water quality in villages of southwestern Haryana, India: assessing human health risks associated with hydrochemistry. *Environ Geol*. 58: 1329 1340