

# Role of In-Vessel Composting in Stabilizing the Organic Solid Waste

Sivaguru P

Assistant Professor

Department of Civil Engineering

University College of Engineering, Pattukkottai, Rajamadam, Tamil Nadu, India

**Abstract**— This study was conducted to analyze the physico-chemical characteristics of organic matters separated from Municipal solid waste using a rotary drum reactor (RDR) process and static mechanically air blown reactor (ABR). The aeration method of the compost had great influence on the physico-chemical characteristics (temperature, moisture content, pH, organic content) of the compost. In the ABR the temperature was observed to be higher than the RDR which may be due to the daily rotation of the rotary drum as it dissipates the heat generated and interrupt the temperature rise. On analyzing results by ANOVA showed that decrease in the temperature varied significantly between the two reactor ( $p < 0.05$ ), but in both the process the temperature did not attain the thermophilic phase as it was below  $50^{\circ}\text{C}$ . The temperature control methods can be implemented to attain the required thermophilic phase. The present study helps to prove that the pH is not a key factor in the deciding the stability of the compost as it is same in both the cases throughout the experiment. The fertilizing index for TOC was calculated for the MSW compost taking the relative importance of the parameter into consideration. ADR and RDR which showed 4.43 and 5 for TOC. The results indicated that ADR had more advantage over the RDR. After composting the material for duration of 20 days the end product need further curing, hence these methods can be used for preliminary stabilization of compost.

**Keywords:** Municipal solid waste, temperature, moisture content, Stabilization

## I. INTRODUCTION

Municipal solid waste is a good and easily available raw material for the compost production at low cost. In a developing country like India, MSW has been always considered as a very rich source of organic compost having rich nutrient required for agriculture based country (Kalamdhad et al., 2009). The quantity of MSW has also increased tremendously with improved life style and social status of the populations in urban centers (Sharholly et al., 2007). The annual waste generation has been observed to increase in proportion to the rise in population and urbanization, and issues related to disposal have become challenging as more land is needed for the ultimate disposal of these solid wastes (Idris et al., 2004). The physico-chemical characteristics of the MSW of the cities in the north-eastern India having population  $< 0.1$  million and between 0.11-0.5 million, the C/N ratio was 18-37, the compostable fraction was 29-63%, and total recyclable were observed to be 13.68-36.64%. High calorific value on dry weight basis was observed to vary from 591 to 3766 kcal/kg (Sunil Kumar et al, 2009). Unscientific disposal causes an adverse impact on all the components of the environment and humane health (Rather, 2006). In the hilly region cities like in Itanagar, disposal of waste is carried out along the valleys ridges, polluting the land and underground water (Shin et al., 2001)

through leaching that carries both organic and inorganic contaminants (Bou-Zeid and El-Fadel., 2004). The estimated waste produced in Itanagar per capita per day is 0.456 kg thus the total waste generate per day according to the population of 2011 census is 317 tones which is much more than the expected municipal solid waste to be generated from a small town of 50000 population (Arunachal Pradesh Development Report, 2009). According to the studies and the survey carried it show (Department of Housing and Urban Development, Government of Arunachal Pradesh, Itanagar) that the MSW of the region have high degradable components value up to 65%, which is very high and can be positively tapped to convert it into compost using the aerobic method of composting. Aerobic composting is the decomposition of organic substrates in the presence of oxygen (Haug, 1993). But the quality of compost is important from maturity and stability viewpoint (Tiquia, SM., 2005) which unfortunately in most of compost factories, proper attention is not paid (Heydarzadeh et al., 2009). The application of unstable and immature compost would fix nitrogen in the soil and restrict plant growth by competing for oxygen in the rhizosphere and releasing toxic substances (Bernal et al., 2009). Stability is not only an important compost quality characteristic but it can also be used for process performance monitoring and comparative evaluation of different composting systems (Gomez, R.B., et al., 2006). The most common waste management strategy today is land filling (Hogg, D.H., et al., 2008) and it is expected to increase due to developing countries moving away from open dumping to engineered land fillings. But in recent years, there has been a movement to divert waste from landfills in order to reduce the negative environmental impact of landfills, such as leachate contamination posing a risk of groundwater contamination (Shin et al., 2001), GHG emissions and space limitation (Norbu et al., 2005). The in-vessel composter (Rotary drum type) has been considered as the suitable reactor for composting of MSW with different ratio of bulking agents (Daekeun Kim et al., 2008, M. Nikaeen et al., 2011, Ka-Man Lai et al., 2011 Kalamdhad et al., 2009). The performance of each compost formula is evaluated from its ability to reach optimum TOC, to maintain a pH between 6 and 8 during the active composting stage, to lose the most dry and wet mass during the maturation phase, to decompose to the extent that no substrate particles are visible and, once matured, to offer a final moisture content under 50%. The in-vessel method can be considered as solution and alternate to the waste disposal and management system catering to the increasing waste generated in the hilly region as the centralized system have failed. But very less work has been done on the use of such vessel in the tropical region which needs to be investigated thoroughly. The aim of this study was the characterization of different quality control parameters (Temperature, pH, moisture, TOC) of compost produced from MSW and also to work out the most appropriate methods of in-vessel

composting from ABR & RDR which can be adopted for the region.

## II. MATERIAL AND METHODS

### A. Experimental set-up and Design

The MSW is the raw material for the experiment which was collected from the NERIST campus. The waste collection routine of the campus was after every three days so the MSW collected was three days old. Since the waste was mixture of all types of waste segregation was done manually two times before loading. The segregated material was shredded manually to smaller pieces less than 2 cm. The pure form of organic waste from MSW is used in the study with no addition of bulking agent or bio-inoculums. In the ABR method of composting consist of a plastic cylindrical drum of 1m height and 0.5 cm diameter fitted with a leachate out let near the bottom of the drum. For the aeration perforated PVC pipes of diameter of 10cm are laid on the bottom of the drum .the perforated pipes was covered with a plastic mash to control the entry of the particles into the tiny holes. The air was blown into the system by air blower on a daily basis. The RDR composter used in this study is an especially designed aerobic type in-vessel composter. The main unit of the reactor i.e. diameter of 0.5m, length 1.20 m, the height is 1m above the ground level, made of 3mm thick sheet. The aeration of the reactor can be done manual by rotating and also mechanically by aeration which is done with the help of an air compressor. The reactor is supported on stand in both the ends attached with bearing to help rotation of the drum. There is an opening for the leachate collection. The axially running pipe in the drum not only supports the system but can be used in the leachate recirculation process and also for the aeration of the compost through it as it consist of small holes. The axial pipe again helps in the mixing of the compost as it is fitted with blade which helps in the further mixing of the compost. The surface of the composter is made water and rust proof by painting it with water resistant paints. 2.2 sample collection. The MSW is collected and grinded to achieve the required particles size ( 2-4cm ) for composting.

Characteristics	Organic waste
pH	5.5
Size in cm or mm	2-4 cm
Mass (kg)	86
Moisture content (%)	74
Total carbon content (%)	47.49
Total phosphorus	4.27
C/N	37.4
Total Nitrogen (%)	1.27

Table 1: The initial characteristics of the MSW.

The net initial weight of the MSW taken is 86 kg. 75% of the total volume of the in-vessel composter was filled for better and easy circulation of air and compost rotation. Five-hundred gram grab samples were collected manually from four different sources without disturbing the adjacent materials. Finally the entire grab samples were mixed thoroughly to make a homogenized sample. Triplicate homogenized samples were collected on the initial day and afterwards every third day for 27 days.

## III. RESULT AND DISCUSSION

### A. The effect of ABR and RDR on the moisture content of the compost

The moisture content between 40% to 60 % is considered optimum (Gajalakhshmi and Abbasi., 2008 ).The moisture content if exceed 60% it inhibit the aerobic process and leads to anaerobic process ( Das and Keener, 1997 ). Figure. 1 shows initial decrease of moisture content in the RDR process within 3 days which may be due excess evaporation of water content due to the daily turning of compost. The rewetting of the RDR compost was done to maintain the water content in the optimum range. Another reason for the sudden decrease of water content in RDR could be due to the draining out of the water through the leachate exit in the bottom of the in-vessel under the action of gravity. On the second week of composting the water content in ABR steadily decreased from 60% to 56 % which had inhibits the degradation process by clogging the voids ( Das and Keener., 1997 ) causing change in the pH of the compost as it decreases from 8.1 to 7.25 on the 9th day. Analyzing the results by ANOVA, the decrease in moisture content varied significantly between the 20 days of composting (  $P < 0.05$ ,  $F = 40.43$  ) for both the process. The composting period of the compost in ABR process was in the month of May which is rainy season so the moisture content may have been very much effected by the weather condition and also by the type of reactor used, as in the case of RDR which lead to the greater loss of moisture due to the daily rotation of the compost. So the moisture content of ABR was found to be more optimum for further curing of the compost.

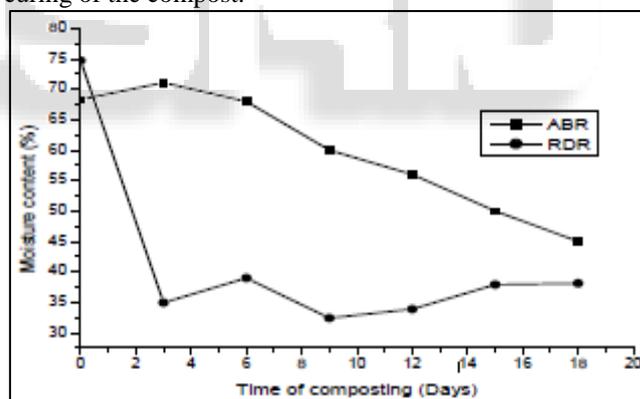


Fig. 1: Moisture content of composting material over time.

### B. The effect of ABR and RDR on TOC of the compost

The decrease in the TOC content during the composting period is given in Figure 3. The organic contents tends to decrease as the decomposition progresses. The major decrease in TOC is observed in ABR process which show more active microbial activity (Figure 3). The RDR showed poor rate of degradation of TOC. The slow rate of degradation can be correlated with the moisture content and the temperature of the compost (Liao et al., 1996) as the temperature was very low and the moisture content was relatively high ultimately leading to lowering of degradation rate. On analyzing with ANOVA the TOC of both the process showed significantly different (  $p < 0.05$ ,  $F = 27.68$  ). Thus it can be concluded that the rate of degradation is much higher in the ABR type which means it is a better decomposing

mechanism in these case. Considering the significant role of TOC in the composting process and the maximum score value of 5 has been conferred. The 'fertilizing index' values of the analyzed MSW compost for ABR and RDR are 4.43 & 5 respectively.

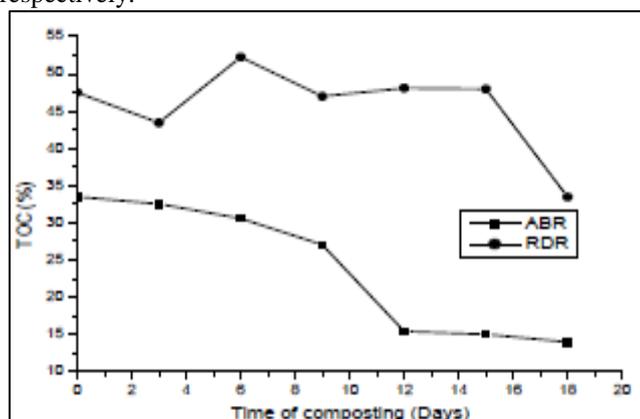


Fig. 2: TOC of composting material over time.

### C. The effect of ABR and RDR on Temperature of the compost

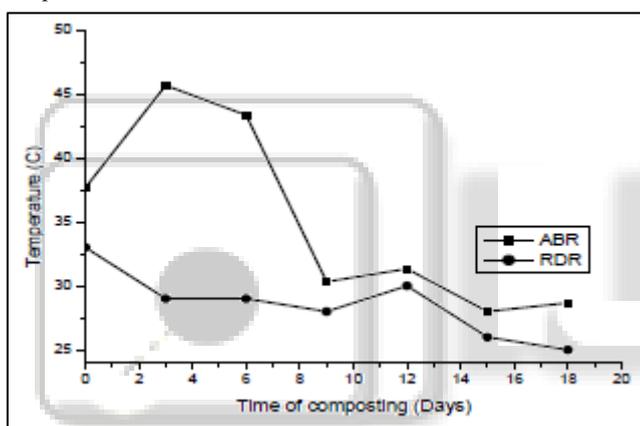


Fig. 3: Temperature of composting material over time

The temperature has been widely recognized as one of the most important parameters in the composting process (Bernal et al., 2009). The rise and fall in the compost can be strongly correlated with the rate of microbial activities (Tiquia et al., 1996). The optimum temperature is 40-65°C for composting (Bernal et al., 2009). The temperature is higher in ABR to RDR process. But both the cases could not attain the thermophilic phase which is above 50°C. The compost in RDR showed the lowest point of temperature i.e 23°C (Figure 1). The seasonal effect on the compost can be considered as one of the causes for the falling temperature, as composting was done in winter in the month of February. Another reason could be the material used in construction of the rotary drum reactor which is metal and a good conductor. The rise in the temperature of the compost in ABR caused greater decrease of TOC of the compost in the ABR process, as the microorganisms were active which also help in the stabilization of the compost. On analyzing the results with ANOVA the temperature in both the process showed significant difference ( $F = 81.87, P < 0.05$ ). Thus it can be concluded that the two methods have varying effect on the temperature of compost and the ADR process was found to be better of the two to attain the required optimum.

## IV. CONCLUSION

According to the experiment the ABR composting process is more efficient than the RDR for composting of MSW for duration of 20 days. The moisture content is well maintained in the ABR process as the final Moisture Content is 45% which is within the optimum range for composting. Hence it has been proved from the study that pH is not a key factor for deciding the stability status of compost as it is not significantly different in both the case. But the TOC has greater significance in the composting process. The main factor which can directly be related to decomposing is temperature and ABR showed better control over the temperature changes but the material used for the construction of the reactor should be investigated more as it may have some role in the change of temperature.

## REFERENCES

- [1] Ajay S. Kalamdhad, A.A Kazmi. 'Effect of turning frequency on compost stability and some chemical characteristics in a rotary drum composter.' *Chemosphere* 74., 1327- 1334 ( 2009 )
- [2] Sharholly,M., Ahmad, K., Vaishya, R.C., Gupta, R.D., (2007 ). 'Municipal Solid Waste Characteristics and Management in Allahabad, India' *Journal of waste management* 27 (4), 490-496 ( 2007 )
- [3] Idris, A., Inane, B., Hassan, M.N. 'Overview of waste disposal and landfills/dumps in Asian countries'. *Material Cycles and Waste Management* 16, 104–110 ( 2004 )
- [4] Sunil Kumar, J.K., Bhattacharyya., Vaidya ,A.N., Tapan Chakrabarti ., Sukumar Devotta ., Akolkar ,A.B . 'Assessment of the status of municipal solid waste management in metro cities, state capitals, class I cities, and class II towns in India: An insight'. *Waste management* 29, 883-895 ( 2009 )
- [5] Rathi, S. 'Alternative approaches for better municipal solid waste management in Mumbai, India'. *Journal of waste Management* .26 ( 10 ), 1192-1200 ( 2006 )
- [6] Shin, H.S., Han, S. K., Song, Y.C., Lee, C.Y. 'Performance of UASB reactor treating leachate from acidogenic fermenter in the two-phase anaerobic 5 digestion of food waste.' *Water Res*; 35, ( 2001 ) .
- [7] Bou-Zeid. E., El-Fadel, M., 'Parametric sensitivity analysis of leachate transport simulations at landfills'. *Waste Management*, 24, 681- 689 ( 2004 ) .
- [8] Arunachal Pradesh Development Report,( 2009 ) .
- [9] Department of Housing and Urban Development, Government of Arunachal Pradesh, Itanagar.
- [10] Haug, R.T., the Practical Handbook of Compost Engineering. CRC Publishers Ltd., Boca Raton, Florida, USA (1993).