

Optimization of Machining Parameters in Turning Operation of Bronze Metal for MRR & Hardness

Samreena Siddique

Research Scholar

Industrial & Production, (MED), Galaxy Global Group of Institutions Ambala, Dinarpur, India

Abstract— In most of the production industries mostly the number of components is manufactured by the Metal removal turning. Centre lathe is a general purpose machine which is mostly used in most of industries and large amount of work is carried on it. First pilot experiments were done on the work piece using random values and then from those pilot experiments the suitable values of these parameters were selected. On the basis of observations from the pilot experiments three values of Cutting speed 220,330,440, three values of feed 1, 1.5, 2 and three values of Depth of cut 1, 2, 3 were chosen. L9 orthogonal array performed using these values. It is concluded that for MRR be maximum factor Cutting speed has to be at high level 3, Feed has to be at high level 2 & D.O.C has to be at high level 3. It is concluded that for hardness to be maximum Cutting speed has to be at level 2, Feed has to be at high level 3 & D.O.C has to be at level 2.
Key words: Machining, Taguchi, Orthogonal Array, Signal to Noise Ratio

Aluminium alloy5083. The experimental values of surface finishing. The central composite face centered design (CCFD).

I. INTRODUCTION

Metal removal turning is a process in production industries for the manufacturing of components. The mostly used turning machines are centre lathe, turret lathe, and cnc machine. Centre lathe is a general purpose machine which is mostly used in most of industries. Mild steel is an unalloyed medium carbon steel which is used for manufacturing of shafts, studs, keys etc. Metal removal turning process is requiring to manufacturing them. Quality and quantity is also essential in industries. Therefore to optimize these parameters are necessary.

A. Controllable Cutting Factors In turning process

1) Cutting Speed/Spindle speed:

Speed always refers to the spindle and the work piece. When it is stated in revolutions per minute (rpm) it is their rotating speed. The important aspect for a particular turning operation is the speed at which the work piece material is moving past the cutting tool.

2) Feed:

Feed always refers to the cutting tool, and it is the rate at which the tool advances along its cutting path

3) Depth of Cut:

$$d_{cut} = D-d/2$$

Where, D,d are the initials & the final diameters of the workpiece..

Ozel and Karpat (2005) [1] considered for desire of surface disagreeableness and device flank wear by using the neural framework demonstrate stood out from the backslide show. Kohli and Dixit (2005) [2] proposed a methodology in light of the neural framework with the reviving of the winding vibration of the instrument holder as information. Abburi and Dixit (2006) [3] they made in perspective of data for predicting surface brutality in turning process system. M.P. Prabakaran and G.R. Kannan (2014)[4] This work with

II. DATA COLLECTION

The results of the test are shown in the observation table below. After this these observations are used for doing analysis and finding the results with the help of Minitab software. The Signal to noise ratio for all runs of MRR are shown in following table:-

Sr. No.	Cutting speed (rpm)	Feed	Depth of cut (mm)	MRR (mm3/s)	SNRA1
1	440	1	1	50.2	34.01889
2	440	1.5	2	125.0	41.93964
3	440	2	3	125.5	41.97132
4	220	1	2	35.6	31.03161
5	220	1.5	3	81.2	38.1939
6	220	2	1	36.4	31.21345
7	330	1	3	86.9	38.77843
8	330	1.5	1	37.0	31.36953
9	330	2	2	69.8	36.87348


Table 2.1: Calculation of MRR
Density 0.0078 gm/mm3

Level	Cutting speed(rpm)	Feed	Depth of cut(mm)
1	33.48	34.61	32.20
2	35.67	37.17	36.61
3	39.31	36.69	39.65
Delta	5.83	2.56	7.45
Rank	2	3	1


Table 2.2: MRR Response Table
For Signal to Noise Ratios, Larger is better

Level	Cutting speed(rpm)	Feed	Depth of cut(mm)
1	51.07	57.57	41.21
2	64.56	81.09	76.80
3	100.24	77.20	97.86
Delta	49.18	23.52	56.66
Rank	2	3	1

Table 2.3: MRR Response Table for Means

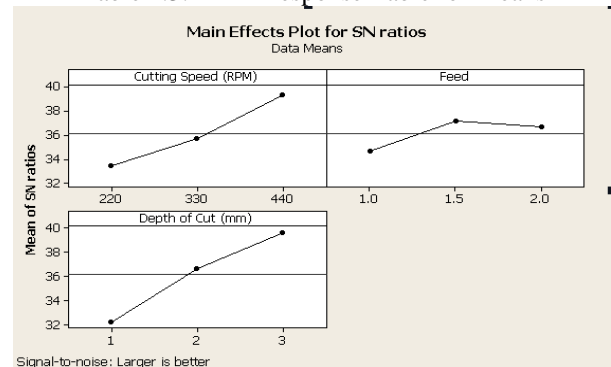

2.1 Main effects of Plot for S/N Ratio Material Removal Rate

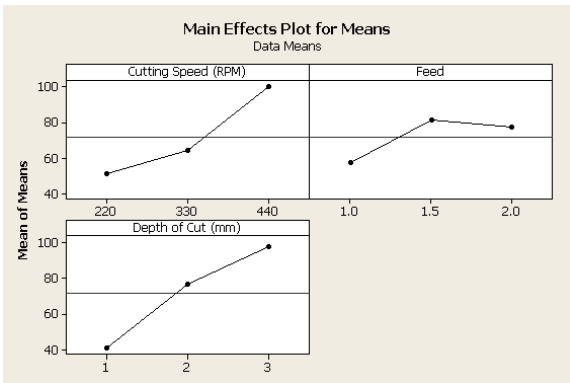

2.2 Main effects of Plot for Means Material Removal Rate

Source	D F	Seq SS	Adj SS	Adj MS	F	P
Cutting speed (rpm)	2	51.981	51.981	25.991	5.33	0.158
Feed	2	11.099	11.099	5.550	1.14	0.468
Depth of cut (mm)	2	84.165	84.165	42.083	8.63	0.104
Residual Error	2	9.755	9.755	4.877		
Total	8		157.000			

Table 2.4: Analysis of Variance of MRR for SN ratios

Source	D F	Seq SS	Adj SS	Adj MS	F	P
Cutting speed	2	3871.7	3871.7	1935.9	7.34	0.120
Feed	2	953.7	953.7	476.9	1.81	0.356
Depth of cut (mm)	2	4922.3	4922.3	2461.1	9.33	0.097
Residual Error	2	527.6	527.6	263.8		
Total	8		10275.3			

Table 2.5: Analysis of Variance of MRR for Means

The effect of each parameter on the MRR is plotted on the graph in form of lines from the figure main effects plot for S/N ratios it can be clearly seen that the MRR with an increase in the values of cutting speed, feed & slightly decrease with increasing depth of cut.

III. CALCULATION OF HARDNESS

The results of the test are shown in the observation table below. The Signal to noise ratio maximum is better for all runs of hardness are shown in following table:-

Sr. No	Cutting Speed (RPM)	Feed	Depth of Cut (mm)	Hardness	SNRA1	Mean 1
1	440	1	1	119	41.51094	119
2	440	1.5	2	125	41.9382	125
3	440	2	3	134	42.5421	134

4	220	1	2	162	44.1903	162
5	220	1.5	3	127	42.07607	127
6	220	2	1	115	41.21396	115
7	330	1	3	137	42.73441	137
8	330	1.5	1	143	43.10672	143
9	330	2	2	214	46.60828	214


Table 3.1: Calculation of Hardness

Level	RPM	Feed	D.O.C
1	134.7	139.3	125.7
2	164.7	131.7	167.0
3	126.0	154.3	132.7
Delta	38.7	22.7	41.3
Rank	2	3	1


Table 3.2 Hardness Response Table for Signal to Noise Ratios, Larger is better

Level	RPM	Feed	D.O.C
1	134.7	139.3	125.7
2	164.7	131.7	167.0
3	126.0	154.3	132.7
Delta	38.7	22.7	41.3
Rank	2	3	1

Table 3.3 Hardness Response Table for Means

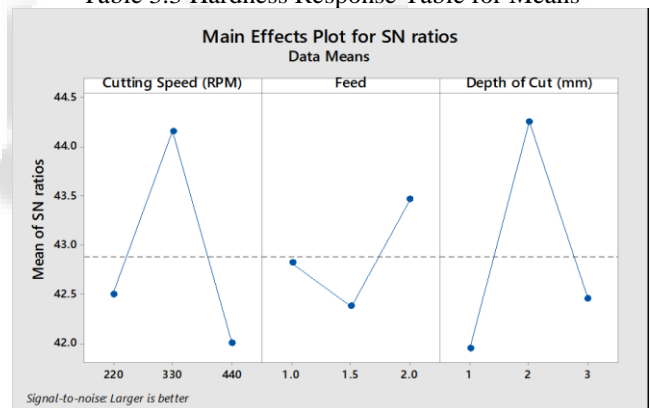

Graph 3.1 Main effects of Plot for Signal to noise Ratio of Hardness

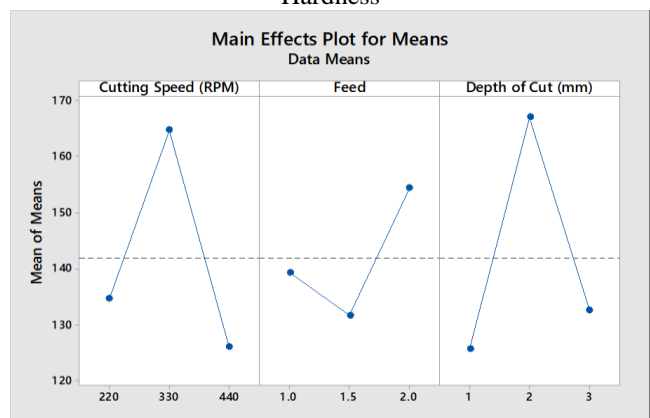

Graph 3.2 Main effects of Plot for Means of Hardness

The effect of each parameter on the hardness. is plotted on the graph in form of lines from the figure 4.5 main effects plot for S/N ratios it can be clearly seen that the

hardness is maximum at the second level of cutting speed, Depth of cut & at third level of feed.

Source	DF	Seq SS	Adj SS	Adj MS	F	P
Cutting Speed (RPM)	2	7.624	7.624	3.8121	2.00	0.333
Feed	2	1.774	1.774	0.8871	0.47	0.682
Depth of Cut (mm)	2	8.776	8.776	4.3880	2.30	0.303
Residual Error	2	3.813	3.813	1.9064		
Total		8		21.987		

Table 3.3 Analysis of Variance of Hardness for SN ratios

Source	D F	Seq SS	Adj SS	Adj MS	F	P
Cutting Speed(RPM)	2	2470.2	2470.2	1235.1	1.99	0.334
Feed	2	797.6	797.6	398.8	0.64	0.609
Depth of Cut (mm)	2	2936.2	2936.2	1468.1	2.36	0.297
Residual Error	2	1241.6	1241.6	620.8		
Total		8		7445.6		

Table 3.4 Analysis of Variance of Hardness for Means

IV. CONCLUSION

It is concluded that for MRR be maximum factor Cutting speed has to be at high level 3, Feed has to be at high level 2 & D.O.C has to be at high level 3. As shown in table below.

Table 5.1 Optimal combination for MRR

Physical Requirements		Optimal Combination	
	C.S	F	D.O.C
Maximum MRR	440	1.5	3
Level-3	Level-2	Level-3	

Table 5.1 Optimal combination for MRR

REFERENCES

- [1] Özel T. & Karpat Y., (2005), "Predictive modeling of surface roughness & tool wear in hard turning using regression & neural networks", International Journal of Machine Tools & Manufacture, Volume 45, pp.. 467–479
- [2] Kohli A. & Dixit U. S., (2005), "A neural-network-based methodology for the prediction of surface roughness in a turning process", International Journal of Advanced Manufacturing Technology, Volume 25, pp..118–129.
- [3] Abburi N. R. & Dixit U. S., (2006), "A knowledge-based system for the prediction of surface roughness in turning process" Robotics & Computer-Integrated Manufacturing, Volume 22, pp.. 363–372.
- [4] Prabakaran M.P, "Optimization Turning Process of Aluminium alloy 5083 using RSM" International Journal of Engineering Research & Technology", Volume 1, Number 4,pp.
- [5] Kumar A, Singh H, & Garg H.K (2016), "Optimisation of MRR and SR while turning of hybrid aluminium

Metal matrix composite on CNC Lathe using Response surface Methodology" in International Journal on Emerging Technologies Volume7 Number 1 pp. 117-125.

- [6] Guruvaiah Naidu and M.Gopi Srinivas(2017) " Analysis on the effect of Machining parameters on MRR using different coolants" in IJARIE vol. 2 Number 2 pp. 28-32.
- [7] Zhong Z. W., Khoo L. P. & Han S. T., (2006), "Prediction of surface roughness of turned surfaces using neural networks", International Journal of Advance Manufacturing Technology, Volume 28, pp.. 688–693.
- [8] Kumanan S., Saheb S. K. N. & Jesuthanam C. P., (2006), "Prediction of Machining Forces using Neural Networks Trained by a Genetic Algorithm", Institution of Engineers (India) Journal, Volume 87, pp.. 11-15.
- [9] Mahmoud E. A. E. & Abdelkarim H. A., (2006), "Optimum Cutting Parameters in Turning Operations using HSS Cutting Tool with 450 Approach Angle", Sudan Engineering Society Journal, Volume 53, Number 48, pp.. 25-30.
- [10] Doniavi A., Esk&erzade M. & Tahmsebian M., (2007), "Empirical Modeling of Surface Roughness in Turning Process of 1060 steel using Factorial Design Methodology", Journal of Applied Sciences, Volume 7, Number17, pp.. 2509-2513.
- [11] Kassab S. Y. & Khoshnaw Y. K., (2007), "The Effect of Cutting Tool Vibration on Surface Roughness of Work piece in Dry Turning Operation", Engineering & Technology, Volume 25, Number 7, pp.. 879-889