

# Design Optimization of Steering System For Bump And Brake Steer Using ADAMS

Girish R Rane<sup>1</sup> Professor. A. S. Dhekane<sup>2</sup>

<sup>1</sup>M. E. Student (Mechanical Design) <sup>2</sup>Assistant Professor

<sup>1,2</sup>D.Y. Patil College of Engineering, Akurdi, Pune

**Abstract**---Steering system is used to steer the front wheels in response to driver inputs in order to provide overall directional control of the vehicle. Thus, Steering system plays very important role in vehicle handling characteristics. Vehicle drift i.e. deviation of vehicle path from straight line during braking is related various parameters of Suspension, Steering, Tires, Wheel alignment etc. Analysis of steering characteristics such as Brake and bump steer which affects vehicle drift plays an important role.

Modeling and analysis of vehicle have been performed in a multi body dynamics environment based on actual vehicle data for Bump and Brake Steer. Different steering linkage concepts have been proposed to reduce brake and bump steer. Further optimization of hard points is done to reduce bump and brake steer within packaging constraints. It is found out that drag link ball joint position plays an important role in brake and bump steer.

## I. INTRODUCTION

Brake steer or Vehicle drift is a condition where a vehicle deviates to one side of the road during braking. This is not a violent condition but is an unfavorable handling characteristic. Vehicle Drift or pull creates driver discomfort, where a driver has to apply constant correcting steering wheel torque in order to maintain the desired path [1].

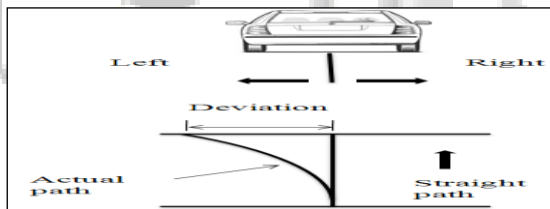


Fig.1: Vehicle path during Drift

When a vehicle travel across bump, spring deflects and the front axle and all attached parts move up and down. The path of motion of the axle and attached parts can be defined by treating the spring as a three link mechanism as described in SAE J788a Manual on Design and Application of Leaf Springs. The arc of travel of the steering arm ball and the center for this arc is as shown in Figure 2.

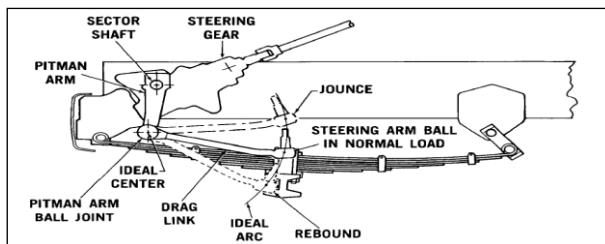


Fig. 2: Ideal location of Pitman arm ball joint [2]

If the pitman arm end of the drag link is not on the center of the arc of the steering arm ball travel then Bump

steer occurs [2]. Pitman arm drag link hard point, Deflection curve of springs affects the bump steer.

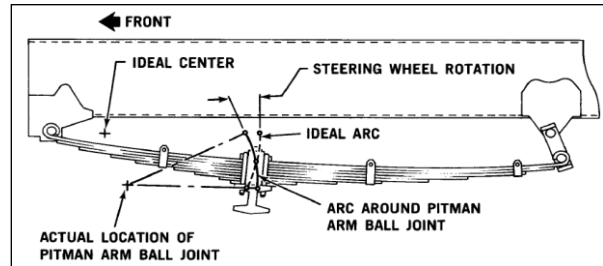


Fig. 3: Bump Steer Phenomena [2]

The location of the steering arm ball joint affects vehicle directional stability in severe brake applications. Spring rotates as braking torque is applied, thus any point on the un sprung components other than the centre of rotation is displaced. Spring stiffness, Steering arm drag link ball joint affects the Brake steer [2].

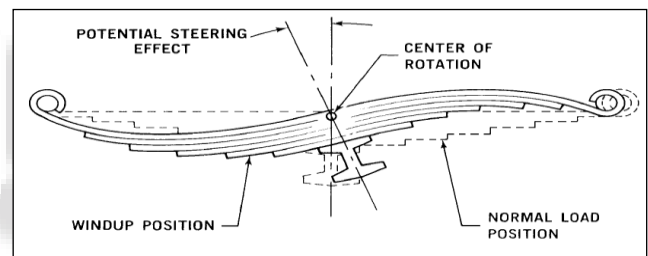


Fig. 4: Spring wind up - Brake Steer Phenomena [2]

Multi body dynamics software (MBDS) such as ADAMS can be used to simulate the vehicle, which saves time, cost to great extent. The vehicle under study is modeled in ADAMS and simulated for Bump & Brake steer. The steering system is then optimized to reduce same [1].

## II. MODELING AND ANALYSIS OF VEHICLE IN ADAMS

The Vehicle front end which consists of aggregates such as steering, suspension, tires, axles is modeled in ADAMS.

### A. The Brief Vehicle Specifications:

Table. 1: Brief Vehicle Specifications

Parameter	Details
GVW, Kg	4300
Front Axle Weight, Kg	2000
Front Track	1700
Wheel Base	2800
Steering	Recirculation ball type Inner: 36° , Outer:25°
Suspension	Leaf Spring suspension
Tire	All Terrain Tire
SLR	420
Axle	Rigid axle
Brakes	Drum Brakes at front and rear

**B. Hard Points Of Steering And Suspension System:** Hard points are Ball joint points where linkages such as drag link, tie rod are connected. Different hard points of vehicle under analysis are as shown in Figure 5.

Ball joints are spherical joints which allows movement in all three direction. If rigid joint used , it will cause failure.

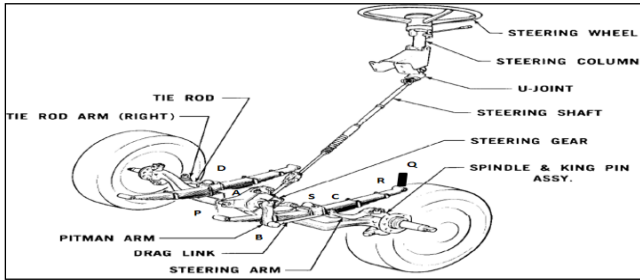


Fig. 5: Typical Steering system and hard points [2]

Hard point	Description
A	Pitman Arm Gear Box
B	Pitman Arm Drag Link BJ
C	Drag link Steering arm BJ
D	Tie Rod arm Tie rod BJ

Table. 2: Steering Hard points

**C. Modeling In ADAMS:** Multi body dynamics software (MBDS) such as ADAMS has the capability of performing simple or complex simulations and can be used for large displacement, static, kinematic and dynamic analyses of interconnected bodies.

Vehicle front end template has been created in ADAMS as shown in below figure. The template is modified as per vehicle under analysis by input of suspension hard points, steering and brake related information.

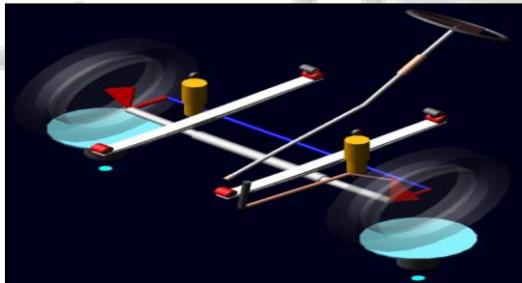


Fig. 6: ADAMS model for Bump and Brake steer calculations

The leaf spring is modeled as series of links connected by bushes having tensional stiffness such that whole leaf spring has desired vertical rate. Tensional preloads in bushes are required in addition to stiffness to achieve equilibrium in absence of any vertical force.

A Hotchkiss front suspension with pitman arm , drag link steering is modeled in ADAMS using hard points at flat spring condition and the leaf spring model. All necessary forces and constraints are incorporated to carry analysis.

Correlation of ADAMS analysis and experimental results has been achieved[5][6]

**D. Simulation Of Vehicle In Adams**

The vehicle is then simulated to find brake and bump steer. Typical bump and brake steer graph is as shown in below figure.

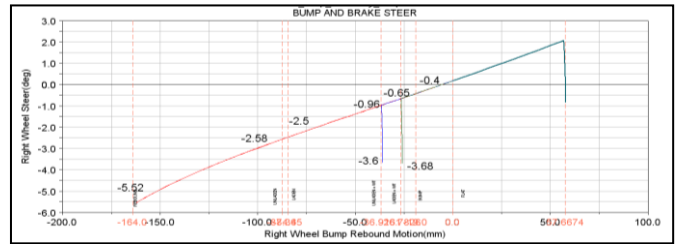


Fig. 7: Brake and Bump steer graph

From above figure, it is found out that brake steer value is -3 deg. Negative sign indicates left side which is too high and not acceptable. Hence new steering linkage concept needs to be prepared within available packaging constraints

**III. DEVELOPMENT OF CONCEPT TO REDUCE BUMP AND BRAKE STEER**

There are many parameters that affect brake and bump and brake steer. Only steering parameters i.e. hard points which affects are considered. The Steering arm, pitman arm hard point has been varied within vehicle packaging constraints.

**A. Packaging Constraints:** As Axle is under slung, it is not possible to take steering arm BJ down towards center of leaf spring.

All adjacent parts of steering linkages are carryover and developed. Major modification of same will lead to large development cost as well as time which were not accepted.

Considering these constraints different concepts has been proposed to reduce brake and bump steer and evaluated using Pugh concept selection technique as below

**B. Different Concepts Of Steering Linkages Proposed**

Concept 1: Datum concept

Concept 2: Stg Arm BJ down by 20mm, Pitman arm BJ to front by 20 mm

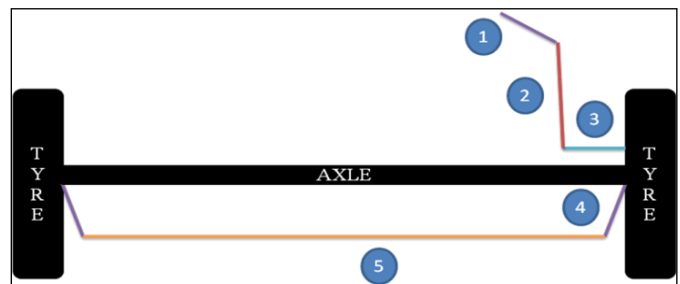


Fig. 8: Concept 1, 2 Steering Linkages

**C. Concept 3: Drag link on tie rod at front**

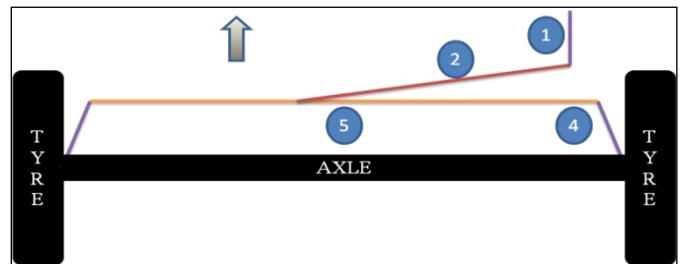


Fig. 9: Concept 3 Steering Linkages

D. Concept 4: Drag link on left stub axle, Tie rod behind axle

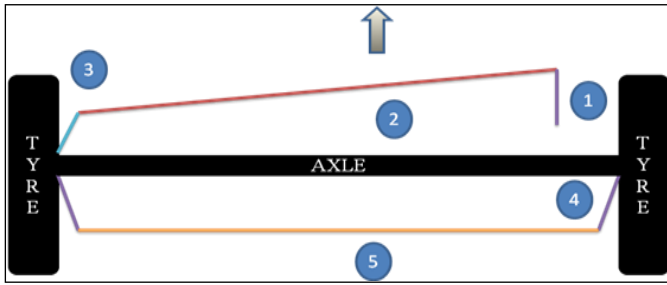


Fig. 10: Concept 4 Steering Linkages

Where,

- Pitman arm
- Drag Link
- Steering Arm
- Tie Rod Arm
- Tie Rod & arrow indicates vehicle front.

These different concepts are evaluated using Pugh concept selection matrix as shown in Table 3.

- "S" indicates it is same as in Datum concept.
- "+" indicates it is better than Datum concept.
- "-" indicates it is below the Datum concept.

The Concept 4 i.e. Drag link on left stub axle, Tie rod behind axle is better than other concepts hence it is selected for further optimization.

Table. 3: Pugh concept selection matrix

	Parameter	Concept 1	Concept 2	Concept 3	Concept 4
Criteria	Bump Steer	DATUM	S	+	+
	Brake Steer		S	+	+
	Packaging feasibility		-	+	+
	Carryover components		+	-	+
	Development time		S	-	S
	$\sum +$		1	3	4
	$\sum -$		1	2	0
	$\sum S$		3	0	1

#### IV. OPTIMISATION OF CONCEPT

Concept 4 hardpoints are optimised to reduce bump and brake steer. The hardpoints varied are Drag link pitman arm hardpoint, Drag link stub axle hardpoint. The Final optimised layout is shown in below figure

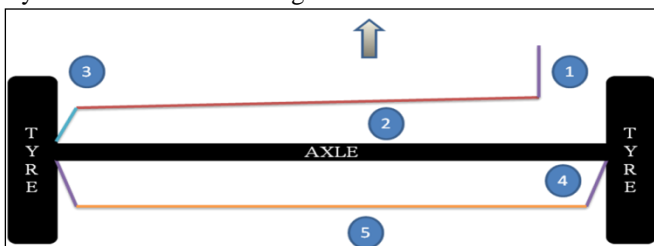


Fig. 11: Optimized Steering Linkages

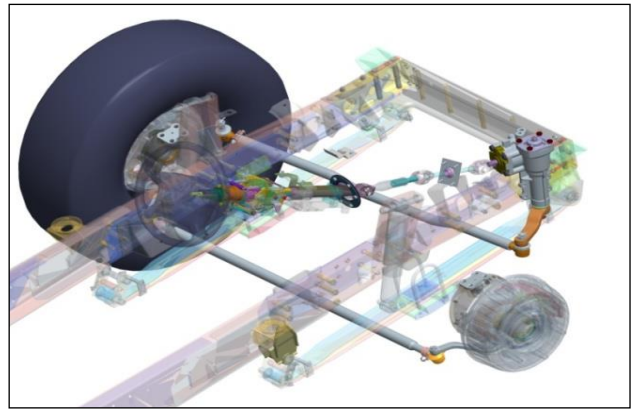


Fig. 12: Final optimized steering linkages CAD image  
Different iteration are performed on concept 4 to optimize are shown in table 4

Table. 4: Concept 4 optimization

		Iteration 1	Iteration 2	Iteration 3
Brake Steer	Deg	1.5	1	0.3
Bump steer	Min /mm	2.02	1.5	0.9

In above iterations below hard points are varied

- Gear Box pitman arm
- Pitman arm drag link
- Drag link stub axle

#### V. RESULT AND DISCUSSION

The Current vehicle has been modeled in ADAMS for Bump and Brake steer. The results obtained are similar to subjective assessment of actual vehicle i.e. vehicle drifting to left hand side.

As these values were high, which is safety concern, different concepts of steering linkages are prepared. Using Pugh concept selection matrix the best concept considering packaging constraints, maximum carryover parts, brake, bump steer values and development time is selected. The selected steering system linkage concept has been optimized by varying different drag link ball joints.

The comparison of existing and optimized steering system design is as below:

Table. 5: Results Comparison

Parameter	Unit	Existing system	New Optimized System
Brake Steer	deg	-3	0.3
Bump Steer	min/mm	2	0.9

#### VI. CONCLUSION

In present paper current vehicle steering system has been analyzed for bump & brake. The different hard points which affects bump and brake steer have been studied. It is found that steering arm and pitman drag link ball joint affects these parameters.

The vehicle has been simulated using MBD software ADAMS. To reduce brake and bump steer, different steering linkage concepts were worked out considering constraints. Among this, drag on left stub axle linkage is optimized for brake and bump steer.

It is found out that drag link ball joint position plays an important role in brake and bump steer.

#### VII. ACKNOWLEDGMENT

The author would like to thank Dr. D. R. Panchagade, Head of Department, Department of Mechanical Engineering, and Mr. Iqbal A. Khan, Assistant General Manager, Tata Motors for providing their expert.

#### REFERENCES

- [1] Nihal Mirza, Khalid Hussain,, Andrew J. Day, "Vehicle Handling and Stability investigations into causes of vehicle drift during Straight-line Braking" , Society of Automotive Engineers, Inc. 01-0797, 2006.
- [2] John W. Durstine," The Truck Steering System from Hand Wheel to Road Wheel", Society of Automotive Engineers, 1973.
- [3] R.P. Rajvardhan, S.R.Shankpal, S.M.Vijaykumar, " Effect of wheel geometry parameters on vehicle steering", SSA TECH Journal, Volume 9, Issue 2, pp.11-18, September 2010.
- [4] Mujahid Abdulrahim, "On the Dynamics of Automobile Drifting", Society of Automotive Engineers, Inc. 01-1019, 2006.
- [5] Vinay A. Upadhyay, K. Gopalakrishna, Ajay R. Kshirsagar, "A Simple , Cost Effective, Method of Evaluating Bump and Brake Steer, And Achieving correlation with ADAMS analysis", Society of Automotive Engineers, Inc, 01-0227, 2008.
- [6] Niklas Philipson, "Leaf Spring modeling", The Modelica Association", pp. 205-211, September 2006