

Brink Depth at Free Overfall in Open Channel Analysis: A Review

Vijendra Gupta¹ H.L Tiwari² S.K Mittal³

^{1,2,3}Department of Water Resource Engineering

Abstract— Many devices are fabricated to measure discharge in open channel. The flow over a free overfall (brink phenomenon) can be used as a device to measure discharge in open channels with known the end depth. This paper presents mathematical studies to evaluate efficiency of the brink as device of measuring flow rate in horizontal, mild and adverse open channels. The general mathematical model is derived using momentum, discharge and Froude number equations for horizontal, mild and adverse slopes open channels. A proposed mathematical model is calibrated by previous experimental data. Equation gives accurate discharge from known end water depth. The characteristics include, water depth over free overfall, critical and brink depth at lip of free overfall, the effect of bed roughness of free overfall on flow depths (normal, critical and brink depth) we obtained a relation between these depths and compared the those with results without roughness for the same discharges. A free overfall at the end of the channel is used as a flow measuring device. In this paper, theoretical end depth ratio (EDR) and end depth discharge (EDD) relationships have been studied. Despite the many theoretical studies carried out in channels having different cross-section shape, slope, and roughness, the problem of the free overfall as a flow measuring device has not been completely solved, and other studies are needed. A theoretically based end-depth-discharge relationship is obtained for both subcritical and supercritical flow in rectangular, triangular, circular, U-shape and trapezoidal channels. For each cross-section shape, discharges predicted using the theoretical relationship.

Key words: Brink Depth, Open Channel Analysis

I. INTRODUCTION

The brink depth is a hydraulic phenomenon it occurs when the canal drops suddenly, a free over fall is formed, since flow changes to sub critical flow can be used as a measuring device. At the end of channel variation in depth of flow, this variation in depth of flow dividing the gradual varied flow and rapid varied flow. The flow occurs due to gravitational force. In open channel flow free surface exposed to atmosphere and the sudden drop in the channel bed is called as free over fall. The flow depth at the free over fall is better known as brink depth or end depth. The gradual varied flow to rapid varied flow critical depth occurs due to appreciable curvature of stream line. Critical depth is more than that of brink depth. Estimation of discharge in river, stream, and open channel is measured by using a simple technique with brink depth and critical depth. End depth ratio is the ratio of brink depth or end depth and critical depth. Flow over a free over fall separates in the form of nappe at the sharp edge or drop and leads to rapidly varying flow with an appreciable curvature of streamlines, which causes a non-hydrostatic pressure distribution as shown in figure(1). Due to this reason the depth of flow at the brink is smaller than critical depth of flow. Applying the momentum equation between the critical section and section at free over fall, we have the following general equation for prismatic channels.

$$\gamma A_c Z_c - \gamma A_b Z_b - F_f = \rho Q (V_b - V_c)$$

Such over fall acts as a control section having unique relationship between brink depth or end depth and discharge and so used as a flow measuring device for different shapes of channel. The ratio of the end-depth to the critical depth known as End Depth Ratio (EDR) offers a possibility to predict the discharge and study of erosion near the brink of a free overfall. Several experimental and analytical works have been carried out till date on brink depth in different shapes of channel. No attempt was made by any investigator to analyze shear force variation at the free over fall section. Analytical attempts have been made by many investigators in the past for computation of end depth, among them most of the approaches are based on application of momentum equation with some assumptions and few are based on energy consideration and water surface profile at the end section. The numerical solution of two dimensional flows for an ideal fluid has also been attempted adopting various finite element techniques. To obtain three dimensional flow characteristics VOF (Volume of Fluid) model has also been applied. Knowledge of shear force is an important factor in the analysis of open channel flow due to the reasons, considering the effect of shear force while analyzing the free over fall section by momentum approach and For the design of channel in non-coherent alluvium and To prevent sediment laden flow in open channel by keeping the bed shear stress more than the critical shear stress

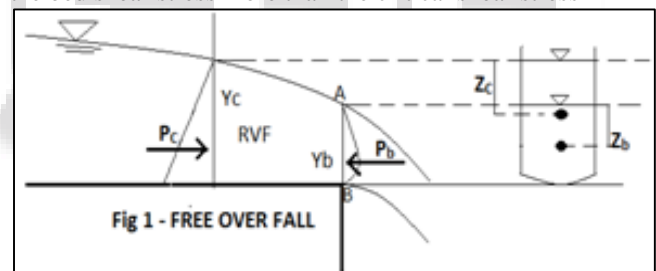


Fig. 1: Schematic Representation of Free over fall section

II. LITERATURE REVIEW

This part of the paper deals with a review of past research works in this field of brink depth by various investigators for better understanding of all its aspects. Research works highlighting main assumptions, principle, equations used and modeling techniques involved along with results and conclusion have been discussed in brief. This part is presented under following categories for different shapes of the channel.

A. Rectangular Channel

Hunter Rouse (1936) [34] was probably the first to recognize the interesting features of end depth at free over fall. Experiment was carried out in mild sloping rectangular channels for subcritical flow condition. He found the end depth was 0.715 times the corresponding critical depth for parallel flow condition if the pressure on the upper and lower nappe is atmospheric condition.

Delleur et al. (1956) [6] found the variation of end depth ratio (Y_e/Y_c) using the data of mild, adverse and steep

channels. He found that for rectangular channels the ratio (Y_e/Y_c) depends only upon relative slope (S_o/S_c) for both rough and smooth surface of the channel. He also reported variation of pressure coefficient as a function of relative slope as follows.

$$K_1=0.6 \text{ for } S_o/S_c < -5.0$$

$$K_1=0.3 + \{(1- S_o/S_c)\}/8 \text{ for } -5.0 < S_o/S_c < 1$$

$$K_1=0.30 \text{ for } 1 < S_o/S_c$$

Replogle (1962) [37] did his investigation for rectangular channel based on several theories used in Diskin's momentum equation (1961). And developed similar momentum equations and showed that the effect of energy correction factor (α), momentum correction factor (β) and small residual pressure. For rectangular free over fall, they carried out ratio of depth of flow (Y_e/Y_c) 1.396 and velocity (V_e/V_c) 0.716 respectively. Replogle reported that only the end pressure effectively contributes for the reduction of depth ratio from 1.5 for rectangular over fall to 1.428 as computed. The remaining data from measured value of EDR as 0.715 may be due to inaccurately obtaining of α values and deviation of actual pressure distribution from parabolic assumption. Rajaratnam and Muralidhar (1964) [38] conducted experiments on rectangular channels with smooth surface for different slope condition. From the experiment on horizontal channel, it was concluded that Y_e/Y_c and K_1 for different shapes of channel and for sloping channel as a function of relative slope S_o/S_c .

Anderson (1967) [49] developed a method for end depth determination with a distinct approach in relative equation of water surface profile in the open channel and in gravity fall region are separately derived and compared by the end section. For rectangular channel the equation derived was

$$4(Y_e/Y_c)^3 - 6(E/Y_c)(Y_e/Y_c)^2 + 3 = 0 \quad (2.1)$$

Where, E is the specific energy at the end section. For subcritical flow the above equation reduced to,

$$4(Y_e/Y_c)^3 - 9(Y_e/Y_c)^2 + 3 = 0 \quad (2.2)$$

Solution of equation (2.2) gives $Y_e/Y_c = 0.694$, the value was 3% less as compared to Rouse's value 0.715.

Strelkoff and Moyer (1970) [47] was found that the free over fall at rectangular channel is based according to potential theory. He carried out boundary value was formulated and derived as an integral equation and then done numerically. Results was same as the result of Hunter Rouse. The EDR for $Fr = 1$ was 0.672, that was comparably less than the corresponding experimental value.

Ferro (1992) [14] proposed free over fall as a discharge-measuring structure to define the relationship between critical depth and end depth. The experiment on free over fall in a rectangular channel having wide range of channel width values. The computation of data showed that, for practical application, the relationship between Y_e and pressure coefficient (K) is not dependent of channel width. By carrying out this relationship, 89.9% of the calculated discharges are within $\pm 5\%$ of the experiment.

Rai (1993) [42] work on studied of problem of the end depth in rectangular channel and for unconfined nappe; he was found the average depth ratio (Y_e/Y_c) as 0.712. For sloping channel the end depth ratio was found to be a function of relative slope (S_o/S_c). For relative slope of +5.0, the end depth ratio was found to be 76.14% of end depth ratio of horizontal rectangular channel. He found that the

apparent critical section was found to lie at a distance of $3.27Y_c$ upstream of end section for horizontal channel and is a function of slope S_o . Tiwari (1994) [52] evaluated an expression of free over fall at rectangular channel by using momentum approach and used computer software. Effect of weight of control volume on sloping floor was considered. For rectangular channel (bed width B), the equation derived by him was

$$K_1(Y_e/Y_c)^3 - 3(Y_e/Y_c) + 2 = 0 \quad (3)$$

In horizontal channel and zero end pressure, end depth ratio was found to be 0.66667 and it was similar to given by Diskin. In sloping channels, EDR was found to be a function of relative slope. Outcomes of the result come from theoretical software analysis agreed well with the experimental data.

Khan and Steffler (1996) [23] developed a model for horizontal rectangular free over fall applying vertically averaged and momentum equations. A linear longitudinal velocity distribution and quadratic vertical velocity and pressure distributions, was applying for modeling flow in the vicinity of horizontal rectangular free overfall with smooth and rough beds and sharp-crested weirs with sloping upstream faces. These equations were modeled using a hybrid Petrov-Galerkin and Bubnov-Galerkin finite-element scheme. In rectangular free overfalls, the water surface profiles upstream and the free jet trajectory confirmed well with the obtained data. The obtained vertical velocity and pressure distributions at the brink and upstream of the overfall were developed to be in good agreement with the obtained data. While the measured longitudinal velocity distributions equated well with a two-dimensional potential flow model. The calculated results for sharp-crested weirs with sloping upstream faces agree well with the obtained data for an upstream weir slope of up to 270 with the horizontal. In an upstream slope of 450 and steeper and for a greater weir height the foresee water surface upstream of a weir shows numerical instability.

Mittal and Desmukh (1998) [26] created in FORTAN-77 computer language for flow computation at rectangular free over fall. They created a very helpful calibration curve for rectangular free over fall was developed by them. The curves were drawn in between the discharge and brink depth for different values of K (0, 0.3, 0.6 and 0.9). These curves, help in finding the discharge in an over fall can be calculated immediately if we know the brink depth. The major equation derived for the curve and for rectangular over fall was as follows

$$Y_R = 0.670 + 0.047K + 0.160K^2 \quad (4.1)$$

$$q^* = 1.831 - 0.314K + 0.320K^2 \quad (4.2)$$

Where Q^* ($^3q^*$) is the non dimensional discharge. Discharge per unit width was given as (4.3)

Except for higher values of K, the error involved by these equations were within 1 %.

Davis et al. (1998) [5] performed out an experimental study regarding free overfall from a rectangular channel for wide range of slopes and bed roughness. The experiments were carried out in a metallic rectangular flume having glass sides having dimensions, 305 mm in width and 3.7 m in length. It had a painted steel bed with an n of 0.0099. The data shows that the relationship between the upstream critical depth and brink depth was found to be affected by both slope and channel-bed

roughness, it was also found that the roughness was having a greater effect at steeper slopes. As a result of this two empirical equations were put forward for calculating this relationship, the first one needing only the data of channel slope and the second one needing both channel slope and roughness data.

$$Y_e/Y_c = 134.84S_0^2 - 12.66S_0 + 0.778 \quad (5.1)$$

$$Y_e/Y_c = 0.846 - 0.219(\sqrt{S_0/n}) \quad (5.2)$$

Davis found out that, his first equation was correct in estimating 76.7% of the discharges to within 10% but was much more useful for estimation of discharge if bed roughness is not known. The second relationship estimated 90% of the discharges to within 10%.

Dey (2000) [10] developed a theoretical model to calculate the end depth of a free over fall in steeply sloping rough rectangular channels based on momentum approach. Curvature of streamlines at the free surface was essential in creating the differential equation for the flow profile upstream of the free over fall of a wide rectangular channel. To solve the equations simultaneously, an auto recursive method was developed. Estimation of discharge from end depth and Nikuradse equivalent sand roughness was also done. Some results were obtained well within the experimental observations except for some higher roughness.

Ahmed (2003) [3] created another a quasi-theoretical method for calculating end depth ratio and end depth discharge relationship in terms of pressure coefficient in sub critical and super critical flows for rectangular channel. The main equations developed by him was

$$EDR = Y_e/Y_c = 3F_1/[2(1-C_p)+F_1^2]^{3/2} - [F_1^2 - 2C_p]^{3/2} \quad (6.1)$$

The brink pressure coefficient K was calculated from experimental data and the estimated values of EDR and EDD were cross checked with experimental data. It was found that for subcritical flows the value of EDR was 0.78 for a confined nappe and 0.758 for an unconfined nappe. Also it was observed that for supercritical flows EDR decreases with increase in relative slope (S_0/S_c) as well as Y_c/B . The predicted EDR in supercritical flow was in compliance with obtained experimental data.

Guo (2005) [17] created a numerical iterative method for calculating free rectangular over fall in a physical plane depending on analytical function boundary value theory and substitution variables. Water surface profile, pressure distribution and EDR for both smooth and rough channel with a wide range of slope and upstream Froude number were calculated with this method. The computed values were well fitted with experimental data. However the chief advantage of this method was it was very quick and flexible to be used on curved bed as well.

Beirami et al. (2006) [4] developed his own theoretical model depends on the free vortex theorem and the momentum equation was applied at the brink of free over falls in channels of different cross sections having sub-critical flow. The model was helpful to complete the pressure head distribution, the pressure coefficient, the end depth ratio (EDR), and flow discharge at the brink. Using available experimental and theoretical results of other investigators the proposed method was examined. In rectangular channels, the proposed method gave the values of 0.7016 and 0.3033 for EDR and K, respectively. According to the values of EDR reported by other

investigators had a slight difference 1% to 2% with the proposed method. The differences between the other formulas with the proposed method are about 1.5% to 3%.

Guo et al. (2008) [18] carried out both experimental and turbulent numerical modeling for the study of free over fall in rectangular channel with strip roughness. The channel was 0.4m wide, 0.4m depth and 8.4m long with plywood bottom and sides. An array of strip roughness was placed on the channel bottom had a square cross section of 6×10^{-3} m high and wide and transversely fixed. A wide range of model parameters like bed roughness, channel slope and upstream Froude number was investigated. The upstream water surface profile, velocity in the cavity between two strips and end depth were simulated, measured and discussed for various input conditions. The result showed that for a given dimension of bed roughness relative spacing of roughness affected flow condition, which decreased with increase in λ/d value in this study. For small spacing, eddies reduced the downstream discharge while such geometric effect was negligible while λ/d value was increased up to a certain range.

Tigrek et al. (2008) [53] carried out an experimental study to get a relationship between brink depth and discharge at a rectangular free over fall. A series of experiments were conducted in a tilting rectangular flume of 1m width and 12.06m length for both sub critical and super critical flow conditions. The equation derived for end depth ratio and discharge were as follows. For end depth ratio and discharge were as follows.

$$Y_e / Y_c = 0.683 \quad \text{for } F_r \leq 1 \text{ with rms} = 0.0341 \quad (7.1)$$

$$Y_e / Y_c = 0.773 - 0.018(\sqrt{S_0/n}) \quad \text{for } F_r > 1 \text{ with rms} = 0.0708 \quad (7.2)$$

$$q = C_d Y_e^{3/2} \quad (7.3)$$

Where $C_d = 5.55$ for $F_r \leq 1$

$$C_d = [1 / \{(0.361 - (0.00841(\sqrt{S_0/n}))\}]^{3/2}$$

Validity of this explicit discharge brink depth equation was checked and the result agreed well with predicted values. Mohammed et al. (2011) [29] carried out an experimental study to determine the effect of gravel roughness and channel slope on rectangular free over fall. The experiments were conducted in a metal rectangular flume with glass sides, 300mm in width and 10m in length. The flume was set to slopes of 0, 1/200, 1/100 respectively. For various types of roughness the end depth ratio was expressed as

$$Y_e/Y_c = C_1 + C_2[(k/Y_c)S_0]^{0.5} \quad (8)$$

C_1 and C_2 were different for different gravel roughness distribution on bed and slope. It was found that the ratio of Y_e / Y_c for full bed of dimension 20cm x 30 cm having roughness of two rows of 6 mm gravel had more effect at steeper slopes. Six relationships were obtained to predict Y_e / Y_c . All these relationships were compared with Davis et al. (1998) and Tigrek et al.(2008) to ensure their utility and validity.

Amirabdollahian et al. (2012) [2] simulated flow over a free over fall in rectangular channel based on potential flow theory and Schwarz- Christoffel transformation. The flow had been assumed to be inviscid and ir-rotational. Considering the straight line segments simulation of the free over fall flow course a complex function was achieved which transfer the vertical and horizontal lines into a complex plane of stream function and

velocity potential respectively. Based on determining the detailed flow pattern the free surface nappe formula had been derived. Results showed that use of conformal mapping was well agreed with results.

Mohammed (2013) [30] studied the effect of slopes and bed rough distribution on the free over fall in rectangular channel. The rectangular flume was 0.3m wide 0.45m deep and 10m long with glass sides. Bed roughness was made of wood 1cm diameter and 1cm height allocated in three different cases: two, three and zigzag rows. Three empirical discharge equations for free overfall depending on brink depth and slope were obtained. Three rows bed roughness having greater effect on these relationships at steeper slopes. The average values of Y_c/Y_e at smooth bed was greater by 4% with respect to that for bed rough at two rows, by 19% with respect to that for bed rough at zigzag rows and by 24% with respect to that for bed rough at three rows, so that values for three rows rough and horizontal channel was greater by 4% with respect to that for channel slope at 1/200 and by 14% with respect to that for channel slope at 1/100.

Hou et al. (2013) [20] investigated the free overfall in open channels with even and uneven bottom by using the mesh less smoothed particle hydrodynamics (SPH) method. For the even bottom case, subcritical, critical and supercritical flows were simulated. For the uneven bottom case, supercritical flows with different Froude numbers were considered. The free surface profiles were predicted and compared with theoretical and experimental data and it agreed well.

B. Trapezoidal Channel

Diskin (1961) [7] developed equations for the computation of end depth in exponential and trapezoidal channel using momentum principle. He assumed pressure at the end section to be zero. The basic equation developed by him as follows.

$$A_c Y_c = (Q^2/g) [(1/A_e) - (1/A_c)] \quad (9.1)$$

Solving the above equation the above equation, relationship obtained by Diskin for horizontal trapezoidal channel:

$$(X_c + X_c^2)/(X_e + X_e^2) = (10X_c^2 + 20X_c + 9)/[6(1 + X_c^2)] \quad (9.2)$$

In which $X_c = mY_c / B$ and $X_e = mY_e / B$ with m and B as side slope and width respectively. He also suggested a simplified equation for end depth in non-dimensional form as

$$X_e = 1/2 [-1 + (1 + 4Z_c)^{1/2}], \quad \text{in which } Z_c = [6X_c(1 + X_c^3)] / (9 + 20X_c + 10X_c^2) \quad (9.3)$$

Rajaratnam (1962) [36] developed equations for exponential and trapezoidal channels with non-zero pressure at the end section by momentum principle. For trapezoidal channel,

$$X_e^5 + X_e^4 + X_e^3 - [(\phi_1(X_c) + 1)/(K_1\phi_2(X_c))] X_e^2 - [(\phi_1(X_c) + 1)/(K_1\phi_2(X_c))] X_e + [(\phi_3(X_c))/(K_1\phi_2(X_c))] = 0, \quad (9.4)$$

where

$$\begin{aligned} \phi_1(X_c) &= (3 + 2X_c) / [6(1 + X_c)] \\ \phi_2(X_c) &= (3 + 2X_c) / [(X_c + X_c^2) \phi(1 + X_c) X_c] \\ \phi_3(X_c) &= (X_c + X_c^2) \end{aligned}$$

He also proposed some correction in Diskin's method.

Rajaratnam and Thiruvengadam gave a two parameter solution for solution of critical depth in trapezoidal channel as

$$Qm^{3/2} / (b/2)^{5/2} = 4 [(4X_c^2 + 4X_c)^{3/2} / (1 + 2X_c)^{1/2}] \quad (9.5)$$

LHS of above equation is also a function of X_e since X_e has been shown to be a function of X_c . They gave a graph between functional relationship of Q and X_e .

Rajaratnam and Muralidhar (1970) [40] performed experiments on over falls in smooth trapezoidal channel and analyzed the data as obtained by Diskin. They showed the relationship of end depth ratio as follows.

$$Y_e/Y_c = f(S_o/S_c, mY_c/B) \quad (10)$$

Subramanya and Murthy (1987) [48] used Anderson's approach to solve end depth problem in trapezoidal channel based on energy consideration and continuity of water surface profile at the brink. Water surface profile was derived separately for the channel flow and gravity over fall and finally equated at the end section to obtain an expression for end depth. Its main advantage was it was free of any experimentally derived coefficient. He derived an expression for horizontal frictionless trapezoidal channel carrying a sub critical flow as

$$\epsilon(\Phi) - 4\Gamma - 3f(\phi, \Gamma) = 0 \quad (11.1)$$

$$\text{Where } \epsilon(\Phi) = 1 + 1/2 [(1 + \phi) / (1 + 2\phi)] \quad (11.2)$$

$$\text{and } f(\phi, \Gamma) = (1 + \phi)^3 / [(1 + \phi\Gamma)^2 \Gamma^2 (1 + 2\phi)] \quad (11.3)$$

Results obtained from these equations vary +- 2% experimental values.

Keller and Fong (1989) [22] solved equation for trapezoidal channel based on momentum approach and assuming non-zero pressure at the end section. They also conducted an experimental analysis on trapezoidal over fall. The predicted relationship of brink depth and discharge was compared with experimental data. The major equation developed was

$$10X_c^4 + 20X_c^3 + 9X_c^2 - (6/G_1) [(X_c^3 + 3X_c^4 + 3X_c^5 + X_c^6)] - K_1 G_1 G$$

$$2(1 + 2X_c) = 0 \quad (12.1)$$

$$\text{In which } G_1 = X_e + X_e^2 \quad (12.2)$$

$$G_2 = [(3 + 2X_e) X_e] / (1 + X_e) \quad (12.3)$$

The result showed that 40% of predictions were +- 2% of measured flow rates and 80% were within +- 3%. A calibration chart, applicable to any mild slope trapezoidal channel, was developed theoretically and checked against the data from the present study and data from previous studies.

Gupta et al. (1993) [16] carried out an experimental study on a smooth trapezoidal free over fall for positive, negative and zero slopes. They provided a calibration curve using dimensionless parameters $[Qm^{1.5}/(\sqrt{g}B^{2.5})]$ and $[e^{5.5(S)}mY_e/B]$ for the prediction of discharge (Q) with the help of known end-depth (Y_e) and vice versa. The curve best fitted to the data, with a correlation coefficient (CR) equal to 0.99753. It was also observed that for horizontal channels, the theoretical value of the constant (i.e., slope) in the equation of the straight line $X_e = (\text{constant})(X_c)$ was greater than that obtained from the present investigation based on experimental data, where $X_e = mY_e/B$ and $X_c = mY_c/B$.

Tiwari (1994) [52] developed an expression of free over fall at trapezoidal channel by applying momentum approach and developed computer software. Effect of weight of control volume on sloping floor was included in the derivation. For trapezoidal channel (bed width B and side slope 1 in m), the equation developed by him was same as that obtained by Diskin for horizontal trapezoidal channel

with $K = 0$. For sloping channels, EDR was found to be a function of relative slope.

Litsa and Evangelos (1995) [24] investigated the flow over a fall in a trapezoidal channel by simulating that over a sharp-crested weir, taking into account the streamline inclination and curvature at the brink. A general end-depth-discharge relationship, for both subcritical and supercritical flow was obtained. Discharges obtained from this relationship were compared with experimental data and with those obtained from other theoretical methods. The surface profiles for the zone between the brink and an upstream section with hydrostatic pressure distribution were also investigated.

Ramamurthy et al. (2004) [43] formulated an accurate relationship between end depth and discharge rate for a horizontal trapezoidal free over fall. They included the effects of non-uniform velocity distribution and curved streamline at the free over fall to obtain a relationship between end depth and discharge. The measured static pressure head distribution agreed well with the predicted value for the end section. The pressure force at the end section was obtained from the measured static pressure distribution at that section.

Ramamurthy et al. (2006) [44] developed a VOF (Volume of Fluid) model to simulate the flow over a free over fall in trapezoidal channels. The model was used to predict pressure head distribution, velocity distribution and water surface profiles for the over fall. The predicted values were checked using existing experimental data.

Pal and Goel (2007) [33] applied modeling technique (radial based kernel and polynomial kernel) based on support vector machines to determine discharge and end-depth of a free over fall occurring over a smooth trapezoidal channel with horizontal and sloped bottom. The predicted values of both discharge and end depth were compared with previously derived empirical relations and also with a back propagation neural network model. In case of discharge prediction, correlation coefficient was more than 0.995 with all three different slopes, while it was more than 0.996 in predicting the end depth using radial based kernel of support vector machines algorithm. A smaller computational time was an advantage of using support vector machines.

Vatankhah (2013) [54] presented a theoretical end depth– discharge (EDD) relationship for free over fall (end section) in a horizontal trapezoidal shaped open channel. Two direct discharge equations in terms of end depth for subcritical flow were proposed by simulating free overfall as a weir without crest. The calculated discharges, using the proposed EDD relationships agreed well with the experimental data.

C. Circular Channel

Replogle (1962) [37] carried out his investigation for circular channel based on several assumptions used in Diskin's momentum equation (1961). He developed similar momentum equations and showed that the effect of energy correction factor (α), momentum correction factor (β) and residual pressure is small. However they may account for approximately 5% difference of actual discharge and discharge given by Diskin momentum equation.

Smith (1962) [46] studied end depth problem in circular channels by assuming unit momentum coefficient

and zero pressure at the end section to get an exact solution for the flow area (A_d) at a vertical section beyond the end. From his experiments, he found actual area was always greater than computed area. He also gave a dimensionless curve giving the variation of (D_e/D) with ($Q/D^{5/2}$) for calculation of discharge for a freely discharging circular pipe of any size with upper limit $Q/D^{5/2}$ as 3.7.

Diskin (1963) [8] proposed an equation for circular channels having a logarithm relationship between $Q/(gD^5)^{1/2}$ and Y_e/D as

$$Q/(gD^5)^{1/2} = 1.82 (Y_e/D)^{1.96} \quad (13)$$

The values obtained from the above equation vary 0.5% from the value obtained from momentum equation for the range $0.05 < Y_e/D < 0.75$.

Rajaratnam and Muralidhar (1964) [39] investigated on end depth in circular channel based on momentum approach. Based on experimental data they gave an equation for discharge in terms of end depth as

$$Q/(gD^5)^{1/2} = 1.54 (Y_e^{1.84}/D) \quad (14)$$

When the channel was sloping Y_e/Y_c was found to be a function of S_o/S_c . The value of Y_e/Y_c decreased from 0.75 to 0.487 as S_o/S_c was increased from -4.0 to 8.0.

Subramanya and Niraj Kumar (1993) [50] gave an expression for end depth at free over fall of a horizontal circular channel based on energy consideration and continuity of water surface profile at the end section. The major expression given by him for horizontal frictionless circular channel having sub critical flow was

$$6 F (Y_c/D) - 4\eta - 3 f (\eta, Y_c/D) = 0 \quad (15)$$

Where $F (Y_c/D) = 1.0 + 0.0625[(2\theta_c - \sin\theta_c)/(\sin\theta_c * (Y_c/D))]$ And, $f (\eta, Y_c/D) = [0.125 (2\theta_c - \sin 2\theta_c)^3] / [(Y_c/D) (2\theta_c - \sin 2\theta_c)^2 \sin\theta_c]$

In the above equation, θ_c and θ_e are the angles made by Y_e and Y_c at the center of the circle. The equation was solved by computer and results showed that variation of Y_e/Y_c was relatively small and was taken as constant 0.730. For calculating the discharge for a given end depth, a calibration curve was plotted between $Q/(gD^5)^{1/2}$ and Y_e/D based on available experimental data of both smooth and rough channels.

Tiwari (1994) [52] developed an expression of free over fall at circular channel by applying momentum approach and developed computer software. Effect of weight of control volume on sloping floor was included in the derivation. For circular channel (diameter D and central angle 2θ radians), the equation developed by him showed that end depth ratio for the channel was a function of θ_c which in turn is a function of Y_c/D . For sloping channels, EDR was found to be a function of relative slope.

Dey (1998) [9] theoretically analyzed to calculate end depth ratio for smooth circular channel based on momentum approach for both sub critical and super critical flow. For sub critical flow, end depth ratio was found to be 0.75 for critical depth diameter ratio up to 0.82. For super critical flow, end depth was expressed as function of slope of the channel by using Manning's formula.

Expression for discharge was also proposed for both sub critical and super critical flow. He also calculated the upstream flow profile and an auto recursive search scheme to analyze the free over fall in horizontal circular channel.

Dey (2001) [10] derived a simplified approach to determine end depth of a free over fall in horizontal and

mildly sloping circular channel. The EDR for a circular channel was obtained by simulating the flow by that over a sharp crested weir by making coefficient of velocity as a free parameter. The theoretical model was compared with existing experimental data. The EDR varies almost linearly 0.72 to 0.74 for a critical depth diameter ratio up to 0.86. He obtained an expression for discharge. The model was well accordingly with the experimental data.

Nabavi et al. (2009) [32] gave a theoretical model to measure the flow by end depth method for horizontal or mildly sloping inverted semicircular channels. They analyzed based on momentum approach to give expression for EDR, whose value was found to be 0.7 for critical depth-diameter ratio up to 0.4. They also gave an expression for discharge. The theoretically obtained values agreed well with the experimental data of SubhasishDey.

Sharifi et al. (2011) [51] used genetic programming (GP) for modeling free over fall of circular channels to obtain an expression for end depth ratio. By applying GP to experimental data of circular channels with a flat bed and employing a model selection procedure, they derived the expression as

$$Y_c/Y_e = Ae^{B\sqrt{S}} \quad (16)$$

It was used for calculating the critical depth (Y_c) and end-depth ratio (EDR). This expression was dimensionally correct (unlike some other applications of GP) and can be used for channels with any cross-section and any flow regime.

Dey (2003) [13] carried out both experimental and theoretical study on free over fall of a smooth inverted semicircular channel. Based on momentum approach, he found the expression for the end depth ratio, which eliminated the need of an empirical pressure coefficient. For sub critical flow, EDR was found to be 0.705 for a critical depth diameter ratio up to 0.42 while for super critical flow the end depth was expressed as function of channel slope by applying Manning's equation.

Discharge was also estimated for both subcritical and supercritical flow and related with end depth and other characteristic parameter and upstream surface profile was computed. He carried out experiments in three inverted semicircular channels made of transparent Perspex, having diameter of 128mm, 68mm and 43mm and length of 4m. The computed values agreed well with experimental data except for supercritical flow which showed a little variation.

Rashwan and Idress (2013) [45] carried out an experimental and mathematical study to evaluate efficiency of brink as discharge measurement device in horizontal, mild and partially filled circular open channels. Mathematical equation was derived on the basis of momentum, discharge and Froude number expressions. The proposed model was calibrated with experimental data. Discharge was accurately calculated from end depth. Results of the laboratory experiments agreed with the calculated values and showed that circular flumes can be effectively used to measure low flow rates in open channels.

D. Traingular Channel

Replogle (1962) [37] carried out his investigation for rectangular, triangular and circular channels based on several assumptions used in Diskin's momentum equation (1961). He developed similar momentum equations and

showed that the effect of energy correction factor (α), momentum correction factor (β) and residual pressure is small, however they may account for approximately 5% of difference between actual discharge and discharge given by Diskin momentum equation. He also measured the pressure and velocity distribution for the channels.

Rajaratnam and Muralidhar (1964) [38] investigated on end depth at free over fall in exponential channels based on momentum approach. By solving the main equation, they obtained general expression of end depth at free over fall for rectangular ($n=1$), triangular ($n=2$) and parabolic ($n=1.5$) channels. The experimental channels had smooth surface. For triangular channel, K_1 and Y_e/Y_c was found to be 0.1 and 0.795 respectively. For sloping channel, end depth ratio was found to be a function of relative slope.

Tiwari (1994) [52] developed an expression of free over fall at triangular channel by applying momentum approach and developed computer software for its solution. Effect of weight of control volume on sloping floor was included in the derivation. For triangular channel (side slope 1 in m), the equation developed by him was

$$K_1 (Y_e/Y_c)^5 - (5/2) (Y_e/Y_c)^2 + (3/2) = 0 \quad (17)$$

The above equation is same as obtained by Rajaratnam et al. For horizontal bottom and zero end pressure, end depth ratio was (16) found to be 0.7746 and it was same as given by Diskin.

Mittal and Desmukh (1998) [26] developed computer software in FORTAN-77 language to estimate the flow in triangular free over fall. They developed calibration curves for triangular channel, with the help of which discharge can be calculated if brink depth is known. For triangular free over fall, equation of curve obtained by applying least square curve fitting technique was,

$$Y_R = 0.777 + 0.038K + 0.106K^2 \quad (18.1)$$

$$Q^* = 0.753 + 0.065K + 0.325K^2 \quad (18.2)$$

Q^* is the non dimensional discharge and Y_R is the end depth ratio. Another expression derived for triangular over fall curve was $Q=1000 [gY_b^{5/3}]^{0.5} \tan\theta Q^*$. In this paper, they had taken angle for triangular over fall as 45° . The error involved by using these equations was within 1% except for some higher values of K.

Nabavi (2008) [31] computed end depth ratio at free over fall of triangular channels by applying momentum equation. He gave a theoretical model to predict the pressure head distribution at the brink of free over falls, in a smooth-shaped (equilateral triangle-shaped) channel. In sub-critical flows, the EDR related to the critical depth was found to be 0.695 for critical depth-channel height ratio up to 0.6. In super-critical flows, the Manning equation was used to express the end-depth as a function of the upstream Froude number and relative bottom slope (S_0/S_c) of the channel. Discharge was estimated from the end-depth in sub-critical and super-critical flows. The discharge was also related to the end-depth and a characteristic parameter of the channel. The results obtained agreed well with the results of Dey for subcritical flow.

E. U Shaped

Tiwari (1994) [52] derived an expression for end depth ratio at free over fall of a U shaped channel (equation of channel $Y = BX^2$, parabolic) by applying momentum approach and

also developed computer software for this propose. For horizontal bed condition of the channel, equation developed was

$$K_1 (Y_e/Y_c)^4 - (8/3) (Y_e/Y_c)^{3/2} + (5/3) = 0 \quad (19)$$

The equation was same as that obtained by Rajaratnam et al. For $K_1 = 0$, the above expression yielded to $Y_e / Y_c = 0.731$, which was same as that obtained by Diskin.

Dey (2005) [11] theoretically analyzed the free over fall in horizontal U shaped channels based on momentum equation to obtain an expression for end depth. The experiments were conducted in two 4m long U shaped horizontal channels having width of 130mm and 70mm made of transparent Perspex sheet. The height of channels was three times of width. The EDR was found to be 0.75 up to non dimensional critical depth 0.5 and then it increases with increase in non dimensional critical depth. Estimation of discharge was also done from mathematical solution of end depth. Stream line curvature at free surface was used to obtain an expression for free surface profile. The results obtained from theoretical analysis well agreed with experimental data. The method eliminated the need of an empirical pressure coefficient.

III. CONCLUSION

With a small variation in brink depth brings larger fluctuation in discharge. Till date many research work has been carried out in the field but its not enough, there is lot of more work which is needed on this analysis for all shapes for the measurement of discharge by using brink depth or end depth. During the literature review, it was found that a lot of work has been carried out till date on various shapes of open channels like rectangular, trapezoidal, circular, triangular, parabolic, U shaped etc. for both horizontal and sloping channels.

- 1) In case of rectangular channel, there is a scope to examine the rectangular channel having sudden contraction and expansion along its length and gravel roughness of different sizes analysis in channel for both sloping and horizontal condition of channel.
- 2) In case of trapezoidal channel, number of experimental and theoretical works has been carried out for smooth channels. There is a need to analyze the effect of different sizes of gravel roughness on both trapezoidal channels.
- 3) There is a scope to determine the effect of different sizes of gravel roughness on horizontal and sloping circular channel. Discharge at free over fall of a circular channel should be analyzed for pressurized or transitional flow condition.
- 4) In triangular and U shaped channels the effect of different sizes of gravel roughness on adversely sloping channel shape need to be considered at the over falls. In all it required to examine effect of gravel roughness on the behaviour of brink depth, there by the estimation of discharge.

REFERENCES

[1] Alastair C. Davis, I Brian G. S. Ellett, and Richard P. Jacob, "FLOW MEASUREMENT IN SLOPING CHANNELS WITH RECTANGULAR FREE

OVERFALL" Journal of Hydraulic Engineering ASCE, 124:760-763, 1998.

- [2] Amirabdollahian M., Farshi F. and Kabiri-Samani A., "ESTIMATING FLOW PROPERTIES OVER FREE OVER FALL USING CONFORMAL MAPPING" 9th International Congress on Civil Engineering May 8-10, Isfahan University of Technology, 2012.
- [3] Ahmad Z., "QUASI THEORETICAL END DEPTH DISCHARGE RELATIONSHIP FOR RECTANGULAR CHANNELS" Journal of Irrigation and Drainage Engineering, ASCE, 129:138-141, April 2013.
- [4] BEIRAMI M.K., NABAVIS. V. and CHAMANI M. R. "FREE OVERFALL IN CHANNELS WITH DIFFERENT CROSS SECTIONS AND SUB-CRITICAL FLOW" Iranian Journal of Science & Technology, Transaction B, Engineering, Vol. 30, No. B1, 2006.
- [5] Davis A. C., Ellett B. G. S., and Jacob R.P., "FLOW MEASUREMENT IN SLOPING CHANNELS WITH RECTANGULAR FREE OVERFALL", J. Hydraulic Eng., ASCE, 124:760-763, 1998.
- [6] Delleur, J.W., Dodge, J.C.I and Gent, K.W., "INFLUENCE OF SLOPE AND ROUGHNESS ON THE FREE OVER FALL", Journal of Hydraulic Engineering, ASCE, 82(HYR), 1956.
- [7] Diskin, M.H., "THE END DEPTH OF A DROP IN TRAPEZODIAL CHANNELS", Journal Of Hydraulic Engineering, ASCE, 1961
- [8] Diskin, M.H., Discussion of "BRINK DEPTH FOR CIRCULAR CHANNELS", by C.D. Smith, Journal of Hydraulic Engineering, ASCE, March, 1963.
- [9] Dey, S., "END DEPTH IN CIRCULAR CHANNELS", Journal of Hydraulic Engineering, ASCE, 124: 856-863, 1998.
- [10] Dey, S., "END DEPTH IN STEEPLY SLOPING ROUGH RECTANGULAR CHANNELS", Sadhana, Vol. 25, Part 1, pp. 1- 10, February 2000.
- [11] Dey, S., "END DEPTH IN U SHAPED CHANNELS: A SIMPLIFIED APPROACH", Journal of Hydraulic Engineering, ASCE, 131:513-516, 2005.
- [12] Dey, S., "EDR IN CIRCULAR CHANNELS", Journal of Irrigation and Drainage Engineering, ASCE, 127:110-112, 2001.
- [13] Dey, S., "FREE OVER FALL IN INVERTED SEMICIRCULAR CHANNELS", Journal of Hydraulic Engineering, ASCE, 129:438-447, 2003.
- [14] Ferro, V., "FLOW MEASUREMENT WITH RECTANGULAR FREE OVERFALL", Journal of Irrigation and Drainage Engineering, ASCE, 118:956-964, 1992.
- [15] Ferro, V., "THEORETICAL END DEPTH DISCHARGE RELATIONSHIP FOR FREE OVER FALL" Journal of Irrigation and Drainage Engineering, ASCE, 125:40-44, February 1999.
- [16] Gupta, R.D, Jamfl, M. and Mohsin, M., "DISCHARGE PREDICTION IN SMOOTH TRAPEZOIDAL FREE OVERFALL (POSITIVE, ZERO AND NEGATIVE SLOPES)", Journal of Irrigation and Drainage Engineering, ASCE, 119:215-224, 1993.

- [17] Guo, Y., "NUMERICAL MODELLING OF FEEOVERFALL", Journal of Hydraulic Engineering, ASCE, 131:134-138, 2005.
- [18] Guo, Y., Zhang, L., Shen, Y. and Zhang, J., "MODELLING STUDY OF FREE OVERFALL IN A RECTANGULAR CHANNEL WITH STRIP ROUGHNESS", Journal of Hydraulic Engineering, ASCE, 134:664-667, 2008.
- [19] Hager, Willi H. "HYDRAULICS OF PLANE FEEOVERFALL" Journal of Hydraulic Engineering, ASCE, 109:1683-1697, 1983.
- [20] Hou, Q., Zhang, L., Tijsseling, A.S., Kruisbrink, A.C.H., "SPH SIMULATION OF FREE OVERFALL IN OPEN CHANNELS WITH EVEN AND UNEVEN BOTTOM" Centre for Analysis, Scientific computing and Applications Department of Mathematics and Computer Science Eindhoven University of Technology, 2013.
- [21] Krainjenhoff, D.A. and Dommerholt, A., "BRINK DEPTH METHOD IN RECTANGULAR CHANNEL", Journal of Irrigation and Drainage Engineering, ASCE, June 1977.
- [22] Keller, R. J. and Fong, S. S., "FLOW MEASUREMENT WITH TRAPEZOIDAL FREE OVERFALL", Journal of Irrigation and Drainage Engineering, ASCE, 115:125-136, 1989.
- [23] Khan, A. A. and Steffler, P. M., "MODELING OVERFALLS USING VERTICALLY AVERAGED AND MOMENT EQUATIONS", Journal of Hydraulic Engineering, ASCE, 122:397-402, 1996.
- [24] Litsa, A. and Evangelos, H., "GENERAL END-DEPTH DISCHARGE RELATIONSHIP AT FREE OVERFALL IN TRAPEZOIDAL CHANNEL", Journal of Irrigation and Drainage Engineering, ASCE, 121:143-151, 1995.
- [25] Marchi, E. "ON THE FREE OVER FALL", Journal of Hydraulic Research, IAHR, Volume 31, 1993.
- [26] Mittal S. and Desmukh T., "FLOW ESTIMATION IN RECTANGULAR AND TRIANGULAR FREE OVERFALLS", Journal of M.A.C.T, Volume 31, October 1998.
- [27] Mittal S., Desmukh T. and Gupta P., "END DEPTH IN EXPONENTIAL CHANNELS", Dept. Of Civil Engg., M.A.C.T. Bhopal.
- [28] Mohammed, A. Y. "EFFECT OF BED ROUGHNESS DISTRIBUTION AND CHANNEL SLOPE ON RECTANGULAR FREE OVERFALL", The 10th Int. Conf. on Hydro science and Engineering, Nov. 4 - Nov. 7 2011, Orlando, USA.
- [29] Mohammed M. Y., Ahmed Y. Al-taei and Al-Talib Azza N., "GRAVEL ROUGHNESS AND CHANNEL SLOPE EFFECTS ON RECTANGULAR FREE OVERFALL" Damascus University Journal Vol. (27) - No. (1), 2011.
- [30] Mohammed A. Y. "EFFECT OF BED ROUGHNESS DISTRIBUTION AND CHANNEL SLOPE ON RECTANGULAR FREE OVERFALL" AL-Qadisiya Journal For Engineering Sciences, Vol. 6, No 2, 2013.
- [31] Nabavi S. V. "FREE OVERFALL IN SHAPED CHANNELS" 3rd IASME / WSEAS Int. Conf. on WATER RESOURCES, HYDRAULICS & HYDROLOGY (WHH '08), University of Cambridge, UK, Feb. 23-25, 2008.
- [32] Nabavi S. V., Beirami M. K., Sterling M. "FLOWMETERING BY END-DEPTH METHOD IN INVERTED SEMICIRCULAR CHANNELS" Proceedings of the 4th IASME / WSEAS Int. Conference on WATER RESOURCES, HYDRAULICS & HYDROLOGY (WHH'09), 2009.
- [33] Pal M. and Goel A., "ESTIMATION OF DISCHARGE AND END DEPTH IN TRAPEZOIDAL CHANNEL BY SUPPORT VECTOR MACHINES" Water Resource Manage 21:1763-1780, 2007.
- [34] Rouse, H. "DISCHARGE CHARACTERISTICS OF FREE OVERFALL", Civil Engg. ASCE, April 1936.
- [35] Rajaratnam, N. and Thiruvengadam, A., J. of Inst. Of Engrs. (India), Civ. Engg. Div., April 1961.
- [36] Rajaratnam, N., Discussion of "THE END DEPTH AT A DROP IN TRAPEZOIDAL CHANNELS", by M.H. Diskin, Journal of Hydraulic Division, ASCE, March 1962.
- [37] Rapolle, J.A., Discussion of "END DEPTH AT DROP IN TRAPEZOIDAL CHANNELS", By M.H. Diskin, Journal of Hydraulic Engg. ASCE, March 1962.
- [38] Rajaratnam, N. and Muralidhar, D., "END DEPTH FOR EXPONENTIAL CHANNELS", Journal of Irrigation and Drainage Engineering, ASCE, March 1964.
- [39] Rajaratnam, N. and Muralidhar, D., "END DEPTH FOR CIRCULAR CHANNELS", Journal of Hydraulic Engineering, ASCE, March 1964.
- [40] Rajaratnam, N. and Muralidhar, D., "THE TRAPEZOIDAL FREE OVERFALL", Journal of hydraulic Research, 1970.
- [41] Rajaratnam, N., Muralidhar, D. and Beltaos, S., "ROUGHNESS EFFECTS ON RECTANGULAR FREE OVER FALL", Journal of Hydraulic Engineering, ASCE, August 1976.
- [42] Rai, A.S., "END DEPTH AT A DROP IN RECTANGULAR CHANNELS", M.E. Thesis, Civil Engineering Department, Govt. Engg. College, Raipur, 1993.
- [43] Ramamurthy A.S., Zhai C. and Qu Junying, "END DEPTH DISCHARGE RELATIONSHIP AT FREE OVERFALL OF TRAPEZOIDAL CHANNEL" Journal of Irrigation and Drainage Engineering ASCE, 130: 432-436, October 2004.
- [44] Ramamurthy A.S., Qu J. and Vo D., "VOF MODEL FOR SIMULATION OF A FREE OVER FALL IN TRAPEZOIDAL CHANNELS" Journal of Irrigation and Drainage Engineering ASCE, 132:425-428, August 2006.
- [45] Rashwan I.M.H and Idress M.I., "BRINK AS A DEVICE FOR MEASUREMENT DISCHARGE FOR PARTIALLY FILLED CIRCULAR CHANNELS", Ain Shams Engineering Journal, 133-141, 2013.
- [46] Smith, C.D., "BRINK DEPTH FOR CIRCULAR CHANNELS", Journal of Hydraulic Engg. ASCE, November 1962.
- [47] Strelkoff, T. and Moyer, M.S., "PATTERN OF POTENTIAL FLOW IN A FREE OVERFALL", Journal of Hydraulic Engg. ASCE, April 1970.

- [48] Subramanya, K. and Keshavamurthy, K., "END DEPTH IN A TRAPEZOIDAL OVERFALL", J. of Inst. Engg. Div., May 1987.
- [49] Subramanya, K. and Keshavamurthy, K., "FLOW IN OPEN CHANNELS", Tata McGraw-Hill Publishing Co., New Delhi, 1989.
- [50] Subramanya, K. and Niraj Kumar, "END DEPTH IN A HORIZONTAL CIRCULAR FREE OVERFALL", J. of Inst. Engg. Div., March 1993.
- [51] Sharifi S., Sterling M. and Knight D.W. "PREDICTION OF END-DEPTH RATIO IN OPEN CHANNELS USING GENETIC PROGRAMMING" Journal of Hydroinformatics, 2011.
- [52] Tiwari H., "END DEPTH COMPUTATIONS IN PRISMATIC CHANNELS", M.Tech Thesis, Dept. Of Civil Engg. MANIT, Bhopal, 1994
- [53] Tigrek S., Firat C. E. and Ger A. M., "USE OF BRINK DEPTH IN DISCHARGE MEASUREMENT", Journal of Irrigation and Drainage Engineering ASCE, 134:89-95, 2008.
- [54] Vatankhah Ali R., "DIRECT SOLUTION FOR DISCHARGE IN GENERALIZED TRAPEZOIDAL FREE OVERFALL" Department of Irrigation and Reclamation Engineering, University College of Agriculture and Natural Resources, University of Tehran.
- [55] Zchoval Z., Bohm P., Parilkova J., Safar R. and Sulc J. "SHAPE OF THE NAPPE DURING FREE OVERFALL FROM A RECTANGULAR CHANNEL WITH ZERO BED SLOPE" J. Hydrology Hydromechanics, 61, 2013, 3, 222-231, 2013.

