

Improvement of Production Rate by Line Balancing for Small Scale Industry: A Case Study

Pankaj Shukla¹ Prof. Susheel Malviya² Prof. Sachin Jain³

¹M.Tech Student ²Assistant Professor ³Head of Department

^{1,2,3}Department of Mechanical Engineering

^{1,2,3}BIST Bhopal, MP, 462021, India

Abstract— In this research we aimed to improve a line balancing efficiency of a small scale leather women’s handbag manufacturing industry which was having a very poor line efficiency of 40.5%. So much of wastage of time, manpower and recourses were taking place at the organization. The aim of this thesis report was to improve the line efficiency of the organization by using heuristic methods of line balancing i.e. largest candidate rule, Kilbridge & wester column method and rank positional method then we have done a comparative study in the existing factory with line balancing technologies. First of all we calculated the existing line efficiency of the organization mathematically which was found to be 40.5%. Then we applied largest candidate rule (LCR), Kilbridge and wester column (KWC) and rank positional method (RPW) methods of line balancing in the existing factory to balance the sequence and time duration of work elements. We done mathematical analysis and found that by using largest candidate rule method, line efficiency can be increased to 77.09, Kilbridge & wester column method gives 70.70% line efficiency and rank positional weighted method gives 77.09% line efficiency. It is proposed that we can use the largest candidate rule or rank positional method to increase the line efficiency of the existing organization and thus can improve the productivity.

Key words: Line Balancing, Productivity Improvement, Heuristic Algorithms, Small Scale Industry, Yamazumi Chart

I. INTRODUCTION

An assembly line is a manufacturing process (often called a progressive assembly) in which parts (usually interchangeable parts) are added as the semi-finished assembly moves from workstation to workstation where the parts are added in sequence until the final assembly is produced. By mechanically moving the parts to the assembly work and moving the semi-finished assembly from work station to work station, a finished product can be assembled faster and with less labor than by having workers carry parts to a stationary piece for assembly. Assembly lines are common methods of assembling complex items such as automobiles & other transportation equipment, household appliances and electronic goods. Assembly lines are designed for the sequential organization of workers, tools or machines, and parts. The motion of workers is minimized to the extent possible. All parts or assemblies are handled either by conveyors or motorized vehicles such as fork lifts, or gravity, with no manual trucking. Heavy lifting is done by machines such as overhead cranes or forklifts. Each worker typically performs one simple operation. The principles of assembly are Place the tools and the men in the sequence of the operation so that each component part shall travel the least possible distance while in the process of finishing. Then Use work slides or some other form of carrier so that when a

workman completes his operation, he drops the part always in the same place which place must always be the most convenient place to his hand and if possible have gravity carry the part to the next workman for his own. Afterward Use sliding assembling lines by which the parts to be assembled are delivered at convenient distances.

II. METHODOLOGY

The methodology of this research will have Following steps

A. Process Flow Chart

The methodology of the research contains the following processes to be done for the calculation of balance delay and line efficiency so as to increase the productivity of the current organization is shown below in figure 2.1.

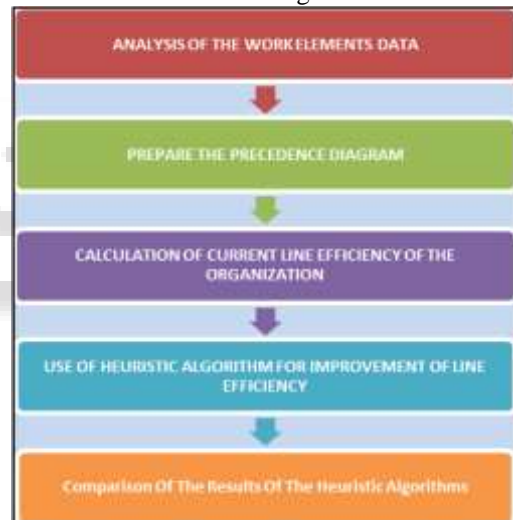


Fig. 2.1: Process Flow Chart of the Methodology

B. Calculation of Current Line Efficiency of the Organization

In this step we will calculate the current line efficiency with the help of current data available of the organization. For this purpose will be requiring number of workstations (N), cycle time (T_c), total work content (T_{wc}). The calculation of the cycle time, number of workstations and line efficiency can be done by using these formulas.

$$\text{Cycle time} = \frac{\text{Available time}}{\text{Desired Output}}$$

$$\text{Number of workstations} = \frac{\sum \text{Task Time}}{\text{Desired Actual Time}}$$

$$\text{Line efficiency} = \frac{\text{Sum Of Task Times}}{\text{N umber Of Workstations} \times \text{Desired Cycle Time}}$$

C. Use of Heuristic Algorithm for Improvement of Line Efficiency

In this step we will use the heuristic algorithm such as Largest Candidate Rule, Kilbridge and Wester Column Method and Rank Positional Weighted method to improve the line efficiency. These are very sophisticated method used for line balancing.

1) Largest-Candidate Rule (LCR)

This is the easiest method to understand. The work elements are selected for assignment to stations simply on the basis of the size of their T_e values.

a) Procedure:

- 1) Step 1. List all elements in descending order of T_e value, largest T_e at the top of the list.
- 2) Step 2. To assign elements to the first workstation, start at the top of the list and work done, selecting the first feasible element for placement at the station. A feasible element is one that satisfies the precedence requirements and does not cause the sum of the T_{ej} value at station to exceed the cycle time T_c .
- 3) Step 3. Repeat step 2.

2) Kilbridge & Wester's Column Method (KWC)-

It is a heuristic procedure which selects work elements for assignment to stations according to their position in the precedence diagram. This overcomes one of the difficulties with the largest candidate rule (LCR), with which elements at the end of the precedence diagram might be the first candidates to be considered, simply because their values are large.

a) Procedure:

- 1) Step 1. Construct the precedence diagram so those nodes representing work elements of identical precedence are arranged vertically in columns.
- 2) Step 2. List the elements in order of their columns, column I at the top of the list. If an element can be located in more than one column, list all columns by the element to show the transferability of the element.
- 3) Step 3. To assign elements to workstations, start with the column I elements. Continue the assignment procedure in order of column number until the cycle time is reached (T_c).

3) Ranked Positional Weighted Method (RPW)

It Combined the LCR and K-W methods. The RPW takes account of both the T_e value of the element and its position in the precedence diagram. Then, the elements are assigned to workstations in the general order of their RPW values.

a) Procedure

- 1) Step 1. Calculate the RPW for each element by summing the elements T_e together with the T_e values for all the elements that follow it in the arrow chain of the precedence diagram.
- 2) Step 2 List the elements in the order of their RPW, largest RPW at the top of the list. For convenience, include the T_e value and immediate predecessors for each element.
- 3) Step 3. Assign elements to stations according to RPW, avoiding precedence constraint and time cycle violations.
- 4) By using all these three algorithms we need to find out the balance delay and line efficiency of the organization in each case.

III. RESULT ANALYSIS

The following work element data relates to a small scale women handbag manufacturing company namely Gagan Leather House Private Limited, Indore, and Madhya Pradesh, India.

A. Analysis of Line Efficiency of the Current Factory

1) Analysis of Work Element Data of Current Factory

Task	Task Time (Sec)	Immediate Predecessor
1 (Cutting)	55	-
2 (Skewing)	47	1
3 (Glue Adding)	24	2
4 (Painting)	55	1
5 (Hot Marking)	22	1
6 (Swing)	108	3,4,5
7 (Painting)	74	6
8 (Drying)	139	7,9
9 (Zipper Setting)	114	6
10 (Manual Material Handling)	61	8
11 (Cloth Adding)	99	10
12 (CNC Swing)	60	11
13 (Hot Work)	34	11
14 (Logo Punch)	32	11
15 (Final Swing)	120	12,13,14
16 (Final Zipper Setting)	130	12,13,14
17 (Finishing)	61	15,16
18 (Quality Control)	30	17
19 (Packaging)	14	18
Total Task Time	1279	

Table 3.1.1: Analysis of Work Element Data

2) Preparation of Precedence Diagram

The below shown diagram shows the precedence diagram of the existing factory

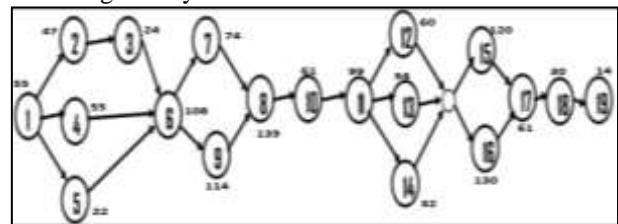


Fig. 3.1.2: Precedence Diagram of Existing Unit

3) Calculation of Line Efficiency & Balance Delay

Demand per month of hand bags = 6250 pieces

Working day in a month = 24 days

Working hour in a day = 12 hours

Number of workstation (N) = 19

Total work content = 1279 seconds

So cycle time is calculated as follows

$$\text{Cycle time} = \frac{\text{Available time}}{\text{Desired Output}}$$

$$T_c = 1036800 / 6250$$

$$(\text{Cycle time or takt time}) T_c = 165.89 \quad (1)$$

Number of work stations N = 19

a) Line Efficiency Calculation

$$\text{Balance Delay} = \{ (NT_c - T_{wc}) / (NT_c) \} \times 100$$

Balance Delay =

$$\{(19 \times 165.89 - 1279) / (19 \times 165.89)\} \times 100$$

$$\text{Balance Delay} = 0.594 = 59.4 \% \quad (2)$$

So now

Line efficiency (η) = 1 - Balance Delay

Line efficiency (η) = 1 - 0.594

$$\text{Line efficiency } (\eta) = 0.405 = 40.5 \% \quad (3)$$

The figure 3.1.3 shown below shows the processes with their respective times

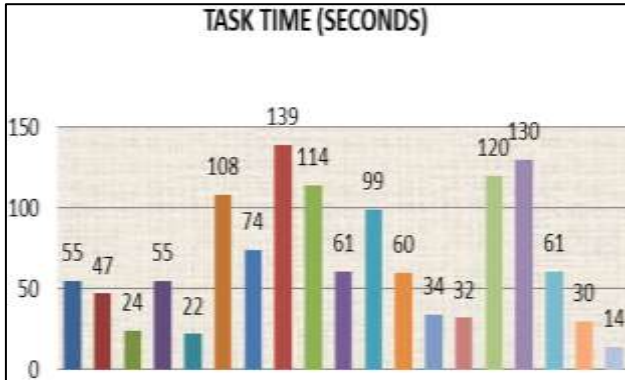


Fig 3.1.3: Processes with their Respective Times

B. New Layout by Using Largest Candidate Rule of Line Balancing

By following largest candidate rule method we have found out the optimum number of workstations to be 10. The line efficiency and balance delay calculation shown below-

1) Calculation of Line Efficiency & Balance Delay

- Demand per month of hand bags = 6250 pieces
- Working day in a month = 24 days
- Working hour in a day = 12 hours
- Number of workstation (N) = 10
- Total work content = 1279 seconds

So cycle time is calculated as follows

$$\text{Cycle time} = \frac{\text{Available time}}{\text{Desired Output}} \quad (1)$$

$$T_c = 1036800 / 6250$$

$$\text{(Cycle time or takt time) } T_c = 165.89 \quad (2)$$

Number of work stations N = 10

a) Line efficiency calculation:

$$\text{Balance Delay} = \{(NT_c - T_{wc}) / (NT_c)\} \times 100$$

$$\text{Balance Delay} = \{(10 \times 165.89 - 1279) / (10 \times 165.89)\} \times 100$$

$$\text{Balance Delay} = 0.229 = 22.9 \% \quad (3)$$

So now

Line efficiency (η) = 1 - Balance Delay

Line efficiency (η) = 1 - 0.229

$$\text{Line efficiency } (\eta) = 0.779 = 77.9 \% \quad (4)$$

The below 3.2.1 table shows the summary of line balancing with the help of LCR.

Workstations	Processes	Time Duration (Sec)
1	(Cutting,Painting,Skewing,)	157
2	(Glue Adding,Hot Marking,Swing)	154
3	(Zipper Setting)	114
4	(Painting)	74
5	(Painting)	139

6	Manual Material Handling,Cloth Adding)	160
7	(Cnc Swing,Hot Work, Logo Punch)	126
8	(Final Zipper Setting)	130
9	(Final Swing)	120
10	(Finishing, Quality Control,Packaging)	105

Table 3.2.1: Summary of Line Balancing with the Help of LCR

The below shown figure 3.2.1 shows the line balancing by LCR.

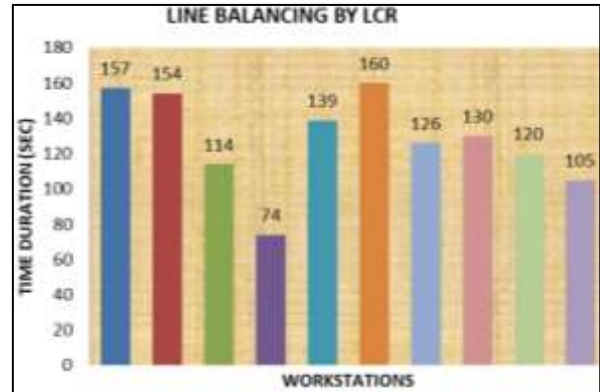


Fig. 3.2.1: Line Balancing by LCR

C. New Layout by Kilbridge & Wester Column Rule of Line Balancing

By following kilbridge and wester column method we have found out the optimum number of workstations to be 13. The line efficiency and balance delay calculation shown below-

1) Calculation of Line Efficiency and Balance Delay

- Demand per month of hand bags = 6250 pieces
- Working day in a month = 24 days
- Working hour in a day = 12 hours
- Number of workstation (N) = 13
- Total work content = 1279 seconds

a) Line Efficiency Calculation

$$\text{Balance Delay} = \{(NT_c - T_{wc}) / (NT_c)\} \times 100$$

$$\text{Balance Delay} = \{(13 \times 139 - 1279) / (13 \times 139)\} \times 100$$

$$\text{Balance Delay} = 0.292 = 29.2 \% \quad (3)$$

So now

Line efficiency (η) = 1 - Balance Delay

Line efficiency (η) = 1 - 0.292

$$\text{Line efficiency } (\eta) = 0.707 = 70.7 \% \quad (4)$$

2) Distribution of work elements to workstation according to KWC method-

The distribution of work elements to workstation according to KWC method is shown below in figure 3.3.2.

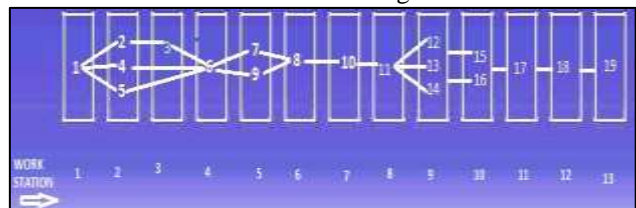


Fig. 3.3.2: Distribution of Work Elements to Workstation
The below shown figure 3.3.3 shows the line balancing with KWC method

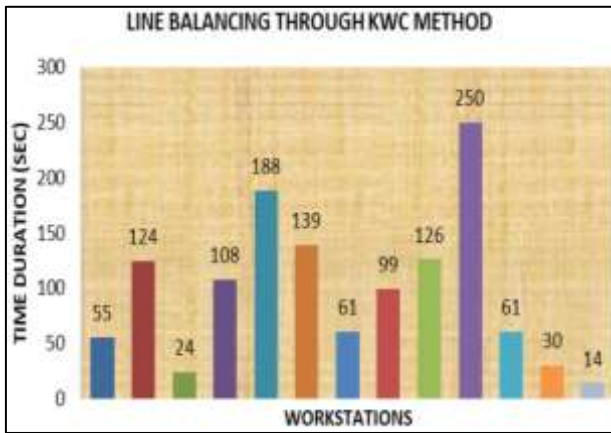


Fig. 3.3.3: Line Balancing With KWC Method

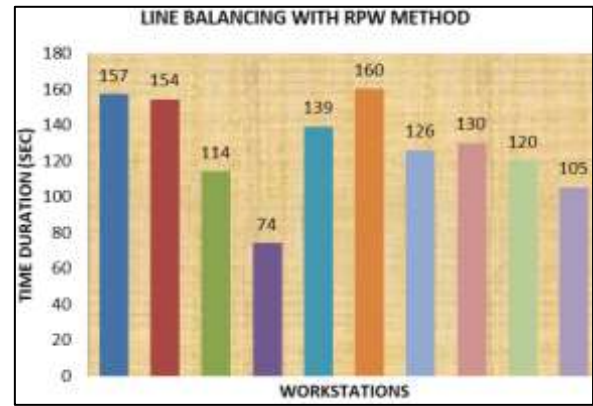


Figure 3.4.1 Line Balancing Through RPW Method

D. New Layout by Rank Positional Weighted Method of Line Balancing

1) Calculation of Line Efficiency and Balance Delay

- Demand per month of hand bags = 6250 pieces
- Working day in a month = 24 days
- Working hour in a day = 12 hours
- Number of workstation (N) = 10
- Total work content = 1279 seconds

a) Line Efficiency Calculation

$$\text{Balance Delay} = \left\{ \frac{(NT_c - T_{wc})}{(NT_c)} \right\} \times 100$$

$$\text{Balance Delay} = \left\{ \frac{(10 \times 165.89 - 1279)}{(10 \times 165.89)} \right\} \times 100$$

$$\text{Balance Delay} = 0.229 = 22.9 \% \quad (3)$$

So now

$$\text{Line efficiency } (\eta) = 1 - \text{Balance Delay}$$

$$\text{Line efficiency } (\eta) = 1 - 0.229$$

$$\text{Line efficiency } (\eta) = 0.7709 = 77.09 \% \quad (4)$$

The below table 3.3.1 shows the optimum number of workstation according to KWC method

Workstation	Processes	Time Duration (sec)
1	(Cutting, Skewing, Painting)	157
2	(Glue Adding, Hot Marking, Swing)	154
3	(Zipper Setting)	114
4	(Painting)	74
5	(Drying)	139
6	(Manual Material Handling, Cloth Adding)	160
7	(CNC Swing, Hot Work, Logo Punch)	126
8	(Final Zipper Setting)	130
9	(Final Swing)	120
10	(Finishing, Quality Control, Packaging)	105

Table 3.3.1: Optimum Number of Workstation According to RPW Method

The below shown figure 3.4.1 shows the line balancing through RPW method

E. Result Summary

We have done the numerical analysis of the line efficiency of the current organization with existing setup and then analyzed numerically for line balancing with three heuristic methods i.e. largest candidate rule, Kilbridge and wester column method and rank positional weighted method respectively.

Sr No	Line Balancing Methods	Line Efficiency
1	Current Factory	40.50%
2	Largest Candidate Rule (LCR)	77.09%
3	Kilbridge And Wester Column(KWC)	70.70%
4	Rank Positional Weight (RPW)	77.09%

Table 3.5.1: Result Summary of line efficiencies of LCR, KWC & RPW methods

The below shown figure 3.5.1 shows the line efficiency comparison of existing, LCR, KWC and RPW line balancing efficiencies

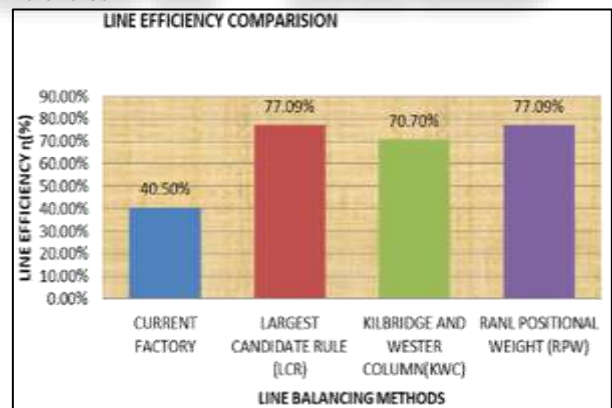


Fig. 3.5.1: Line Efficiency Comparison

IV. CONCLUSION

In this research we have study and analyzed the line efficiency problem of a women hand bag manufacturing industry. At first we have calculated the current line efficiency of the organization which was very poor only 40.5%. So we used some heuristic methods of line balancing which are largest candidate rule, Kilbridge & wester column and rank positional weighted method of line balancing for the organization to balance the sequence and time duration of work elements. We done mathematical analysis and found that by using largest candidate rule method, line efficiency

can be increased to 77.09, Kilbridge & wester column method gives 70.70% line efficiency and rank positional weighted method gives 77.09% line efficiency. Hence we can use the largest candidate rule or rank positional method to increase the line efficiency. All of the three heuristic method of line balancing i.e. largest candidate rule, Kilbridge & wester column method and rank positional weighted method were studied for the line balancing of the existing women hand bag manufacturing organization.

REFERENCES

- [1] Nurul Nazeerah Mishan and Masine Md Tap, "Increasing Line Efficiency By Using Timestudy And Line Balancing In A Food Manufacturing Company", *Jurnal Mekanikal*, Vol 38, 32-43, DEC 2015.
- [2] Ahmad Naufal Adnan, Nurul Ain Arbaai And Azianti Ismail, "Improvement Of Overall Efficiency Of Production Line By Using Line Balancing", *ARPN Journal Of Engineering And Applied Sciences*, Vol. 11, No. 12, June 2016.
- [3] Akshay D. Wankhade & Dr. Achal S. Shahare, "Productivity Improvement by Optimum Utilization of Plant Layout: A Case Study", *International Research Journal of Engineering and Technology*, Volume 04, Issue 06, June -2017.
- [4] Yotsuda Buranasing and Juthamas Choomlucksana, "Lean Manufacturing and Work Study: Analysis and Integration in an Outbound Logistics Case Study", *Journal of Engineering and Science Research*, volume 2, issue 2, pp 17-25, 2018.
- [5] Balaji Rathod, Prasad Shinde, Darshan Raut & Govind Waghmare, "Optimization of Cycle Time by Lean Manufacturing Techniques Line Balancing Approach", *International Journal For Research In Applied Science & Engineering Technology*, Volume 4 Issue V, May 2016.
- [6] Sleem S.N., Helal M. and Ellassal A.M., "Using Computer Simulation in Lean Manufacturing Implementation", *Benha Faculty of Engineering, Benha University, Mechanical Engineering Technology, EGYPT*.
- [7] Maciej Pieńkowski, "Waste Measurement Techniques For Lean Companies", *International Journal Of Lean Thinking*, Volume 5, Issue 1, December 2014.
- [8] Mr. Satish Keru Raut, Prof. Kedar M. Relekar and Mr. Vikas Sarjerao Dhane, "A Case Study of Productivity Improvement by using IE Tools", *International Journal Of Innovations In Engineering Research And Technology [IJERT]*, volume 1, issue 1 NOV 2014.
- [9] Jaana Koistinen, "Automation Of Pre Assembly Cell And Improvement Of Material Flow", *Management Oulu University Of Applied Sciences*, 2015.
- [10] Shraavan Dhanpal Harinath and Shakeel Ahmed Siddique, "Identifying specific line balancing criteria for an efficient line balancing software", *Production Development and Management*, January 2018.
- [11] Amol Nayakappa Patil And M Prabhakaran, "Labor Productivity Improvement By Work Study Tools Of Fiber Composite Company", *International Journal Of Research In Engineering And Technology*, Volume: 05 Issue: 09, Sep-2016.
- [12] Amal S Das & P V Gopinadhan, "Productivity Improvement Using Industrial Engineering Tools – Case Study Of a Typical Spinning Mill", *International Journal of Engineering Development and Research*, Volume 4, Issue 3, 2016.
- [13] Chyntia Ramadina and Ineu Widaningsih Sosodoro, "Manpower Planning of Assembly Line Part A005TG2991ZJ at PT. Mitsubishi Electric Automotive Indonesia, Jawa Barat", *Faculty of Engineering, Industrial Engineering Department, President University, J. Ki Hajar Dewantara Kota Jababeka, Cikarang, Bekasi – Indonesia*.
- [14] Thosapon Thongchai & Pichit Sukhareonpong, "The Improvement of the Airbag Manufacturing: A Case Study of the Automotive Safety Equipment", *Journal of Engineering and Technology*, Volume 5, issue 1, January - June 2017.
- [15] Nur Nadiah Binti Mohammad Alwudin, "The Reduction Of Work In Progress Between Process In Strut Production Line Of A Manufacturing Factory", *Faculty Of Manufacturing Engineering University Malaysia Pahang*, June 2012.
- [16] Masudul Haque Talukder, Mohammad Ali Afzal, MD. Abdur Rahim & Mohd. Rifat Khan, "Waste Reduction and Productivity Improvement through Lean Tools", *International Journal of Scientific & Engineering Research*, Volume 4, Issue 11, November-2013.
- [17] Subrata Talapatra, Sharif-Al-Mahmud & Imran Kabir, "Overall Efficiency Improvement of a Production Line by Using Yamazumi Chart: A Case Study", *Proceedings of the International Conference on Industrial Engineering and Operations Management Paris, France*, July 26-27, 2018.
- [18] Bhavik Shaileshkumar Sheth, Tanmay Swaroop & Rabinder Henry, "A Case Study On Improving The Productivity Using Ie Tools", *International Journal Of Mechanical And Industrial Engineering (IJMIE)*, ISSN No. 2231 –6477, Volume-2, Issue-2, 2012.
- [19] Akashdeep Singh Gandhi, "Productivity Improvement through Time Study (Work Measurement) and Line Balancing at Automotive Seat Belts Manufacturer", *International Journal of Innovative Research in Science, Engineering and Technology*, Vol. 7, Issue 7, July 2018.
- [20] H. Mapfaira, M. Mutingi, V.P. Kommula, K. Mashaba, M. Malema, and T. Selema, "The Use of Productivity Improvement Tools and Techniques in the Botswana Textile Industry", *International Journal of Mining, Metallurgy & Mechanical Engineering (IJMME)*, Volume 3, Issue 3 2015.
- [21] Muhammad Farhan Mohd Suhaimi and Noor Azlina Mohd Salleh, "A Case Study On The Improvement Of Productivity And Efficiency Of A Quality Control Line For A Cutting Tool Manufacturer", *Journal of Mechanical Engineering*, Vol SI 5(1), 222-239, 2018.
- [22] Dušan Sabadka, Viero Slav Molnár, Gabriel Fedorko & Tomasz Jachowicz, "Optimization Of Production Processes Using The Yamazumi Method", *Advances In Science And Technology Research Journal*, Volume 11, Issue 4, Pages 175–182, December 2017.
- [23] B. Naveen and Dr. T. Ramesh Babu, "Productivity Improvement in Manufacturing Industry Using

- Industrial Engineering Tools”, IOSR Journal of Mechanical and Civil Engineering, p-ISSN: 2320-334X, PP 11-18.
- [24] Sandip K. Kumbhar, Niranjana M. R and Sanjay T. Satpute, “Assembly Line Production Improvement By Optimization Of Cycle Time”, International Journal of Mechanical And Production Engineering, Volume- 2, Issue-8, Aug.-2014.
- [25] EHR Consultants, “ NGIA Waste assessment project (NY13003)”, 2014.
- [26] Ottman J. “Green Marketing Opportunity for Innovation 2nd Edition NTC Business”, Chicago ,(1998)
- [27] Wutichai Promsuwan, and Jeerapat Ngaoprasertwong, “Increase Productivity with Lean Concept in Final Visual Inspection Process of Hard Disk’s Suspension”, International Journal of Mining, Metallurgy & Mechanical Engineering (IJMMME) ,Volume 3, Issue 4 (2015).
- [28] Dhruv Shah & Mr. Pritesh Patel, “Productivity Improvement by Implementing Lean Manufacturing Tools In Manufacturing Industry”, International Research Journal of Engineering and Technology (IRJET), Volume: 05 Issue: 03, Mar-2018.
- [29] Kelvin Chan, “Productivity methodologies, tools, and techniques” , Teian Consulting International Pte Ltd, Development of Productivity Practitioners ,Singapore.
- [30] Fahzy Abdul-Rahman, “Reduce, Reuse, Recycle: Alternatives for Waste Management”, Extension Family Resource Management Specialist, Department of Extension Family and Consumer Sciences, New Mexico State University, January 2014.

