

# Comparative Study of Doubled Pipe Heat Exchanger and Shelland Tube Heat Exchanger

Mahadeva Gouda R<sup>1</sup> Gyanappa<sup>2</sup> Riyaz Ahmed<sup>3</sup> Kallayya<sup>4</sup> Lava K R<sup>5</sup>

<sup>1,2,3,4</sup>UG Student <sup>5</sup>Assistant Professor

<sup>1,2,3,4,5</sup>Department of Mechanical Engineering

<sup>1,2,3,4,5</sup>NCET, Bengaluru, India

**Abstract**— Heat exchanger using Nano fluid is a device in which the heat transfer takes place by using Nano fluid. In this the working fluid is Nano fluid. Nano fluid is made by the suspending Nano particles in the fluid like water, ethylene glycol and oil, hydrocarbons, fluorocarbons etc. Heat transfer is the exchange of thermal energy between physical systems. The rate of heat transfer is dependent on the temperatures of the systems and the properties of the intervening medium through which the heat is transferred. The three fundamental modes of heat transfer are conduction, convection and radiation. Heat transfer, the flow of energy in the form of heat, is a process by which a system changes its internal energy, hence is vital use in applications of the First Law of Thermodynamics. The direction of heat transfer is from a region of high temperature to another region of lower temperature, and is governed by the Second Law of Thermodynamics. Heat transfer changes the internal energy of the systems from which and to which the energy is transferred.

**Nomenclature:**

- TDC : top dead centre
- BTDC : before top dead centre
- UBHC : unburned hydrocarbon
- NOX : oxides of nitrogen
- CO : carbon monoxide
- CI : compression ignition
- PME : poly methyl ester
- CFD : computational fluid dynamics
- SF C : specific fuel consumption
- CV : calorific value
- CR : compression ratio
- IP : injection pressure
- Bth : brake thermal efficiency
- BP : brake power

I. INTRODUCTION

A heat exchanger is a device that allows heat from a fluid (a liquid or a gas) to pass to a second fluid (another liquid or gas) without the two fluids having to mix together or come into direct contact. The most common design has one fluid flowing through metal tubes and the other fluid flowing around the tubes. On either side of the tube, heat is transferred by Convection. Heat is transferred through the tube wall by conduction, working of heat exchanger as shown in figure 1.1.

Nano fluids are a new class of fluids engineered by dispersing Nanometer-sized materials (Nanoparticles, Nano fibers, Nanotubes, Nanowires, Nano rods, Nano sheet, or droplets) in base fluids. In other words, Nano fluids are Nano scale colloidal Suspensions containing condensed Nano material. They are two-phase systems with one phase (solid phase) in another (liquid Phase). Nano fluids have been found to possess enhanced thermo physical properties such as

thermal conductivity, thermal diffusivity, viscosity, and convective heat transfer coefficients compared to those of base fluids like oil or water.

It has demonstrated great potential applications in many fields. For a two-phase system, there are some important issues we have to face. One of the most important issues is the stability of Nano fluids, and it remains a big challenge to achieve desired stability of Nano fluids

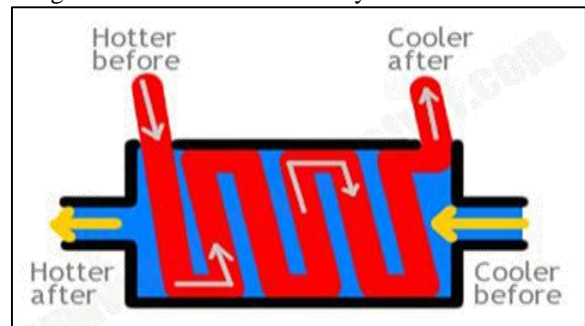


Fig. 1.1: Working of Heat Exchanger

A. Classification of Heat Exchangers

1) Classification of Heat Exchangers by Flow Configuration

There are four basic flow configurations:

- Counter Flow
- Parallel flow
- Cross flow
- Hybrids such as Cross Counter flow and Multi Pass Flow

a) Counter Flow

As shown in Figure 1.2 illustrates an idealized counter flow exchanger in which the two fluids flow parallel to each other but in opposite directions. This type of flow arrangement allows the largest change in temperature of both fluids and is therefore most efficient (where efficiency is the amount of actual heat transferred compared with the theoretical maximum amount of heat that can be transferred).

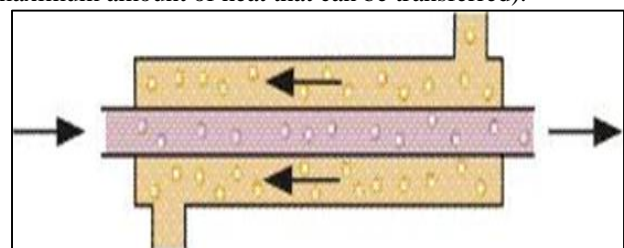


Fig. 1.2: Counter flow

b) Parallel Flow

In parallel flow heat exchangers, the streams flow parallel to each other and in the same direction as shown in Figure 1.3, this is less efficient than countercurrent flow but does provide more uniform wall temperatures.

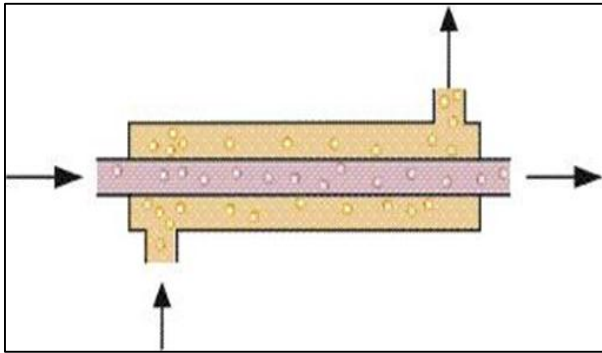


Fig. 1.3: Parallel flow

c) Cross flow

Cross flow heat exchangers are intermediate in efficiency between counter flow and parallel flow exchangers. In these units, the streams flow at right angles to each other as shown in Figure 1.4.

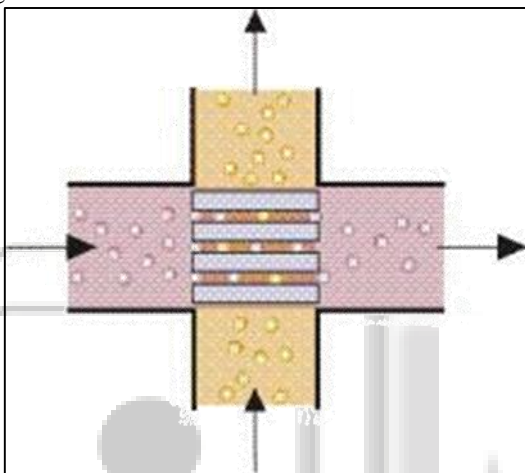


Fig. 1.4: Cross flow

d) Cross/counter flow

In industrial heat exchangers, hybrids of the above flow types are often found. Examples of these are combined cross flow/counter flow heat exchangers and multi pass flow heat exchangers. As shown in figure 1.5.

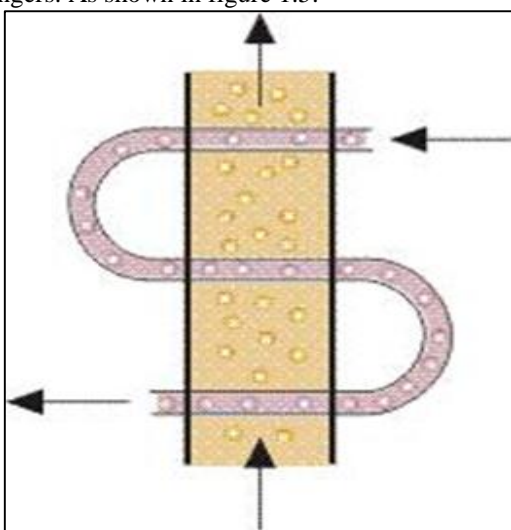


Fig. 1.5: Cross/counter flow

## II. EXPERIMENTAL SET UP

The experiments were conducted on a computerized CI engine test rig shown in Fig.1.

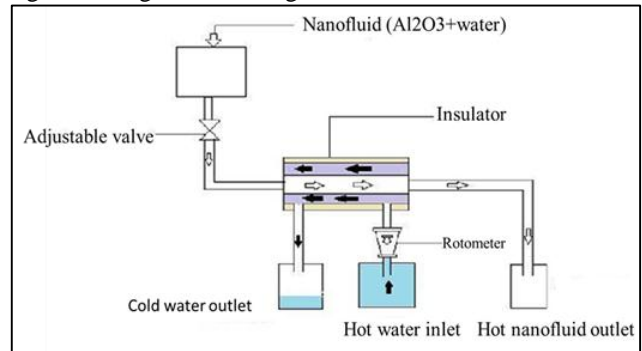


Fig. 1.6: Experimental set up

We selected the materials and required equipment. The calculations of parallel and counter flow heat exchanger are carried out for comparison. The Assemble Copper tube and Cotton Thread Insulation is done



Fig. 1.7: Shell and tube Heat exchanger

| SL NO | SPECIFICATION                     |
|-------|-----------------------------------|
| 01    | Inner Pipe diameter - 12mm        |
| 02    | Outer Pipe diameter - 18mm        |
| 03    | Inlet temperature - 28°C          |
| 04    | Hot water temperature - 70 - 80°C |
| 05    | Length of the device - 609mm      |
| 06    | Flow rate - 0.5LPM to 2LPM.       |
| 07    | Outer shell diameter - 130mm      |

Table 1: Shell and Tube Heat Exchanger Specification

## III. EXPERIMENTAL PROCEDURE

A set of experiments were conducted for Doubled pipe Parallel and counter flow heat exchanger for both Water and Nanofluid, and experiments were conducted for Doubled pipe shell and tube heat exchanger for both Water and Nanofluid. Compare the effectiveness for both the fluids at different temperatures.

## IV. RESULTS & DISCUSSION

The results of the Heat Exchangers presented in Figs. 4-11. All comparisons have been made at different temperature of hot fluid and different flow rates.

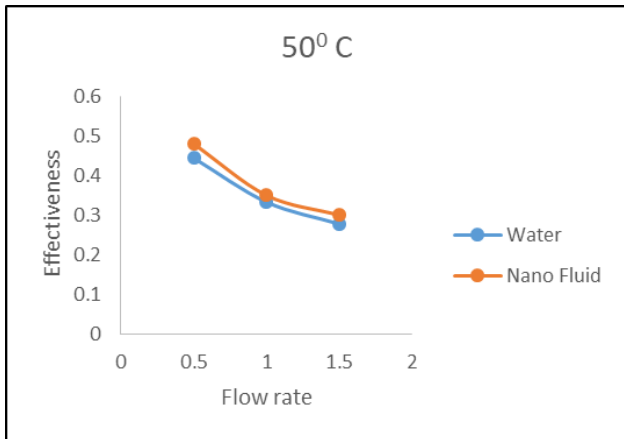


Fig. 1.8: Parallel and Shell and Tube Heat Exchanger at 50<sup>0</sup> C

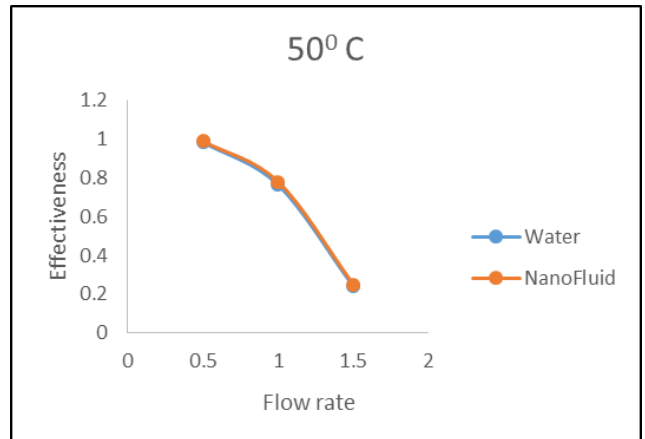


Fig. 1.11: Counter and Shell and Tube Heat Exchanger at 50<sup>0</sup> C

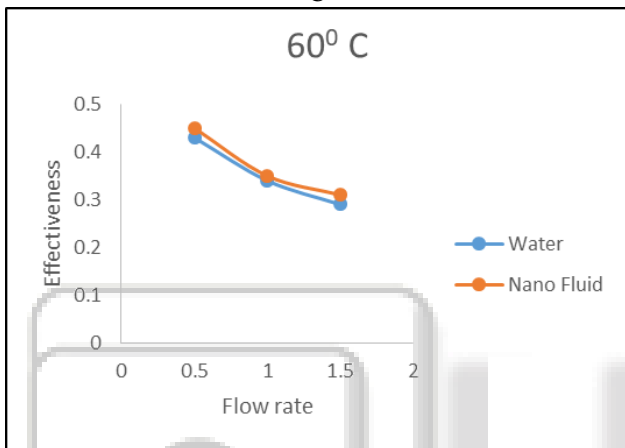


Fig. 1.9: Parallel and Shell and Tube Heat Exchanger at 60<sup>0</sup> C

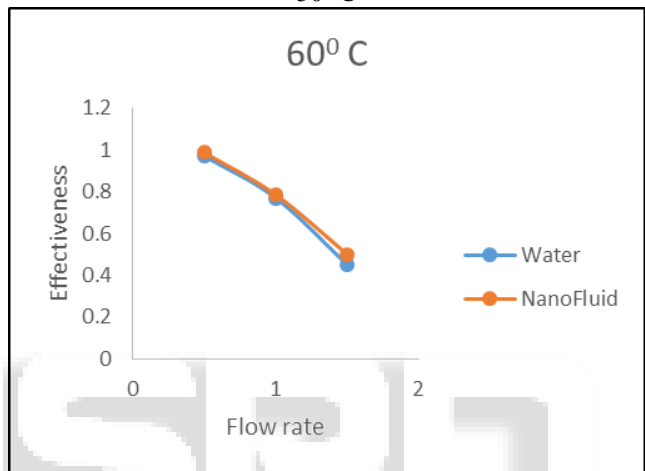


Fig. 1.13: Counter and Shell and Tube Heat Exchanger at 60<sup>0</sup> C

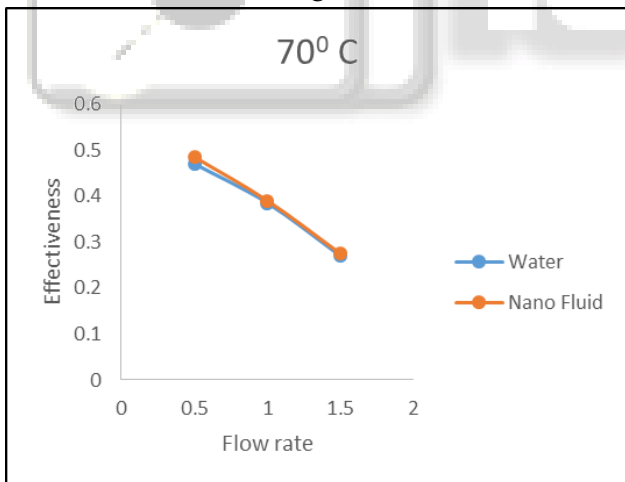


Fig. 1.10: Parallel and Shell and Tube Heat Exchanger at 70<sup>0</sup> C

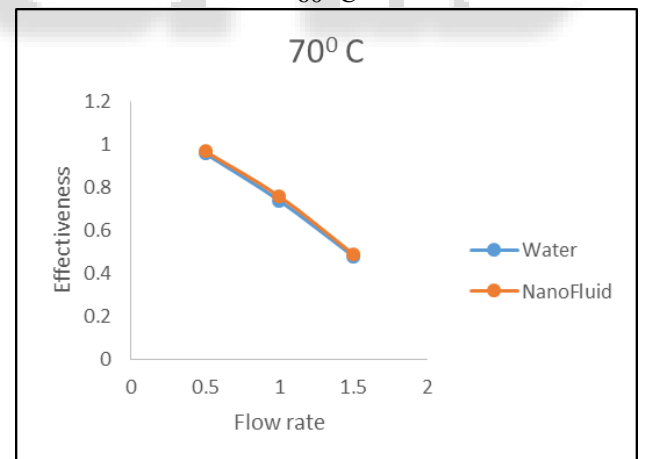


Fig. 1.14: Counter and Shell and Tube Heat Exchanger at 70<sup>0</sup> C

## V. CONCLUSIONS

Heat exchangers are widely used in industries both for cooling and heating large scale industrial processes. The type and size of heat exchangers used can be tailored to suit a process depending on the type of fluid, its phase, temperature, density, viscosity, pressures, chemical composition and various other thermodynamic properties. Experiments were conducted on various types of heat exchangers to compare

their efficiencies, effectiveness and over all heat transfer coefficients

A comparison of the results obtained on the Parallel flow heat exchanger and shell and tube Heat exchanger for different flow rates and temperature of both the fluids are shown in figures from 1.8 to 1.10, it is observed that in all graphs the nanofluid effectiveness is high compared to water. This is due to more amount of heat exchange takes place in nanofluids compare to water.

In figure 1.8 and 1.9 the effectiveness of nanofluid is too high compared to water.

A comparison of the results obtained on the counter flow heat exchanger and shell and tube Heat exchanger for different flow rates and temperature of both the fluids are shown in figures from 1.11 to 1.14, it is observed that in all graphs the nanofluid effectiveness is high compared to water. This is due to more amount of heat exchange takes place in nanofluids compare to water.

heat in leak and longitudinal conduction for low-temperature applications.

#### REFERENCES

- [1] "Heat Transfer Enhancement of Shell and Tube Heat Exchanger" - International Journal for Research in Applied Science and Engineering Technology, Vol. 2 Issue VIII, August 2014, ISSN: 2321-9653.
- [2] "Effectively Design Shell-and-Tube Heat Exchangers" - Rajiv Mukherjee, Engineers India Ltd.
- [3] "Standards of the tubular exchanger manufactures Association" - 9th edition.
- [4] "Copper Oxide Nanomaterials Prepared by Solution methods, Some Properties, and Potential Applications" - International Scholarly Research Notices, Volume 2014, Article ID 856592.
- [5] "Optimization of Shell & Tube Heat Exchanger by Baffle Inclination & Baffle Cut" - International Journal of Innovative Research in Science, Engineering and Technology, Vol.4, Special Issue 12, September 2015.
- [6] "CFD Analysis to study the effects of inclined baffles on Fluid Flow in a shell and tube Heat Exchanger" - International Journal of Research in Advent Technology, Vol.2, No.7, July 2014, E-ISSN: 2321-9637.
- [7] "Experimental Analysis of Heat Transfer Enhancement in Shell and Helical Tube Heat Exchangers" Author Name- N. Jamshidi, M. Farhadi, D.D. Ganji, K. Sedighi Dept.Mechanical Engineering Univ.Babol University of Technology College Faculty of Mechanical Engineering Babol University of Technology, Shariati street, Babol, Date 9 October 2012.
- [8] Bengt Sunden, high temperature heat exchanger, Division of Heat Transfer, Department of Heat and Power Engineering, Lund Institute of Technology, Lund University, P.O. Box 118, SE: - 22100, Lund,Sweden.
- [9] Ahmad Fakhri, "Heat Exchanger Efficiency", J. Heat Transfer 129(9), 1268-1276 (Nov16, 2006), asme.org.
- [10] Prof. S. Y. Sawant, Mr. Sagar E. More "Experimental analysis of advanced materials for Anticorrosive Heat Exchanger".
- [11] Prabhat Gupta, M.D. Atrey, "Performance evaluation of counter flow heat exchangers considering the effect of