

Study of Flow through Pipe in Multi-Stage Orifice Assembly

Rahul Rathod¹ Rabiya Tasneem² Sampreeti S³ Pavithra⁴ Abhishek M T⁵

^{1,2,3,4}UG Student ⁵Assistant Professor

^{1,2,3,4,5}Department of Civil Engineering

^{1,2,3,4,5}Dayananda Sagar College of Engineering, Bangalore, India

Abstract— Multi-stage orifice assemblies are used in many industrial processes as pressure reduction devices. Performance characteristics of orifice plates for variation in different geometrical parameters are examined with the help of computational fluid dynamics (CFD). In the present study, a CFD methodology using ANSYS, Fluent 19.1 software has been used for analyzing flow through multiple orifice plate assemblies. A parametric study is conducted for flow analysis through threefold orifice plate assemblies with diameter ratio ($\beta = 0.65$) in a pipe of 3, 4 and 5 inch diameter. It is found that a spacing between inlet to orifice and orifice to orifice is kept as $5D$. The value of Coefficient of Discharge depends on the type of flow, pressure tapping's, contour of the obstruction. The results and outcomes of the study are obtainable with velocity and pressure contours. The pressure drop and the velocity of flow along the pipe is studied.

Keywords: CFD, Coefficient of discharge (C_d), Threefold orifice plate, Beta ratio, Fluent 19.1

I. INTRODUCTION

Flow measurement is important part in many industries today. Flow can be measured with the help of velocity of the fluid over a known area. Flow measuring devices are Venturimeter, Orifice Plate, Pitot tube, Flow Nozzles, Weirs etc. Out of these orifice meter is having least coefficient of discharge. The performance of orifice meter can be improved by changing shape of plate.

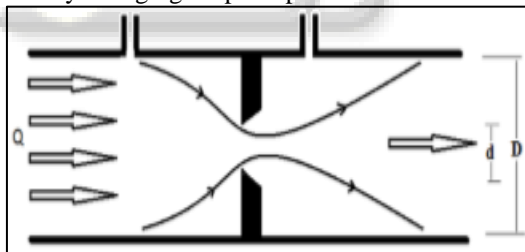


Fig. 1: Orifice Meter

An orifice plate is a plate with a hole in it which is used to measure the flow rate of flowing fluid.

When the fluid passes through the orifice the pressure increases at the upstream of the orifice and the fluid is forced to pass through the hole. Due to obstruction, the velocity increases and the pressure decreases. At downstream, flow reaches at point where velocity is maximum and pressure is minimum and this section is known as vena contracta.

G. S. Karthik et al. did the analysis on standard sharp edge orifice meter for different plate thicknesses in a pipe of 50 mm diameter and the effect of pipe diameter on coefficient of discharge has been analyzed. From the work it has been shown that if the pipe diameter is decreased below 50 mm the value of C_d increases.

Yogesh Kumar et al. did the analysis on standard sharp edge orifice meter for different plate thicknesses (3

mm, 5 mm, 10 mm and 15 mm) in a pipe of 50 mm diameter and the effect of pipe diameter on coefficient of discharge has been analyzed. The rate of coefficient of discharge depends on the type of flow, pressure tapping's, contour of the obstruction and it is a function of Reynolds number.

Mohamed A. Siba et al. studied the solution of unsteady and incompressible fluid was sought using a circular orifice as a function of three aspect ratios of 0.2, 0.4, and 0.6 taken at Reynolds number of 10000, 20000, and 30000. The study includes the velocity profile, the differential pressure, and the mechanical properties.

T. Sridevi et al. Flow analysis has been done on different types of flow meter using FLUENT solver and provision of track vena contracta has been explained.

F. Saltara et al. evaluate the coefficient of discharge of orifice plate and long radius nozzles with diameters ratio 0:50 in the Reynolds range 15,000-5,00,000. using finite-volume based commercial code FLUENT. Incompressible steady-state examines are conducted in three-dimensional domains discretized with unstructured meshes.

II. GEOMETRIC MODELING

The geometry of the orifice plates are created by using ANSYS Workbench. The analysis of flow is conducted for threefold orifice plate assemblies with diameter ratio 0.65 in a pipe of 3, 4, and 5 inch diameter. The distance between inlet of the pipe and the orifice is known as Upstream length and the distance between outlet of the pipe and the orifice is known as downstream length. It is found that the spacing between inlet to the orifice, orifice to orifice, & outlet to orifice is kept as $5D$. Where D is the diameter of the pipe.

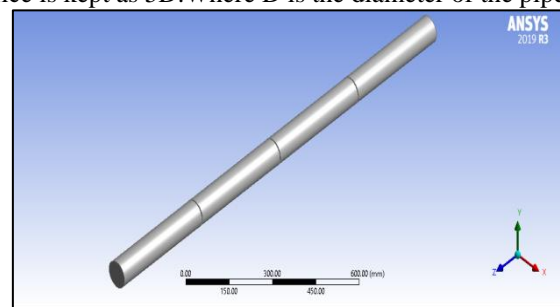


Fig. 2: Geometrical modeling of orifice pipe

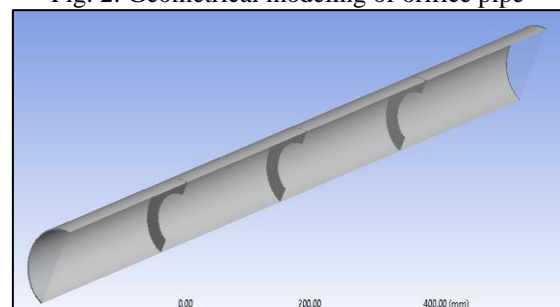


Fig. 3: Threefold orifice plate assemblies.

III. MESHING

The meshing of the pipe is done to know the how much pressure of the material is acting on each element of the pipe. The type of mesh, size of mesh & its quality affects the accuracy of results. The tetrahedral elements used for meshing. All the orifice plates surfaces and the surface of the pipe are meshed by using tetrahedral mesh. The total number of elements were 3,60,000 and total nodes were 68,152.

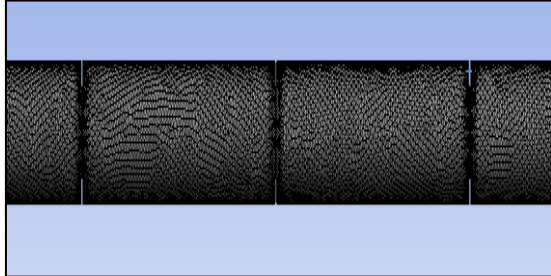


Fig. 4: Meshing of pipe

IV. BOUNDARY CONDITION

The boundary conditions are the important values for the mathematical model. The boundary condition is applied to different zones. There are different types of boundary conditions for the fluid flow to enter and exit the domain. The boundary condition is depending upon the type of fluid use for the analysis. The fluid used for this analysis is incompressible hence velocity inlet condition applies. Inlet velocity profile was assumed, slip condition is allotted to all surfaces. The boundary conditions used for the analysis are listed in table 1.

SL.NO	Quantities	Condition
1	Working fluid	Water
2	Gauge pressure	Zero Pascal
3	Inlet velocity profile	2 m/s
4	Slip	No slip

Table 1: Boundary conditions

V. ANALYSIS OF FLOW THROUGH THREEFOLD ORIFICE PLATE ASSEMBLY

The major objective of the study is to analyze the flow through multi-stage orifice plate assembly using CFD. The analysis of flow is done for the 3, 4, & 5 inch pipe having equal diameter ratio 0.65 for this velocity profile and pressure drop along the pipe is studied.

SL.N O	Diameter of pipe D (1inch=25.4m m)	Diameter of orifice d (d/D=0.65)	Spacin g 5D	Total length of pipe
1	3 inch (76.2mm)	49.53mm	381mm	1524m m
2	4 inch (101.6mm)	66.04mm	508mm	2032m m
3	5 inch (127mm)	82.55mm	635mm	2540m m

Table 2: These are the following dimension used for the analysis of flow

The meshing gave a total of 3, 60,000 that consisted of Tetrahedral. The working fluid is water. Static

pressure is allotted to the outlet pipe in order to obtain relative pressure drop between inlet and outlet. The inlet velocity profile is assumed to be uniform and set to subsonic flow of 2 m/s. The pipe is modeled as solid wall with no slip condition. The numerical correctness was set to first order. All the discretized equations were solved in a separate manner with the SIMPLE (Semi Implicit Pressure Linked Equation) algorithm.

VI. RESULTS AND DISCUSSION

At the initial length of the pipe there is developing of flow take place, means the boundary layer is getting developed. The initial velocity of flow is equal to the velocity which we have provided in boundary condition i.e. 2 m/s. As we move along the pipe there will be formation of fully developed flow and the shaded part indicates the variation of velocity as shown in the fig (5, 7, and 9). The red color indicates the maximum velocity of flow which is at the center of the pipe. Blue color indicates the minimum velocity of flow i.e 0m/s which is near the wall of pipe. The strong velocity gradient close to the wall because of the no-slip condition is observed. This region is frequently very thin, and it is then called a boundary layer. Fig 6,8,10 shows the cross section of pressure contour plots for 3, 4, &5 inch pipe along the length. From pressure contour, pressure distribution in various regions can be seen. Pressure is maximum at inlet of pipe. Due to contraction and expansion of area in the orifice plate region, the pressure decreases and then gradually increases. So, it can be seen that there is difference in pressure between inlet & outlet of pipe because some pressure losses in sections.

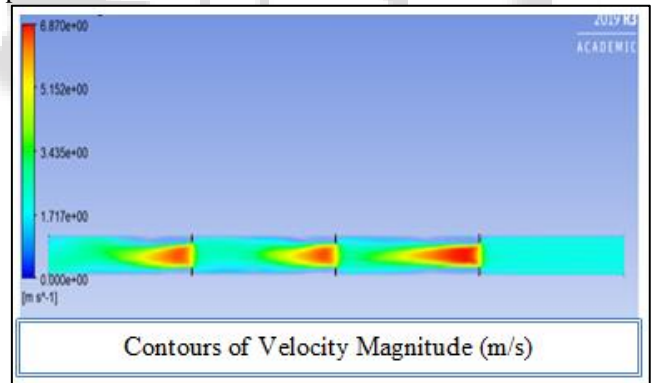


Fig. 5: Velocity Contour of 3 inch pipe: Max Value : 6.870 m/s ; Min Value : 0m/s

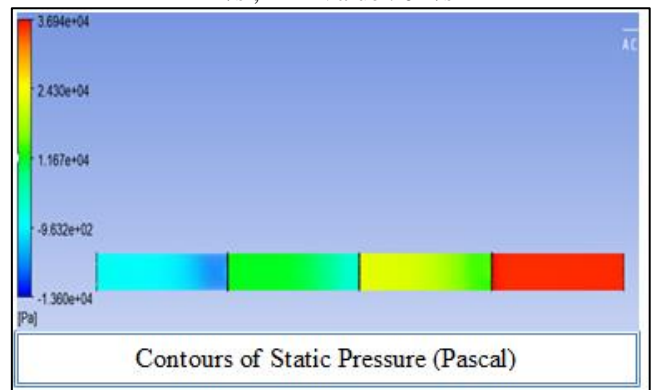


Fig. 6: Pressure contour of 3inch pipe: Max Value: 3.694e+04 Pa, Min Value:-1.360e+04

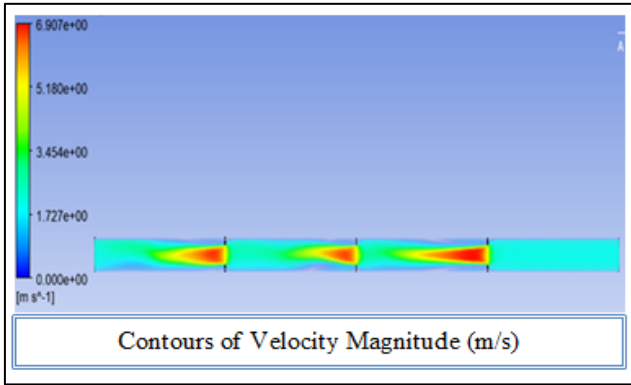


Fig. 7: Velocity Contour of 4 inch pipe: Max Value: 6.907 m/s; Min Value : 0m/s

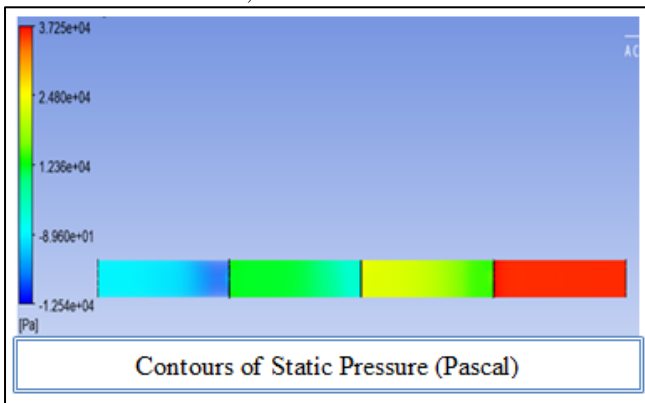


Fig. 8: Pressure contour of 4inch pipe: Max Value: 3.725e+04 Pa, Min Value: -1.254e+04

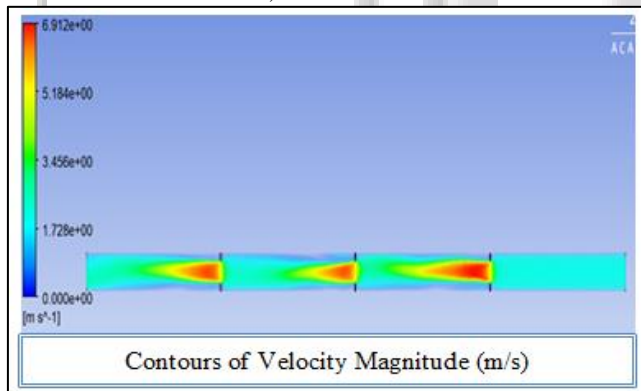


Fig. 9: Velocity Contour of 5 inch pipe: Max Value: 6.912 m/s; Min Value: 0m/s

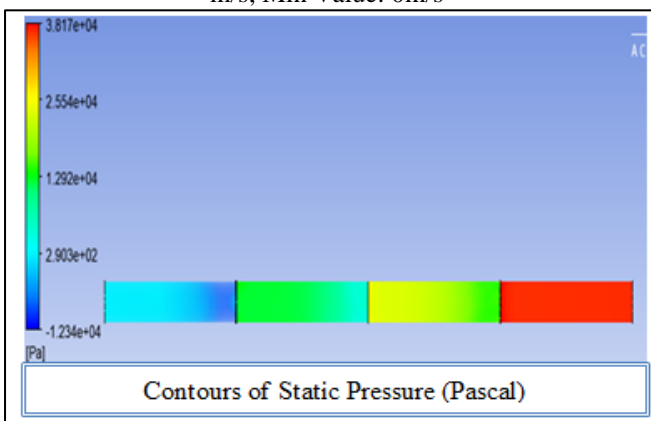


Fig. 10: Pressure contour of 5inch pipe: Max Value: 3.817e+04 Pa, Min Value: -1.234e+04

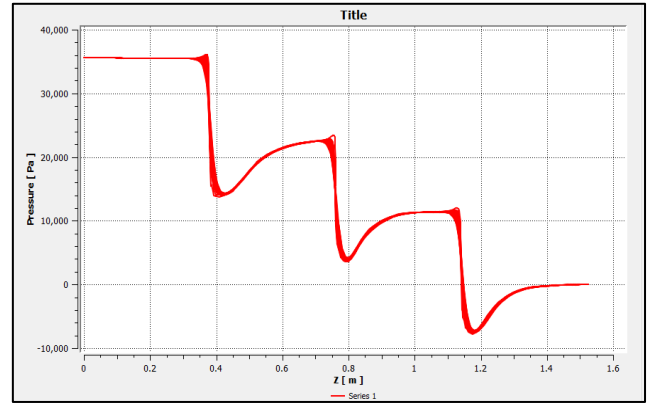


Fig. 11: Centerline pressure profile of 3 inch pipe

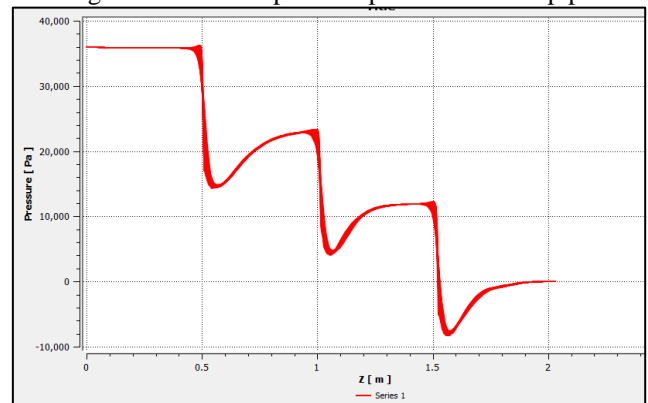


Fig. 12: Centerline pressure profile of 4 inch pipe

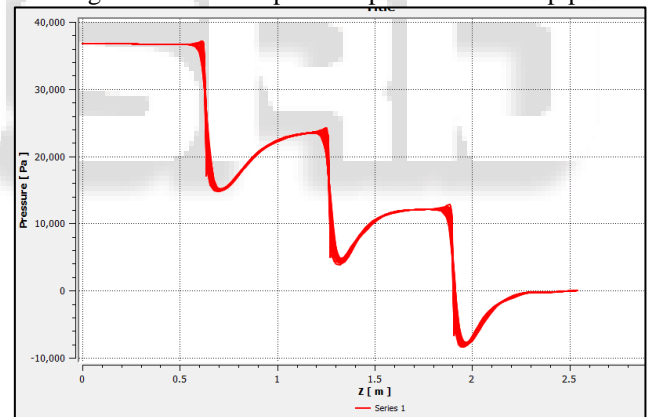


Fig. 13: Centerline pressure profile of 5 inch pipe

Fig 11, 12 & 13 shows the pressure drop along the length of the pipe .Initially at the inlet the pressure is maximum as the flow move along the pipe and approaches orifice the pressure decreases and reaches to the minimum at vena- contracta and starts recovering as the flow moves further downstream.

VII. CONCLUSION

The flow field characteristics in three-stage orifice system have been numerically investigated by considering the effects of flow inlet velocity, orifice geometry, orifice spacing on velocity and pressure distribution.

The 5 inch triple orifice arrangement pipe produces a peak velocity that is slightly higher than 3 and 4 inch pipe.

The pressure distribution profiles across the three configurations are similar but the least and highest pressure

drop were recorded in the 5 inch triple orifice pipe configuration then the 3 and 4 inch pipe.

The higher the volume for a given flow area, higher the velocity and pressure drop.

REFERENCES

- [1] Karthik G S, Yogesh Kumar K J, V Seshadri, "Prediction of Performance Characteristics of Orifice Plate Assembly for Non-Standard Conditions Using CFD". International Journal of Engineering and Technical Research (IJETR) ISSN: 2321-0869, Volume-3, Issue-5, May 2015
- [2] Junxia Gao, a, b, c and Fenghe Wu, a, c, "Investigation of flow through the two-stage orifice". ENGINEERING APPLICATIONS OF COMPUTATIONAL FLUID MECHANICS 2019, VOL. 13, NO. 1, 117–127.
- [3] Abdulrazaq A. Araoye, Hasan M. Badr, Wael H. Ahmed, "Dynamic Behaviour of Flow through Multi-Stage Restricting Orifices". Proceedings of the 3rd International Conference on Fluid Flow, Heat and Mass Transfer (FFHMT'16) Ottawa, Canada – May 2 – 3, 2016 Paper No. 161.
- [4] Mohan Kumar H M, Yogesh Kumar K J, Dr. V Seshadri, "CFD Analysis of Flow through Dual Orifice Plate Assembly". International Journal of Emerging Technology and Advanced Engineering Website: www.ijetae.com (ISSN 2250-2459, ISO 9001:2008 Certified Journal, Volume 5, Issue 10, October 2015).
- [5] Akshay Dandwate, Sagar Mittal, Oshin Umale, Pallavi Shelar, Rahul Bajaj, "Effect of Orifice Plate Shape on Performance Characteristics. IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) e-ISSN: 2278-1684, p-ISSN: 2320-334X, Volume 13, Issue 4 Ver. VII (Jul. - Aug. 2016), PP 50-55.
- [6] Malatesh Barki., Ganesha T, Dr. M. C. Math, "CFD Analysis and Comparison of Fluid Flow Through A Single Hole and Multi Hole Orifice Plate". International Journal of Research in Advent Technology, Vol.2, No.8, August 2014 E-ISSN: 2321-9637.