

A Review Paper on: Buildings Using Step-Back, Step-Back Set-Back, and Set-Back Seismic Analysis

Harsh Patel¹ Tarun Patel² Nipa Chauhan³

¹PG Student ^{2,3}Assistant Professor

^{1,2}Department of Structural Engineering

^{1,2}Gokul Global University, Siddhpur, Gujarat, India ³Institute of Architecture H.N.G. University, Patan, Gujarat, India

Abstract— Earthquake is the shaking of the earth's surface, and it is one of nature's most destructive and unexpected phenomena. Plate tectonics movement, volcanic eruptions, or man-made explosions cause earthquakes, which last for a brief time, usually less than a minute. Aftershocks accompany larger earthquakes; this earthquake was the most violent and deadly, killing many people and destroying many important properties. Since the 1934 Nepal-Bihar earthquake, it has been a disaster-causing earthquake in India. These densely inhabited hilly areas, including remote settlements perched on hilly areas, experienced catastrophic property damage and many innocent lives were lost. This paper uses the seismic coefficient approach in ETABS v16 to try to explain the behaviour of hillside buildings. Three types of buildings are studied: step-back (SBB), step-back set-back (SBSB), and set-back (SB) buildings with three to five stories. The seismic susceptibility associated with their dynamic response qualities is investigated and contrasted. To fully comprehend the analysis result and configure the suitability of each structure, the comparison is presented in the form of charts. SBB is proven to be more lethal than other types of structures, and the usage of shear walls and bracing is found to be effective in improving building seismic performance.

Keywords: Sloping Ground, Static & Dynamic Behavior, Set Back and Step Back Building, Regularities, Irregularities of Building

I. INTRODUCTION

The behaviour of buildings during earthquakes is influenced by a number of unknown elements. The current research examines and compares the seismic vulnerability of three building configurations, namely SBB, SBSB, and SB buildings, by comparing dynamic response properties such as fundamental time period, base reaction, base shear, displacement, and forces induced such as shear force, bending moment, and torsional effect on buildings.

SBB buildings have both regular and short columns of the same height down the slope, but SBSB buildings have all columns of varied heights. SB structures are structures that are similar to those built on flat ground and have regular-sized columns.

In Fig. 1 the plan which is made on AutoCAD is given. On which our project is based and we are going to analyze and design this structure by Etabs.

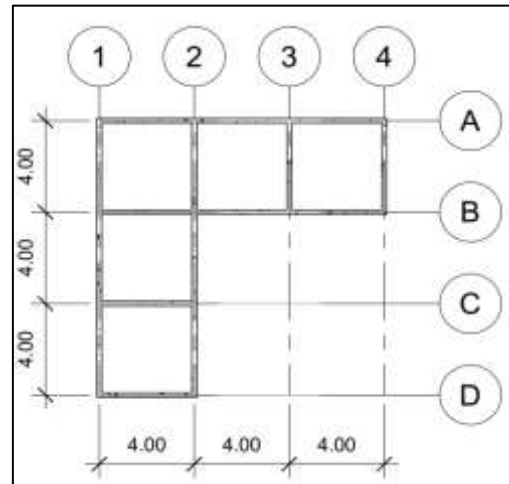


Fig. 1: Plan

II. LITERATURE REVIEW

A. Seismic Response of Irregular Building on Sloping Ground. Authors: Anjeet Singh Chauhan (2021)

The behaviour of structures during earthquakes is determined by their mass and stiffness distribution in both horizontal and vertical planes. Buildings built in steep areas are vulnerable to major earthquakes. Under seismic loads, investigate the structural performance of multi-story step back RC buildings positioned on 20°, 30°, 40°, and 45° slopes.

B. Seismic Analysis of Multi-storeyed Building on Sloping Ground with Ground, Middle and Top Storey Tanuja V Keneror 2020

The study is carried out using the response spectrum analysis method for a combination of four different slopes and different building configurations, and various parameters are tested against various limitations and findings derived from various construction scenarios. Investigate how shear walls can help soft storey RC buildings on perate better on sloping terrain

C. Effect of slope angle variation on the structures resting on hilly region considering soil-structure interaction Authors: Rahul Ghosh 2019

Examine the impact of varying slope angles on structures sitting on sloping terrain, taking into account both fixed and flexible foundation structures (SSI). The analysis is carried out using the equivalent static force technique (ESFM), the response spectrum method (RSM), the time history method (THM), the nonlinear static method (NLSM), and the nonlinear time history method (NLTHM) (NLTHM). With and without SSI consideration, the criticality related with

increasing slope angle. The significance of SSI in seismic analysis is also revealed.

D. Analysis of 2d Frame (g+10) Building on Sloping Ground Authors: B.Rohini, Sagar Jamle 2018

The columns in the ground storey are of varying heights, with a short column on one end and a large column on the other. The dynamic characteristics of hill buildings differ from those of flat-ground structures. Because of the difference in stiffness and mass along the horizontal and vertical planes during ground motion, the torsion effect of such structures is harmed. The Response Spectrum Method was used to conduct an analysis that included storey displacement in the X and Z dimensions, as well as storey drift, storey shear, and time period.

E. Seismic Response of RC Framed Buildings Resting on Hill Slopes Authors: Zaid Mohammada, Abdul Baqib, 2017

The height and length of hill structures vary geometrically. In total, eighteen analytical models were subjected to seismic forces along and across hill slope directions, and the Response Spectrum Method was used to assess the results. shear forces induced in foundation columns, fundamental time periods, maximum top storey displacements, storey drifts, and storey shear in buildings, all of which were compared within the hill building designs evaluated.

F. Performance evaluation of setback buildings with open ground story on plain and sloping ground under earthquake loadings and mitigation of failure Authors: Rahul Ghosh Rama Debbarma ,2017

Extreme responses for open ground storied setback buildings were recorded using three different methods: equivalent static force method, response spectrum method, and time history method. To mitigate this soft storey effect and the extreme responses, three different mitigation techniques were used, and the best solution among these three techniques was presented.

G. Lateral stability of multi-storey building on sloping ground Authors: Nagarjuna, Shiva Kumar B. Patil 2015

The top storey displacement and time period decrease as the slope angle increases in the equivalent static method and response spectrum method. In both step back and step back setback buildings, the maximum base shear is at 20 degrees.

H. Performance based seismic design of RCC buildings with plan irregularity Authors: Ashish R. Akhare, Abhijeet A. Maske 2015

Torsion is the most important component that causes substantial structural damage or full collapse. Torsion is commonly generated by eccentricity in irregular

I. Seismic analysis of buildings resting on sloping ground with varying number of bays and hill slopes Authors: Dr. S. A. Halkude, Mr M. G Kalyan Shetty, Mr V. D. Ingle 2013

Step back frames may be more hazardous than other building frame types during earthquake performance. Time duration and top storey displacement decrease as hill slopes increase. Time duration and top storey displacement decrease as the number of bays increases. As a result, it is established that under seismic conditions, a larger number of bays is better.

When compared to step back and set back frames, step back and set back frames produce less torsion effects.

J. Influence of soil-structure interaction in seismic response of step backset back buildings Authors: Prabhat Kumar, Sharad Sharma and A.D. Pandey 2012

The dynamic shear ratios in the X and Y directions show a trend that differs from the static shear ratios. In dynamic analysis, the ratio of shear force in columns at ground level increases with increasing height in both directions for all types of soils from high point columns to low point columns (X and Y).

III. CONCLUSIONS

The study papers conclude that the Etabs software employs the Limit state approach, and that the Etabs programme provides the value and diagram of the shear force operating on the structure, as well as the value and diagram of the bending moment. It also produces cost-effective results. Also, a comparative research is conducted between shear structure and frame structure. The results of the studies suggest that frame structure is more cost effective than shear structure, although shear structure is better suited to earthquake-prone areas.

REFERENCES

- [1] Er. Anjeet Singh Chauhan "Seismic Response of Irregular Building on Sloping Ground" Science, vol. 294, Dec. 2001, pp. 2127-2130, doi:10.1126/science.1065467.
- [2] Tanuja V Keneror, Vaijanath Halhalli "Seismic Analysis of Multistoried Building on Sloping Ground with Ground, Middle and Top Soft Storey".
- [3] Rahul Ghosh1 · Rama Debbarma "Effect of slope angle variation on the structures resting on hilly region considering soil-structure interaction" <https://doi.org/10.1007/s40091-019-0219-3>.
- [4] B.Rohini,C.Lakshmi Gowri, T.Jyothirmayee "Analysis Of 2d Frame(G+10) Building On Sloping Ground"
- [5] Zaid Mohammada,, Abdul Baqib, Mohammed Arif "Seismic Response of RC Framed Buildings Resting on Hill Slopes" Peer-review under responsibility of the organ
- [6] Agarwal, P. K. and Shrikhande, M. "Earthquake Resistant Design of Structure" Fourth Edition, Prentice Hall 2006.
- [7] Ashwani, K., Pushplata, "Building Regulations for Hill Towns of India", HBRC Journal, 2014.
- [8] Babu, N. J. and Balaji, K.Y.G.D, "Pushover analysis of unsymmetrical framed structures on sloping ground" International Journal of Civil, Structural, Environmental and Infrastructure Engineering Research and Development (IJCSEIERD) ISSN 2249-6866 Vol. 2 Issue 4 Dec - 2012 45-54.
- [9] Bathe, K. J., "Finite Element Procedures in Engineering Analysis", Prentice-Hall, (1982).
- [10] Birajdar, B. G. and Nalawade, S. S., "Seismic analysis of buildings resting on sloping ground", 13th World Conference on Earthquake Engineering, Vancouver, B.C., Canada, Paper No. 1472, 2004.

- [11] Chatpan, C. and Chopra, A.K., "Evaluation of modal pushover analysis using generic frames", *Earthquake Engineering and Structural Dynamics*, vol. 32, No.3, pp. 417-442, 2003.
- [12] IS 456 (2000): Plain and Reinforced Concrete - Code of Practice

